


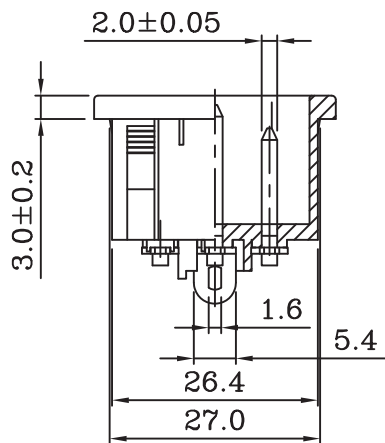
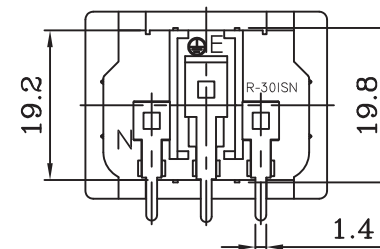
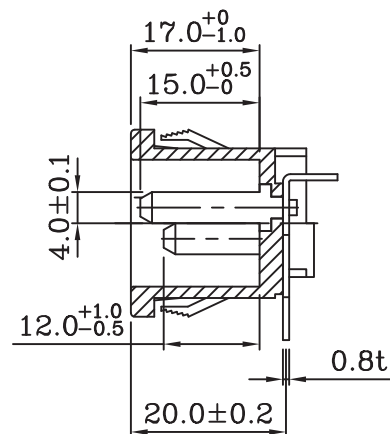


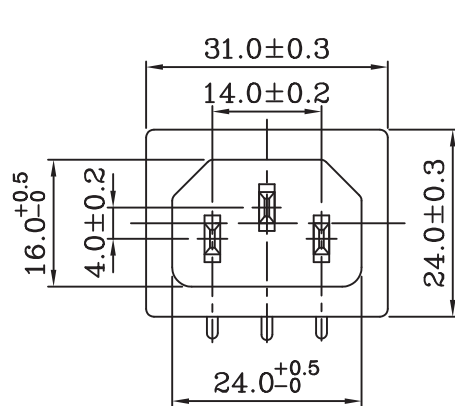

THICKNESS	C
0.8t-1.0t	20.1
1.0t-1.2t	20.2
1.2t-1.5t	20.2
2t	20.3
3.5t	20.4

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-0~2.

Rating: AC 10A 250V	
Mark	Safety Regulation
	CCC
	VDE
	ENEC
Rating: AC 15A 250V	
Mark	Safety Regulation
	UL
	CUL


DRAWING: C:\DG\NEW-R\T\301SN\R-301SN(12).DWG

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 台北縣中和市中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net



DRAWN BY

UNIT
mm

RD
100.08.22
張育誠

UNIT QTY

1

APPROVED BY

SCALE
1:1

RD
100.08.22
戴銘璋

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO

110822A02

DESCRIPTION

PRODUCT NO.

SWR-301SN (12)

INTERIM NO.

NEW NO.

REV

D