
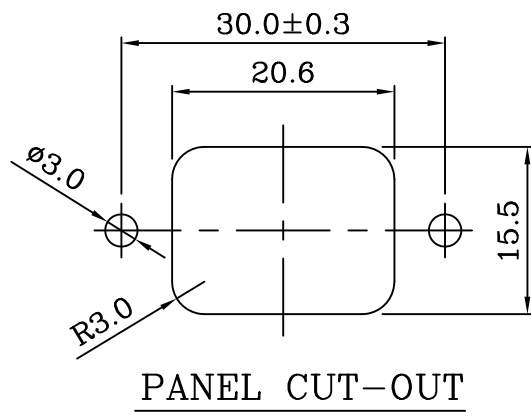
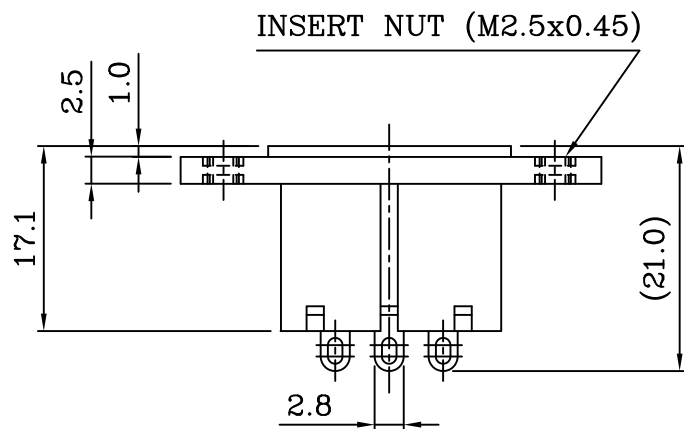
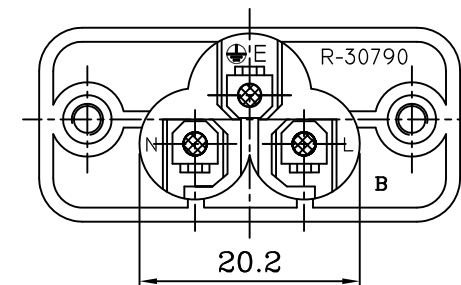
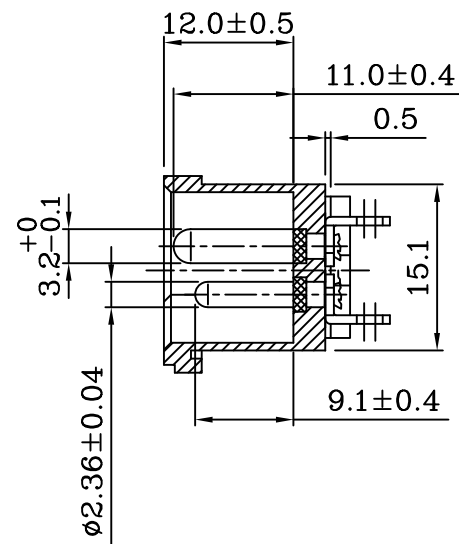


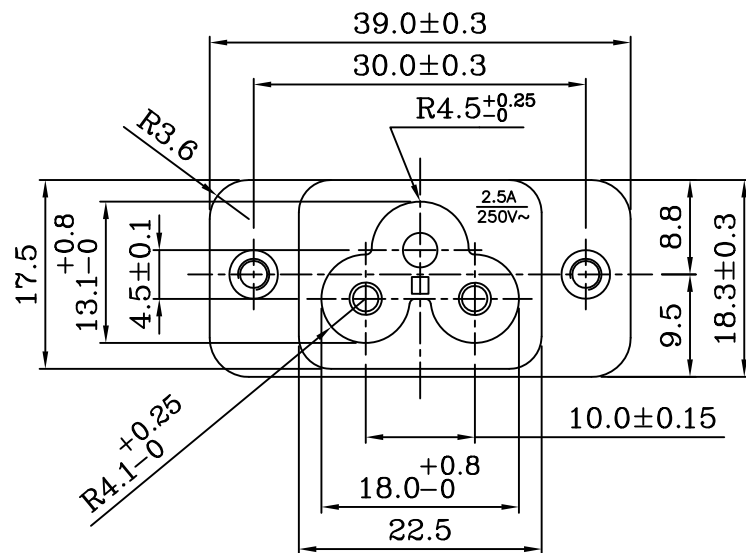

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Filled Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V	
Mark	Safety Regulation
cULus	cULus
CCC	CCC
VDE	VDE
EN10	ENEC


IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 台北縣中和市中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY

UNIT
mm

UNIT QTY
1

SCALE
1:1

TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.

SWR-307(B00)

REV

李
2010.8.28
小英

APPROVED BY

羅
2010.8.28
士凱

ID NO 10082801Q

DESCRIPTION

INTERIM NO.

NEW NO.

B