


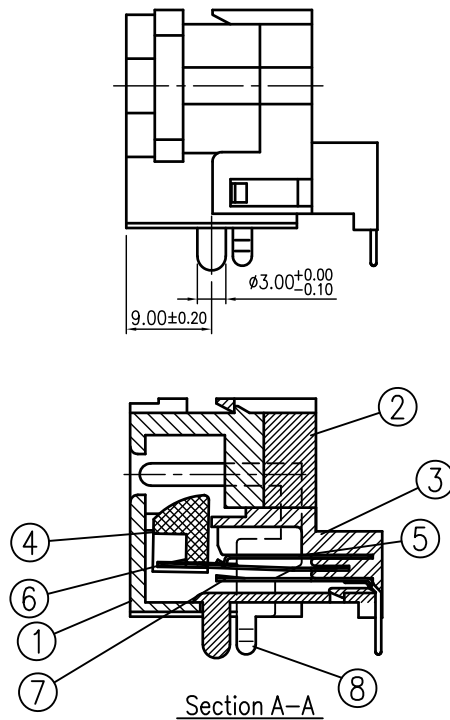


A
B
C
D
E

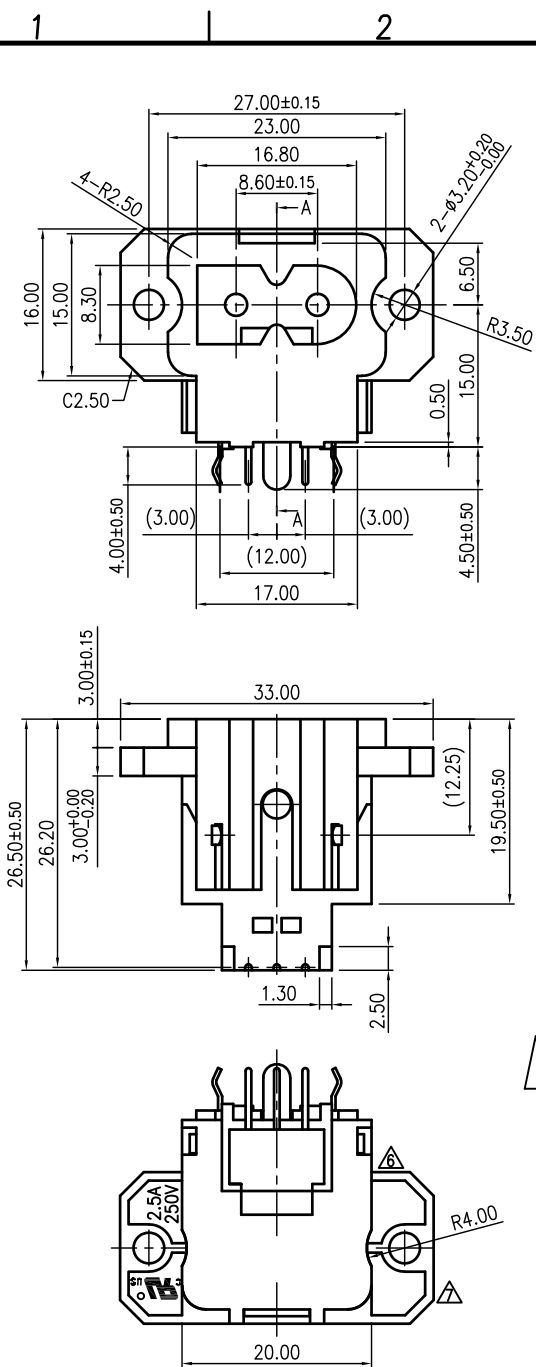

REVISIONS					
LTR	DESCRIPTION	DATE	REV.	CHKD.	APVD.
△x1	To change the mark of housing (ECR C03150547)	2015.07.06	陳衛兵	張啟濤	陳宗碧
△x2	Cancel the CSA mark (CSA Reference No) ECR C03180591	2019.06.11	李阮龍	李阮龍	李阮龍

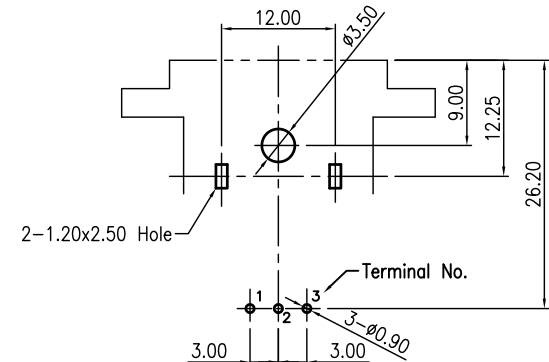

PCB Layout Dimension (Tolerance:±0.10)
(Recommend min. Dimension)(Bottom View)

△Note:
Approved Standard: UL&cUL FILE NO.E95834

8	PIN	2	C2680	t=0.40	MBCu2μm-Sn3μm
7	SHUNT SPRING(B)	1	C2680	t=0.30	MBCu2μm-Ag0.6μm
6	TIP SPRING	1	C5191	t=0.30	MBCu2μm-Ag0.6μm
5	SHUNT SPRING(A)	1	C5191	t=0.30	MBCu2μm-Ag0.6μm
4	SEPARATOR	1	PBT(SHINKONG D202)		Black
3	BASE	1	PPO(SABIC RESIN)UL 94V-0		Black
2	COVER	1	PPO(SABIC RESIN)UL 94V-0		Black
1	HOUSING	1	PBT+30%GF(SHINKONG D202G30)UL 94V-0		Black
LTR	PART NAME	Q'TY	MATERIAL		REMARK
120~315	±0.50	DWN	JAER	DATE	2003.12.08
30~120	±0.35	DSND	SHIAN	DATE	1992.10.07
6~30	±0.22	CHKD	蘇建源	DATE	2008.12.09
BELOW 6	±0.16	APVD	龔雲輝	DATE	2008.12.09
DIMENSION	TOLERANCE	SWEETA PRODUCTS CORPORATION			
					NAME AC POWER SOCKET CAT. NO. SWHJC-021A-P DWN.NO. A-021A-P
					1/1 H

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.30 ANGLES:±5°

The raw material specified by Sony should meet SS-00259 requirement of the latest version. When such material is used, it should be supplied by Sony designated suppliers.