

SWEETA PRODUCTS CORPORATION

SPECIFICATION

TITLE AC POWER SOCKET	SPC. NO. SWHJC-034	PAGE : 1 OF 6 DATE : 2003.12.18
---------------------------------	------------------------------	--

SPECIFICATION

1. Standard atmospheric condition :

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows :

Ambient temperature : 15°C to 35°C

Relative humidity : 45% to 85%

Air pressure : 86kPa to 106kPa

If there is any doubt about the results, measurements shall be made within the following limits :

Ambient temperature : 20 ±2°C

Relative humidity : 60% to 70%

Air pressure : 86kPa to 106kPa

Storage Temperature Range : -20°C to 65°C

Operating Temperature Range : -10°C to 55°C

Operating temperature range is the range of ambient temperature for the component that can be operated continuously at rated voltage and rated current.

2. Electrical characteristics :

	Item	Condition	Specifications
1	Rated voltage Rated current		AC 250V 2.5A
2	Dielectric strength	Power socket shall withstand Δ 4000V AC (50 to 60Hz) . Alternating current between each pin terminal for one minute.	Without damage to parts, arcing or breakdown, etc.
3	Insulation resistance	A voltage of 500V DC shall be applied for 1 minute. After which measurement shall be made.	100M Ω MIN.
4	Contact resistance	Measurement shall be made at 1000Hz with small current (AC 100mA MAX.)	30m Ω MAX.

ISSUE	DATE	WRTN	CHKD	APVD	DESCRIPTIONS
	2003.12.18	STEVEN	KUNG	KUNG	
Δ x2	2007.12.20	JACKAL	JOHNSON	DICK	修改 Solder ability 、Resistance to soldering heat
Δ x3	2010.09.21	Paul Chiang	MIMO	Helen Kuo	Modify item 2.2 ; Add item 7 、 8 。

SWEETA PRODUCTS


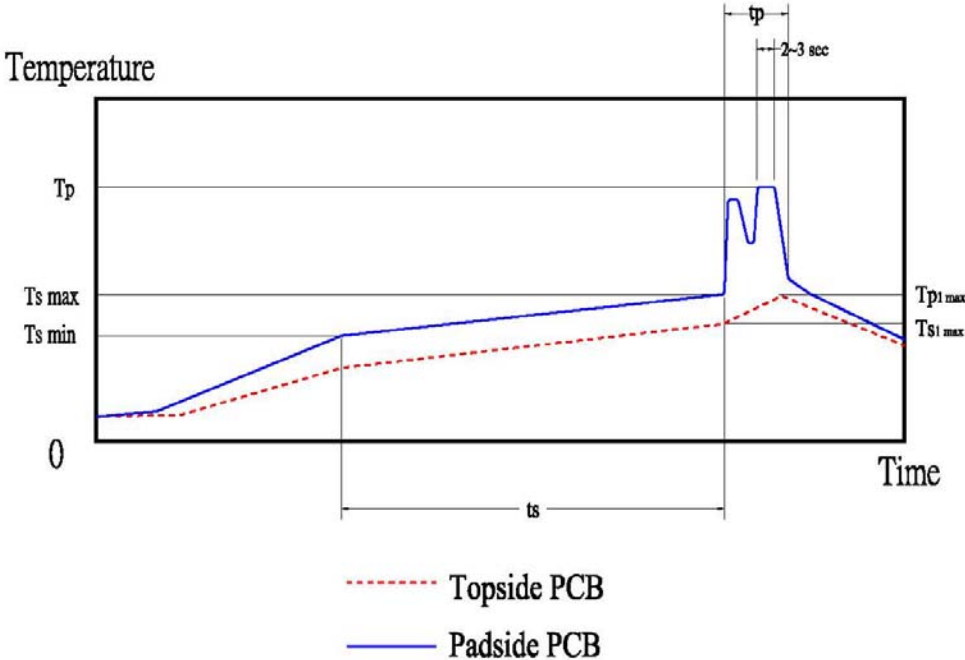
CORPORATION

SPECIFICATION

TITLE		SPC. NO.	PAGE : 2 OF 6
AC POWER SOCKET		SWHJC-034	DATE : 2003.12.18
3. Mechanical characteristics			
	Item	Condition	Specifications
1	Operating force	Insertion and withdrawal force shall be measured by using a gauge of standard dimensions.	3.92N~49N (0.4kgf~5kgf)
2	Terminal strength	A static load of 29.4N (3kgf) shall be applied to the tip of the terminals for 5 seconds in any direction.	Without cracks or excessive looseness to the terminal. Electrical and mechanical characteristics shall be satisfied. Without play in terminal, etc.
3	Strength of tapping part	The tapping part shall be capable of a torque of 98N-cm (10kgf-cm) for 5 seconds by M3X8 tapping tight screw and panel (t=1)	The socket shall not be broken.
4. Endurance characteristics			
	Item	Condition	Specifications
1	Solder ability △	Temperature of solder : 250℃±5℃ Time of dip : 3±0.5 seconds Length of dip : 2±0.5mm (from top of terminal)	The soldered area shall be covered a minimum of 90% of the surface being immersed.
2	Humidity test	The socket shall be stored at a temperature of 40℃±2℃ and a humidity of 90%~95% for 96 hours, and shall then be returned and allowed to remain at room condition for a period of 30 minutes, and blew off any water drops on the surface of the socket by air.	Electrical and mechanical characteristics shall be satisfied.
3	High temperature	The socket shall be stored for 96 hours at a temperature of 70±2℃, and shall then be returned and allowed to remain at room condition for a period of 30 minutes, after which measurement shall be made.	Electrical and mechanical characteristics shall be satisfied.
4	Low temperature	The jack shall be stored for 96 hours at a temperature of -25℃±3℃, and shall then be returned and allowed to remain at room condition for a period of 30 minutes, after which measurement shall be made.	Electrical and mechanical characteristics shall be satisfied.
		Contact resistance	100mΩ MAX.

SWEETA PRODUCTS CORPORATION


SPECIFICATION

TITLE		SPC. NO.		PAGE : 3 OF 6		
AC POWER SOCKET		SWHJC-034		DATE : 2003.12.18		
	Item	Condition		Specifications		
5	Resistance to Soldering Heat Test 	Wave soldering Process				
		Profile Feature	Pb-Free Assembly		Electrical and mechanical characteristics shall be satisfied, and not show remarkable failure.	
			Topside PCB	Padside PCB		
		Preheat -Temperature min -Temperature max -Time (t _s min to max)	120℃ (T _{sl} max)	110℃ (T _s min) 150℃ (T _s max) 75 sec		
		Peak/Classification Temperature	165℃ (T _{pl} max)	260℃ ±5℃ (T _p)		
		Time within 5℃ of actual Temperature (t _p)		10 sec (within 2 times every time 2-3 sec)		
		Time 25℃ to Peak temperature		3 minutes max		
		Wave Soldering Temperature Profile are as below				
						
		Soldering Iron Test				
		Temperature of soldering Iron : 380±10℃				
		Soldering time : 3±1 seconds				
		Same as Wave soldering Process				
		Insertion force				
3.92N~49N (0.4kgf~5kgf)						
Withdrawal force						
3.92N~49N (0.4kgf~5kgf)						

SWEETA PRODUCTS CORPORATION


SPECIFICATION

TITLE AC POWER SOCKET	SPC. NO. SWHJC-034	PAGE : 4 OF 6 DATE : 2003.12.18
---------------------------------	------------------------------	--

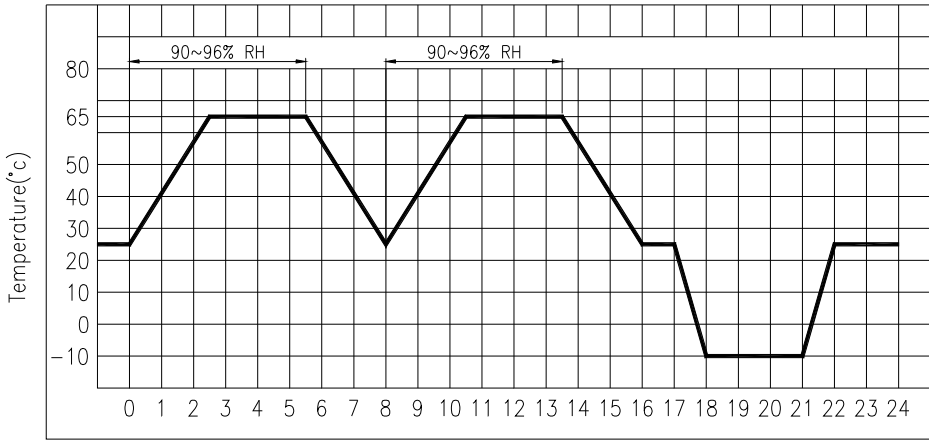	Item	Condition	Specifications
6	Composite temperature/humidity cyclic test	The power sockets shall be subjected to the conditions as shown in below, and then shall be returned and allowed to remain in room ambient condition for 30 minutes.	Electrical and mechanical characteristics shall be satisfied.
		Contact resistance	100mΩ MAX.
		 <p style="text-align: center;">Time in hours (h)</p> <p style="text-align: center;">(4 CYCLES)</p>	
7	Operating endurance	The life test shall consist of 2000 times of insertion and withdrawal with the mate plug at a rate of 20 to 30 times per minute under no load. Testing plug with putting electric conducted grease to avoid overheating and friction.	Electrical and mechanical characteristics shall be satisfied.


TITLE AC POWER SOCKET	SPC. NO. SWHJC-034	PAGE : 5 OF 6 DATE : 2003.12.18
---------------------------------	------------------------------	--

5.Mating plug :

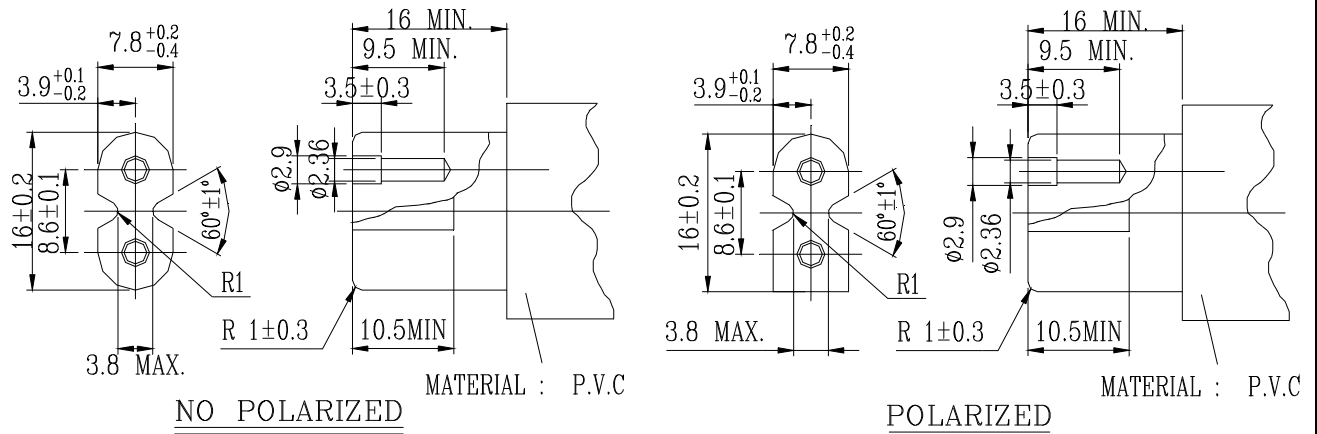

When above cord spec is inserted into or withdrawal from AC SOCKET, internal switch of AC SOCKET should be no problem.

6. Testing plug :

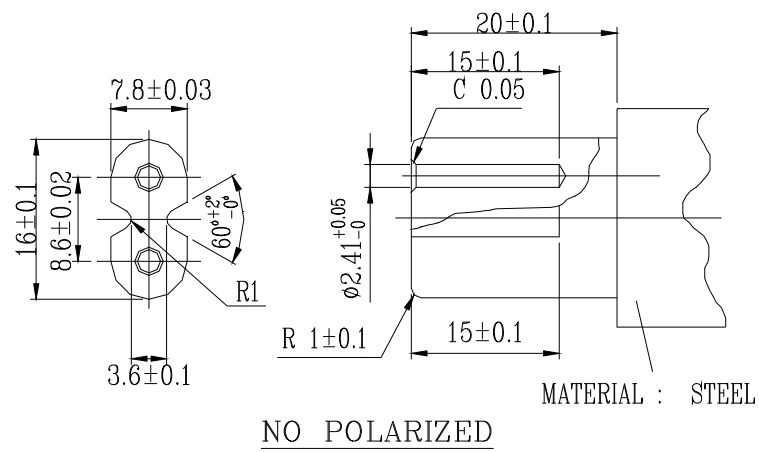

△7. Soldering condition shelf life about 6 months depend on storage condition of humidity, temperature and others factors.

SWEETA PRODUCTS CORPORATION

SPECIFICATION

TITLE AC POWER SOCKET	SPC. NO. SWHJC-034	PAGE : 6 OF 6 DATE : 2003.12.18
---------------------------------	------------------------------	--

△8. Endurance test sequence

Test group		A	B	C	D	E	F	G	H	I
Test sequence		A	B	C	D	E	F	G	H	I
Test Item		A	B	C	D	E	F	G	H	I
2.2	Dielectric strength	1,6			1,6	1,6	1,6	1,6	1,6	1,6
2.3	Insulation resistance	2,7			2,7	2,7	2,7	2,7	2,7	2,7
2.4	Contact resistance	3,8			3,8	3,8	3	3,8	3	3,8
3.1	Operating force	4,9			4,9	4,9	4,8	4	4,8	4,9
3.2	Terminal strength	5								
3.3	Strength of tapping part		1							
4.1	Solderability			1						
4.2	Humidity test				5					
4.3	High temperature					5				
4.4	Low temperature						5			
4.5	Resistance to Soldering Heat Test							5		
4.6	Composite temperature/humidity cyclic test								5	
4.7	Operating endurance									5

Test sample quality : 2 pcs min. / group