
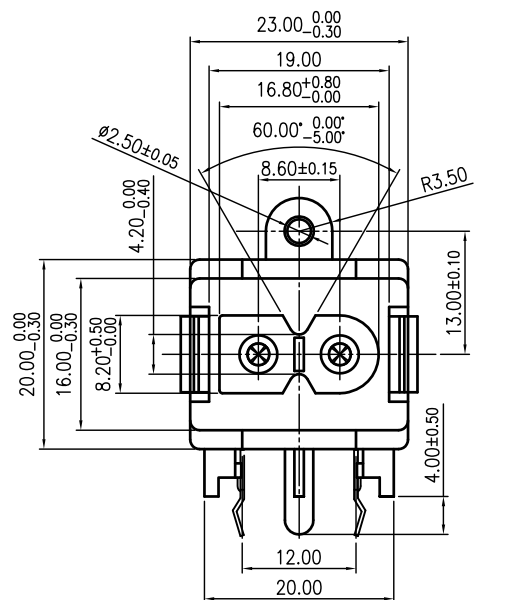
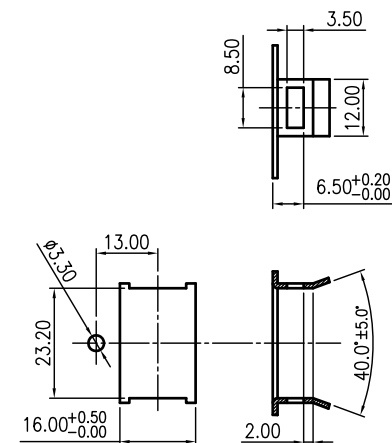
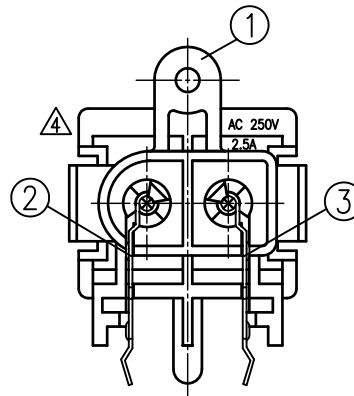


PCB Layout Dimension (Tolerance:±0.10)
(Recommend min. Dimension)(Bottom View)

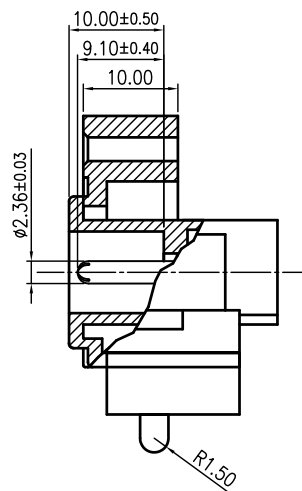

PANEL

REFERENCE DRAWING
(TOLERANCE : ± 0.1)

531 Note : Approved Standard: UL&cUL FILE NO.: E95834

REVISIONS					
LTR	DESCRIPTION	DATE	REV.	CHKD.	APVD.
△x1	安規編號更新	2005.04.28	鍾昌明		夏正雄
△x1	修正產品 UL Logo	2008.07.16	鄭伍豐	陸昌妹	蔡志祿
△x2	CSA認證撤銷, 將認證標記註銷, 註銷CSA080026, 撤銷UL認證	2008.07.16	鄭伍豐	陸昌妹	蔡志祿
△x1	To change the mark of housing (ECR C03150547)	2015.07.09	陳衛兵	張啟濤	陳宗碧
△x2	Cancel the CSA mark (CSA Reference No) ECR C03150547	2018.08.10	李阮龍	李阮龍	李阮龍

		3	PIN-2	1	C2680R	t=0.40	MBCu-Sn plated
		2	PIN-1	1	C2680R	t=0.40	MBCu-Sn plated
		1	HOUSING	1	PPH0X(N225/N225X)	UL 94V-0	Black
LTR		PART NAME		Q'TY	MATERIAL		REMARK
120~315	±0.50	DWN	劉怡廷	DATE	2005.04.28	SCALE N/A	NAME
30~120	±0.35	DSND	蘇建源	DATE	1999.04.17	PROJECTION	AC POWER SOCKET
6~30	±0.22	CHKD	夏正雄	DATE	2005.04.28		CAT. NO.
BELOW 6	±0.16	APVD	楊仲民	DATE	2005.04.28	UNIT:mm	SWHJC-035A-P
DIMENSION	TOLERANCE	SWEETA PRODUCTS CORPORATION					DWN.NO. A-035A-P
							1/ E-00

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.30 ANGLES:±5°

The raw material specified by Sony should meet SS-00259 requirement of the latest version. When such material is used, it should be supplied by Sony designated suppliers.