
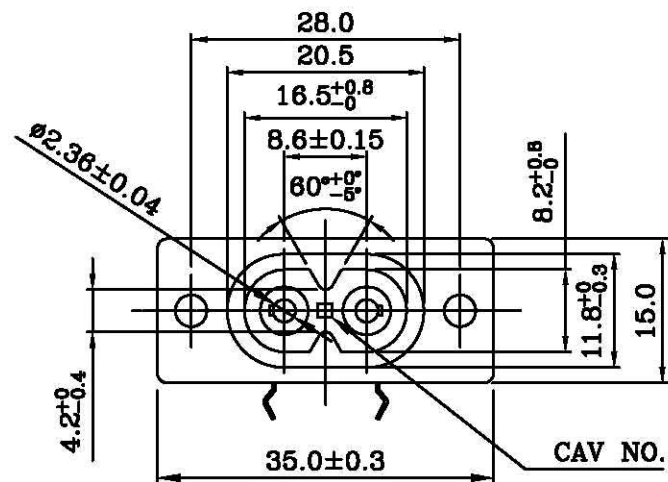
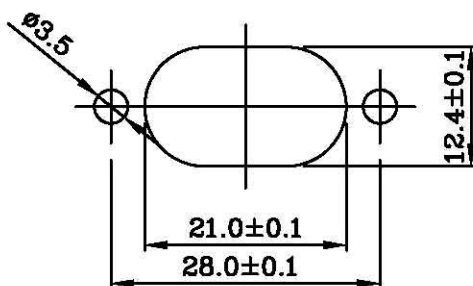


P.C.B. LAYOUT

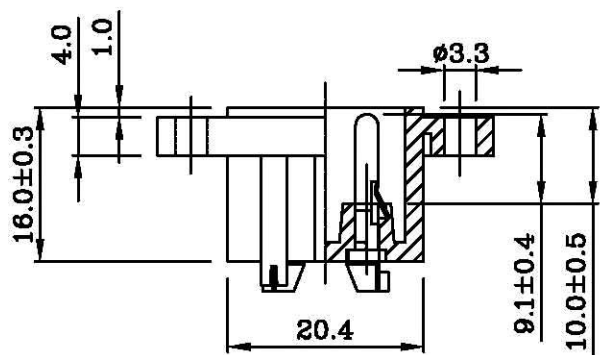

PANEL CUT-OUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Filled Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V	
Mark	Safety Regulation
cULus	cULus
CCC	CCC
VDE	VDE
ENEC	ENEC

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意: 此圖只供參考

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓
Tel : 02-2226-8001 Fax : 02-2226-8002
http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY

UNIT
mm
DRAWN BY
李
2010.9.08
小英

UNIT Q'TY
1
APPROVED BY

SCALE
1:1
APPROVED BY
羅
2010.9.08
士凱

TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3
ID NO
10090803Q
DESCRIPTION

PRODUCT NO.
INTERIM NO.
NEW NO.

SWR-201A90(B00)

REV
B