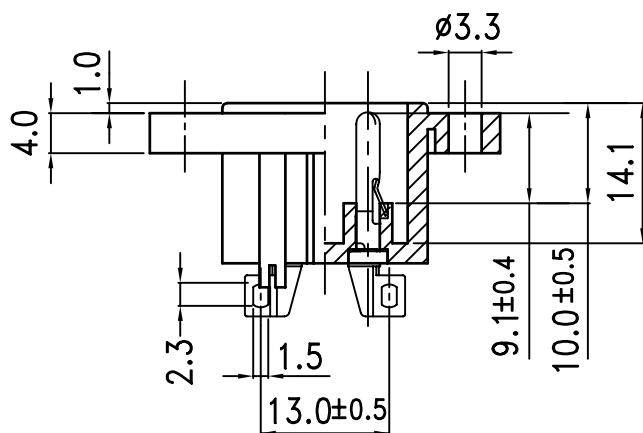
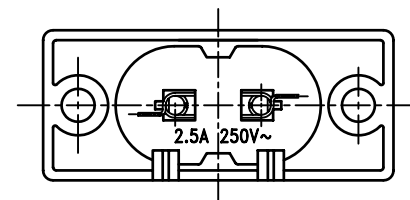

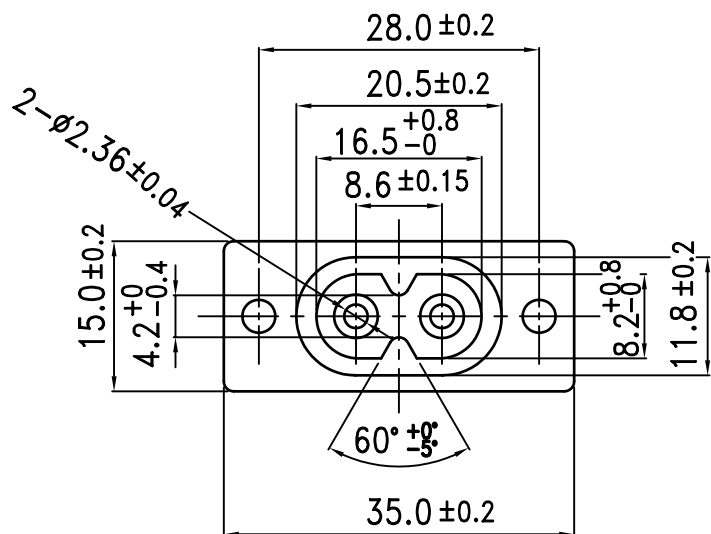


PANEL CUT-OUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Fiber Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V	
Mark	Safety Regulation
cULus	cULus
CCC	CCC
VDE	VDE
SEMKO	SEMKO
DEMKO	DEMKO
FIMKO	FIMKO
NEMKO	NEMKO


IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意: 此圖只供參考

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY

UNIT

mm

UNIT Q'TY

1

SCALE

1:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.

SWR-201A(B00)

REV

李
2006.9.05
小英

APPROVED BY

林
2006.9.05
達忠

ID NO

06082801Q

INTERIM NO.

DESCRIPTION

NEW NO.

B