

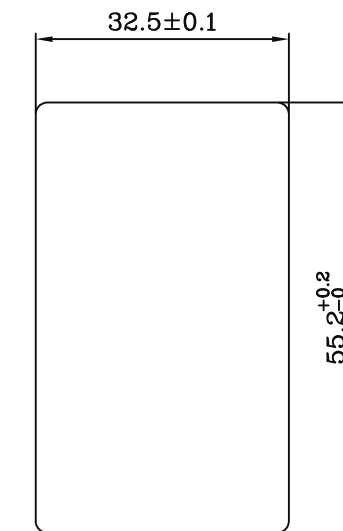
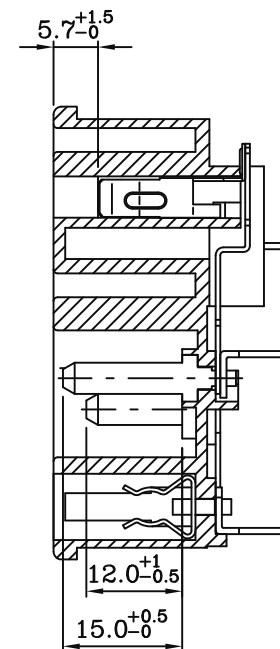
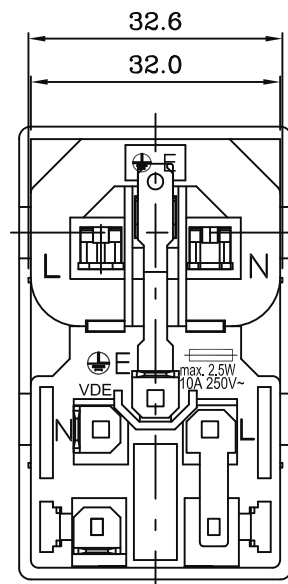


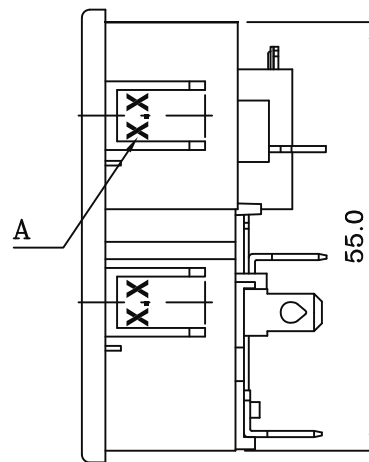

PANEL CUT-OUT

XX	A
10	1.0
12	1.2
15	1.5
17	1.7
20	2.0
25	2.5

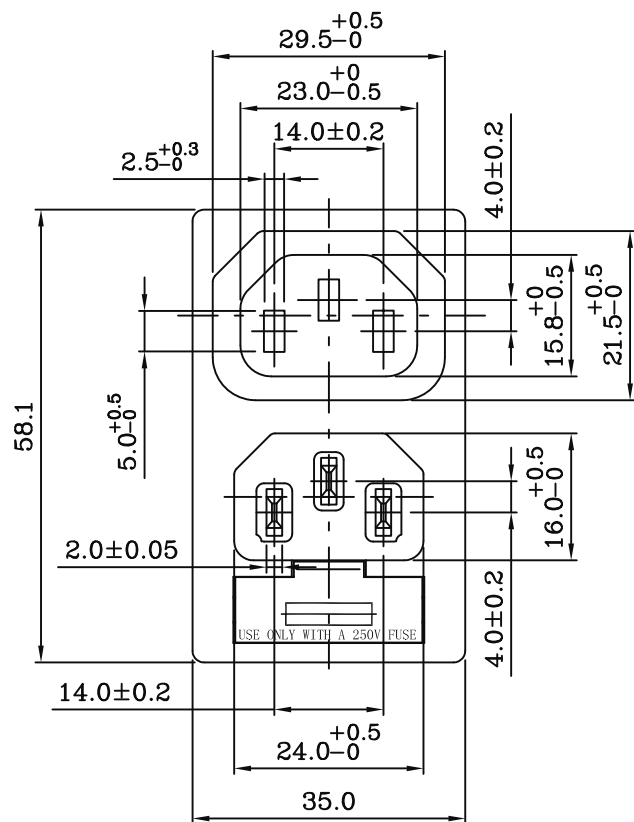

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.


Rating: AC 10A 250V	
Mark	Safety Regulation
	CCC
	VDE
	ENEC
Rating: AC 15A 250V	
Mark	Safety Regulation
	CULUS

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY



APPROVED BY



UNIT

mm

UNIT QTY

1

SCALE

1:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO

100331A16

DESCRIPTION

PRODUCT NO.

SWR-3014G21 (07) XX

INTERIM NO.

NEW NO.

REV

B