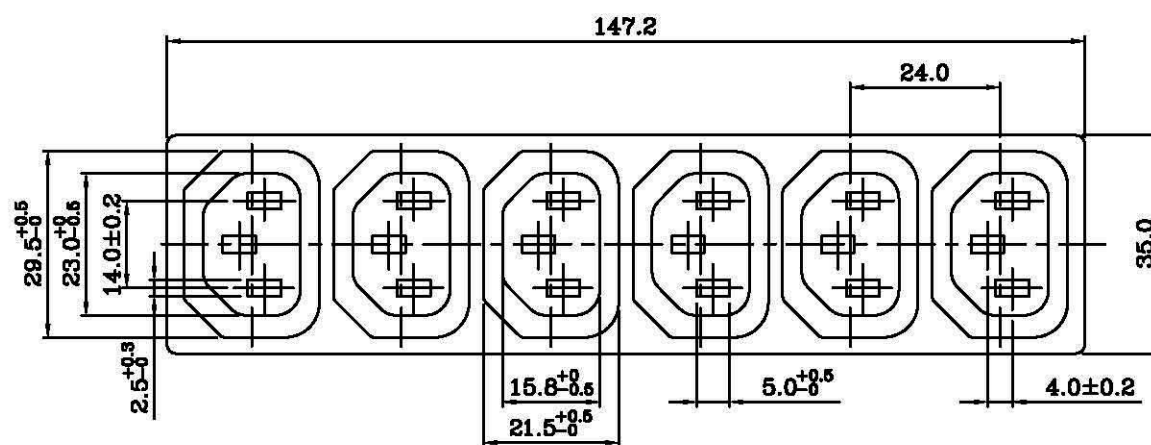
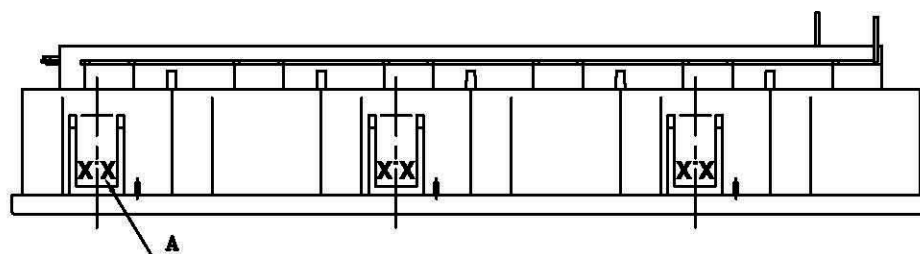
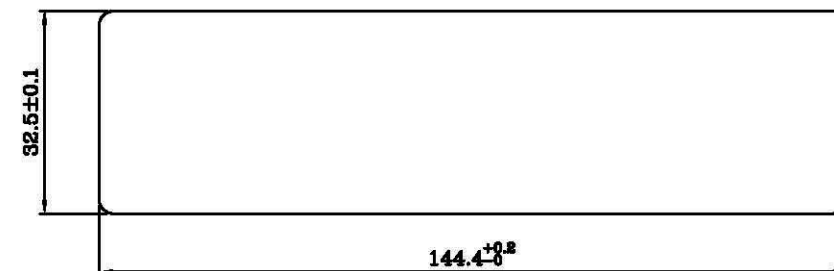
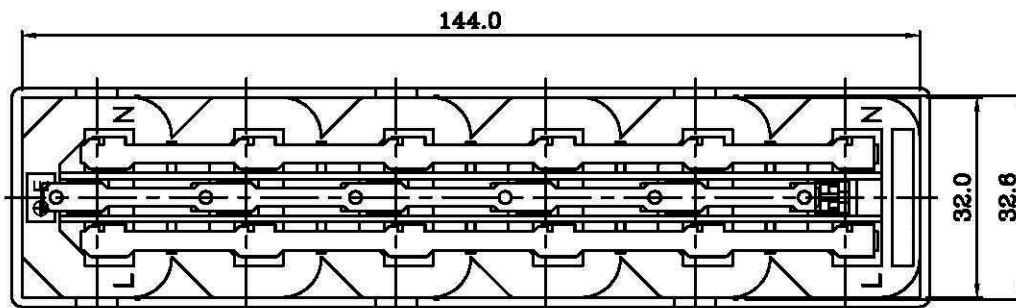


PANEL CUT-OUT

	XX	A
	10	1.0
	12	1.2
	15	1.5
	17	1.7
	20	2.0
	25	2.5

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. Withdrawing force: 10N~50N.


Rating: AC 10A 250V	
Mark	Safety Regulation
	VDE
	BNEC
	CCC
Rating: AC 15A 250V	
Mark	Safety Regulation
	CULUS

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net



DRAWN BY



UNIT
mm

UNIT QTY
1

SCALE
4:5

APPROVED BY



TOLERANCE
X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

ID NO

100421A06

DESCRIPTION

PRODUCT NO.

SWR-302G6(00)XX

INTERIM NO.

NEW NO.

REV

C