
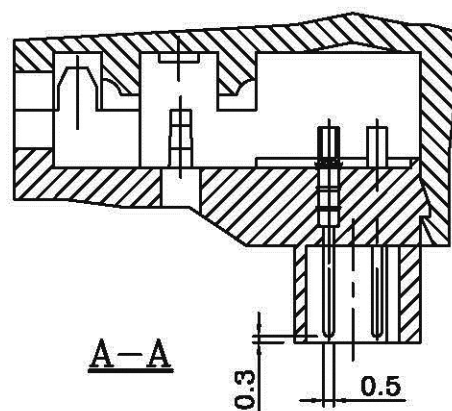
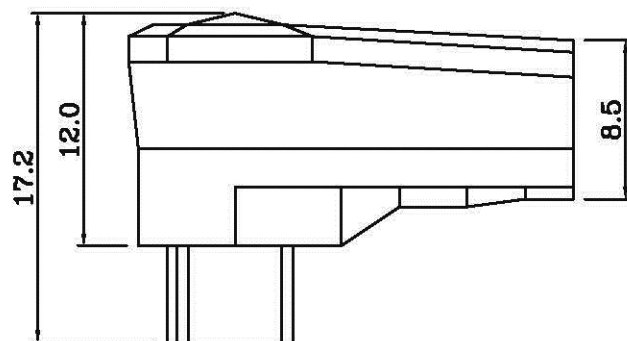
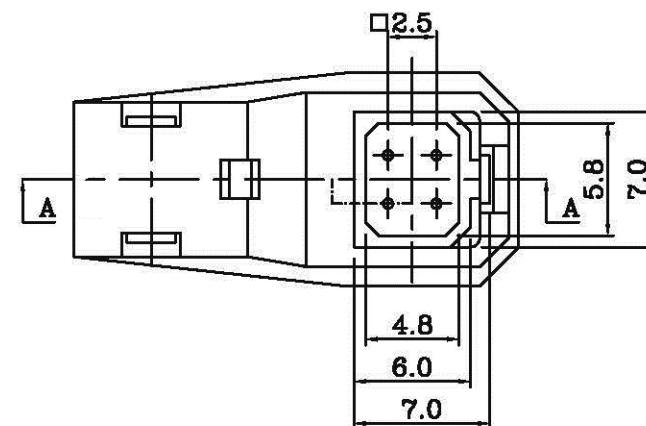
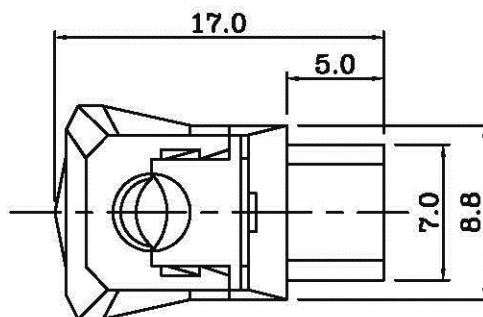


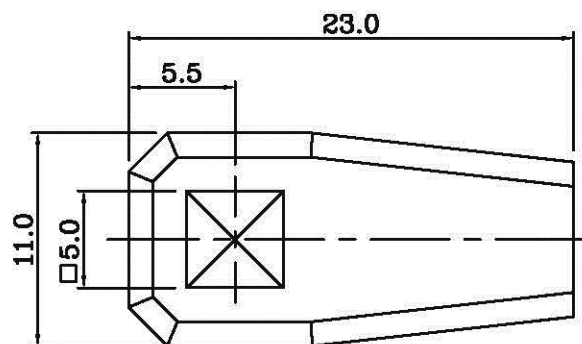

SPECIFICATION:

1. Rating: AC DC 30V 0.5A.
2. Contact Resistance: 20mΩ MAX.
3. Insulation Resistance: DC 100V 100MΩ MIN.
4. Dielectric Strength: AC 150V For 1 Minute
5. Synthesized Inserting Strength: 4.0kg MAX.
6. Synthesized Pulling Strength: 0.3~3.5kg.
7. Body Material: Nylon 94V-0~2.


IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意: 此圖只供參考

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY

UNIT

mm

UNIT QTY

1

SCALE

2:1

TOLERANCE

X.XX±0.1
XX.XX±0.2
XXX.XX±0.3

PRODUCT NO.

SW-001

REV

ID NO

06112005Q

INTERIM NO.

DESCRIPTION

NEW NO.

A

李

2006.11.21

小英

APPROVED BY

林

2006.11.21

達忠