


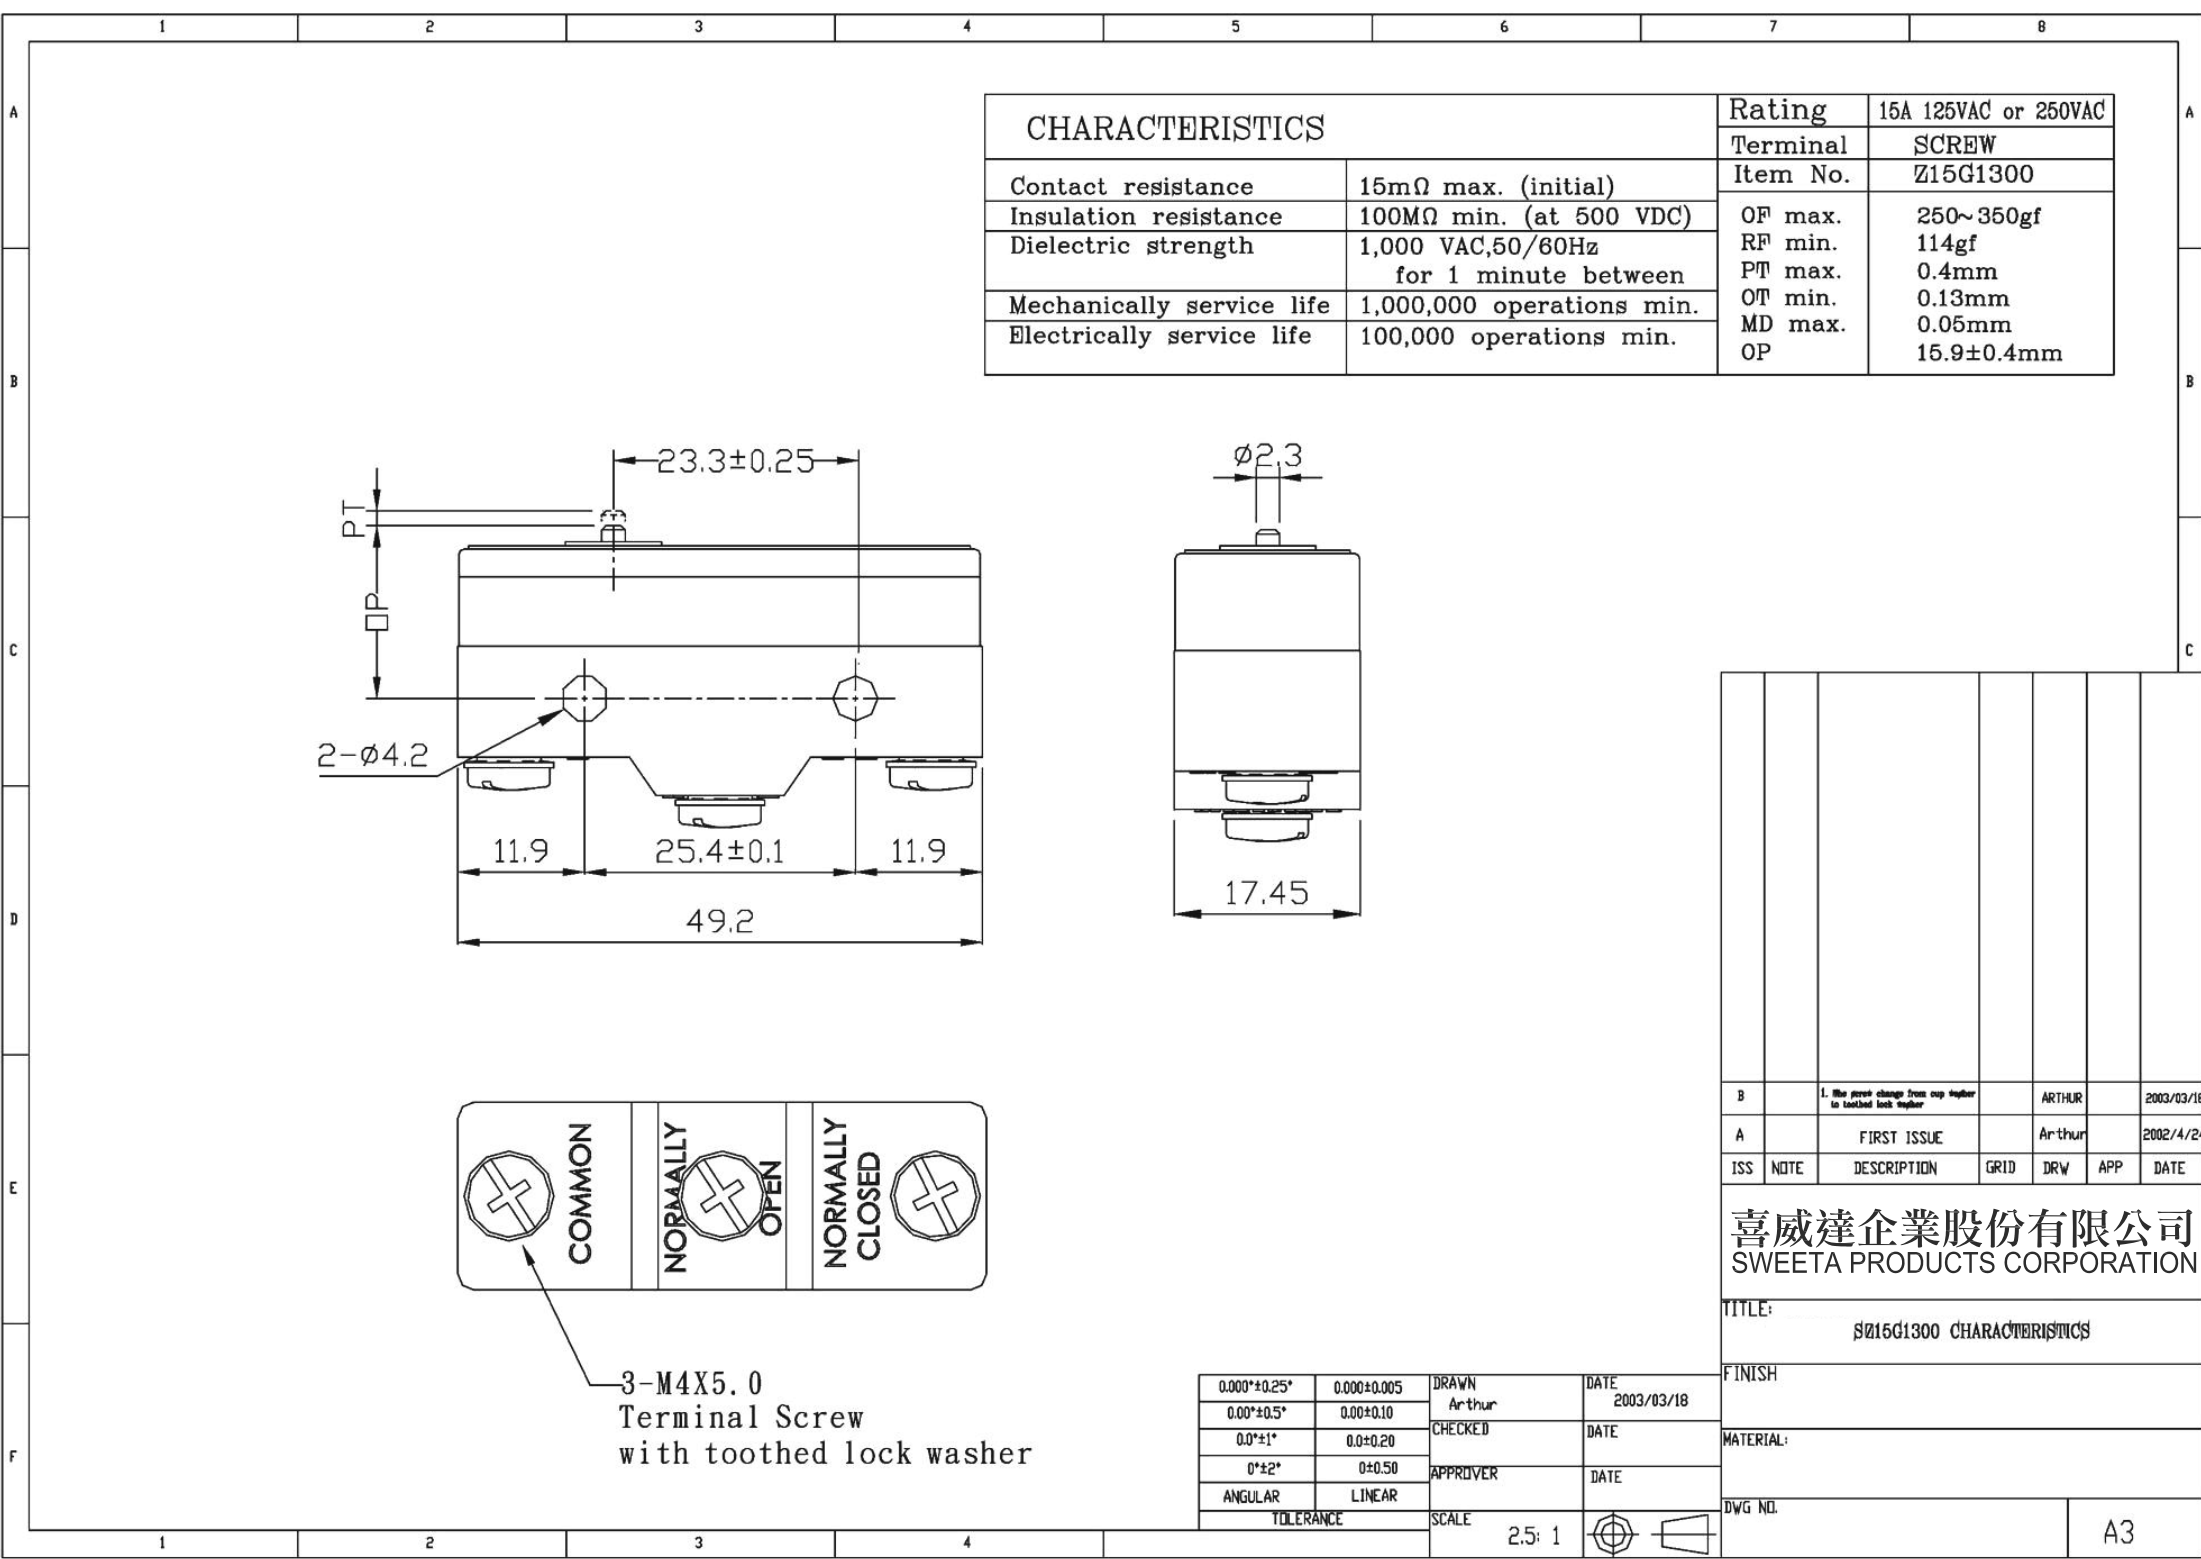

CHARACTERISTICS		Rating	15A 125VAC or 250VAC
Contact resistance	15mΩ max. (initial)	Terminal	SCREW
Insulation resistance	100MΩ min. (at 500 VDC)	Item No.	Z15G1300
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	OF max.	250~350gf
Mechanically service life	1,000,000 operations min.	RF min.	114gf
Electrically service life	100,000 operations min.	PT max.	0.4mm
		OT min.	0.13mm
		MD max.	0.05mm
		OP	15.9±0.4mm

B		1. The part change from cup type to toothed lock washer		ARTHUR		2003/03/18
A		FIRST ISSUE		Arthur		2002/4/24
ISS	NOTE	DESCRIPTION	GRID	DRW	APP	DATE
喜威達企業股份有限公司						
SWEETA PRODUCTS CORPORATION						
TITLE: S15G1300 CHARACTERISTICS						
FINISH						
MATERIAL:						
DWG NO.						
A3						

0.000*±0.25*	0.000±0.005	DRAWN	DATE
0.00*±0.5*	0.00±0.10	Arthur	2003/03/18
0.0*±1*	0.0±0.20	CHECKED	DATE
0*±2*	0±0.50	APPROVER	DATE
ANGULAR	LINEAR	SCALE	
TOLERANCE		2.5: 1	