
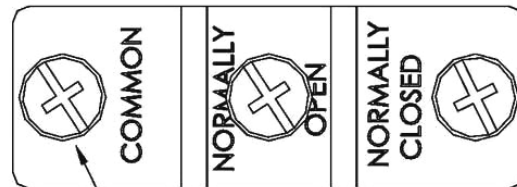
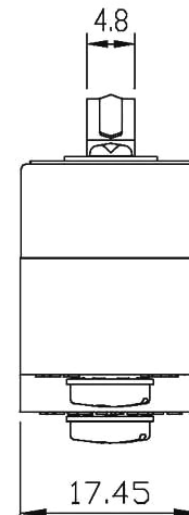


CHARACTERISTICS		Rating	15A 125VAC or 250VAC
		Terminal	SCREW
Contact resistance	15mΩ max. (initial)	Item No.	Z15G1301
Insulation resistance	100MΩ min. (at 500 VDC)	OF max.	141gf
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	RF min.	14gf
		PT max.	4mm
Mechanically service life	1,000,000 operations min.	OT min.	1.6mm
		MD max	1.3mm
Electrically service life	100,000 operations min.	FP max	20.6mm
		OP	17.4±0.8mm

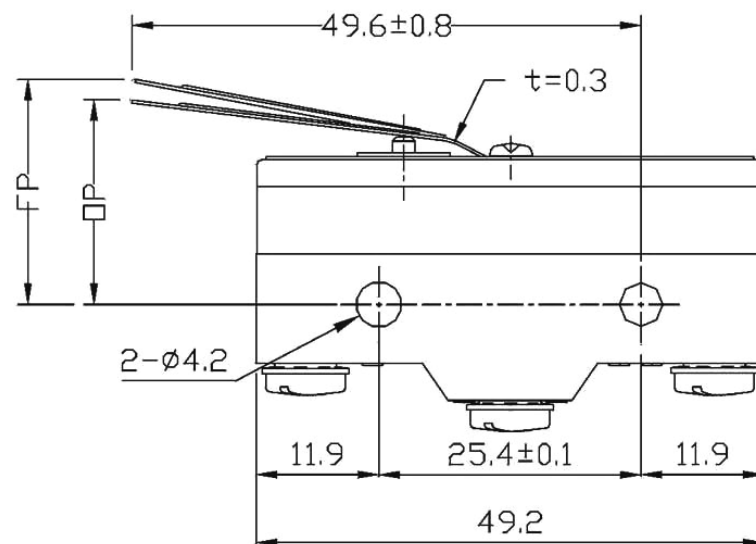

3-M4X5.0
Terminal Screw
with toothed lock washer

0.000 $\pm$ 0.25*	0.000 $\pm$ 0.005	DRAWN	DATE
0.00 $\pm$ 0.5*	0.00 $\pm$ 0.10	Arthur	2003/03/18
0.0 $\pm$ 1*	0.0 $\pm$ 0.20	CHECKED	DATE
0 $\pm$ 2*	0 $\pm$ 0.50	APPROVER	DATE
ANGULAR	LINEAR		
TOLERANCE		SCALE	
		2.5: 1	

B		1. The plate change from one together to toothed lock together		ARTHUR		2003/03/18
A		FIRST ISSUE		Arthur		2002/4/24
ISS	NOTE	DESCRIPTION	GRID	DRW	APP	DATE

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

TITLE: SZ15G1301 CHARACTERISTICS

FINISH

MATERIAL:

DWG NO.	
---------	--

A3