
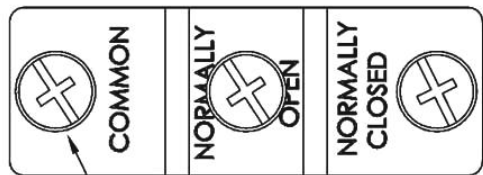
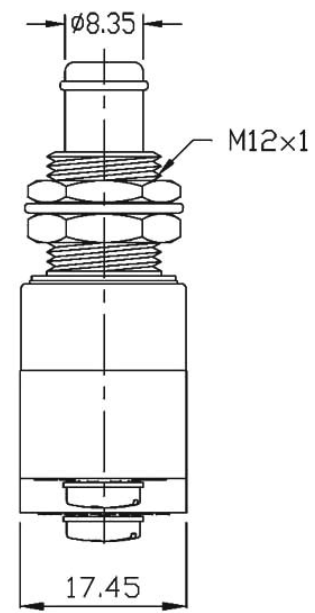


CHARACTERISTICS		Rating	15A 125VAC or 250VAC
		Terminal	SCREW
Contact resistance	15mΩ max. (initial)	Item No.	Z15G1307
Insulation resistance	100MΩ min. (at 500 VDC)	OF max.	250~350gf
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	RF min.	114gf
		PT max.	0.4mm
Mechanically service life	1,000,000 operations min.	OT min.	5.5mm
Electrically service life	100,000 operations min.	MD max.	0.05mm
		OP	21.8±0.8mm

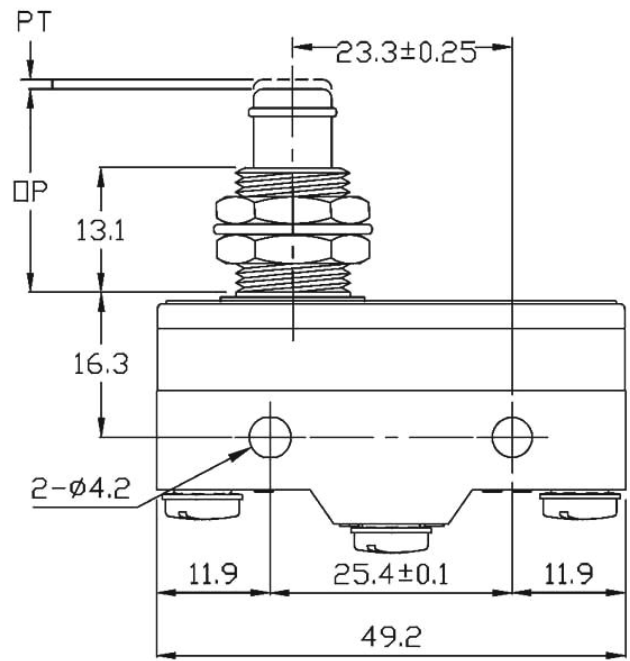

3-M4X5.0
Terminal Screw
with toothed lock washer

0.000*±0.25*	0.000±0.005	DRAWN	DATE
0.00*±0.5*	0.00±0.10	Arthur	2003/03/18
0.0*±1*	0.0±0.20	CHECKED	DATE
0*±2*	0±0.50	APPROVER	DATE
ANGULAR	LINEAR	SCALE	DATE
TOLERANCE		2.5: 1	

B		I. The screw change from cap screw to locked lock washer	ARTHUR		2003/03/18
A		FIRST ISSUE	Arthur		2002/4/24
ISS	NOTE	DESCRIPTION	GRID	DRW	APP
喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION					
TITLE: S015G1307 CHARACTERISTICS					
FINISH					
MATERIAL:					
DWG NO.				A3	