
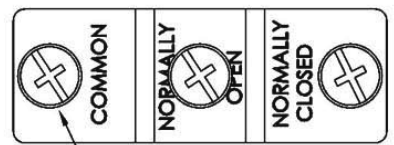
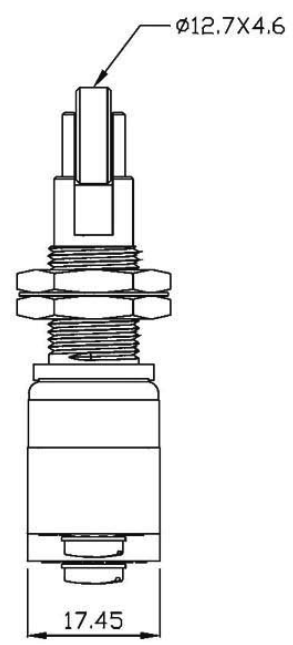


CHARACTERISTICS		Rating	15A 125VAC or 250VAC
		Terminal	SCREW
Contact resistance	15mΩ max. (initial)	Item No.	Z15G1308
Insulation resistance	100MΩ min. (at 500 VDC)	OF max.	250~350gf
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	RF min.	114gf
		PT max.	0.4mm
Mechanically service life	1,000,000 operations min.	OT min.	3.58mm
Electrically service life	100,000 operations min.	MD max.	0.05mm
		OP	33.4±1.2mm

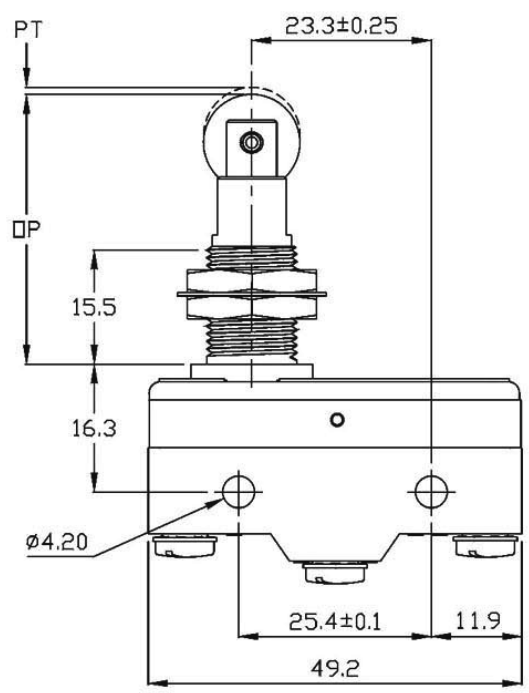

3-M4X5.0
Terminal Screw
with toothed lock washer

C		OP 33.4±1.2mm was 32.5±1mm		ARTHUR		2003/07/08
B		1. SMALL RIG SEAL 2. No force change from any member to locked lock member		ARTHUR		2003/03/18
A		FIRST ISSUE		Arthur		2002/4/24
ISS	NOTE	DESCRIPTION	GRID	DRW	APP	DATE

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

TITLE:		SZ15G1308 CHARACTERISTICS	
FINISH			
MATERIAL:			
DWG NO.		A3	

0.000°±0.25°	0.000±0.005	DRAWN	DATE
0.00°±0.5°	0.00±0.10	Arthur	2003/07/08
0.0°±1°	0.0±0.20	CHECKED	DATE
0°±2°	0±0.50	APPROVER	DATE
ANGULAR	LINEAR	SCALE	
TOLERANCE		2.5: 1	