
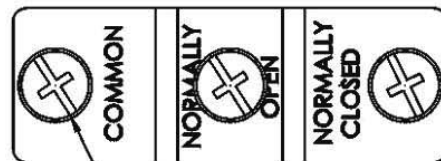
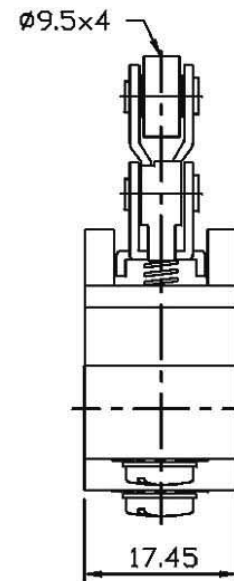


CHARACTERISTICS		Rating	15A 125VAC or 250VAC
		Terminal	SCREW
Contact resistance	15mΩ max. (initial)	Item No.	Z15G1744
Insulation resistance	100MΩ min. (at 500 VDC)	OF max.	170g
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	RF min.	42g
Mechanically service life	1,000,000 operations min.	PT max.	2.7mm
Electrically service life	100,000 operations min.	OT min.	2.4mm
		MD max.	0.61mm
		FP max.	43.6mm
		OP	41.3±0.8mm

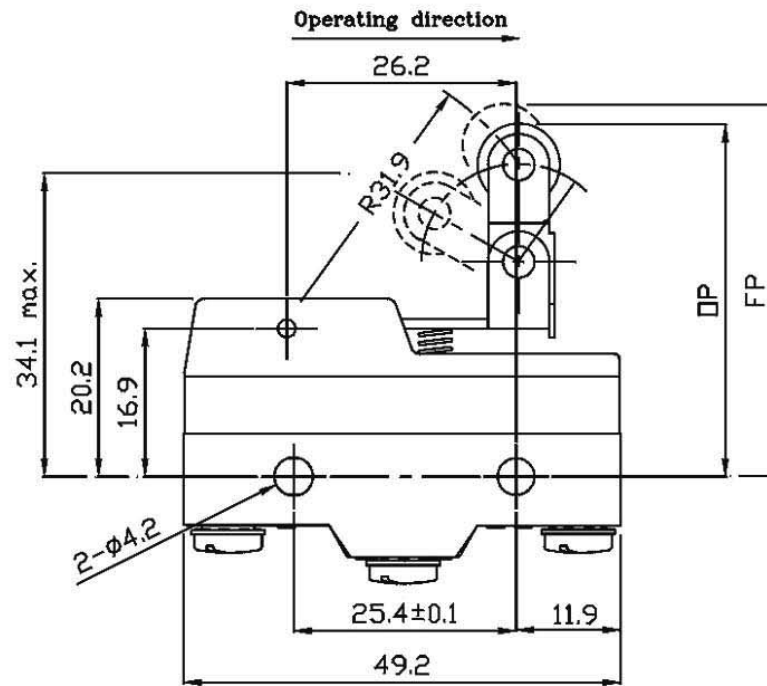

3-M4X5.0
Terminal Screw
with toothed lock washer

0.000±0.25°	0.000±0.005	DRAWN	DATE
0.00°±0.5°	0.00±0.10	ARTHUR	2003/03/18
0.0°±1°	0.0±0.20	CHECKED	DATE
0°±2°	0±0.50	APPROVER	DATE
ANGULAR	LINEAR	SCALE	
TOLERANCE		2.5 : 1	

B		1. The screw change from cup point to toothed lock washer		ARTHUR		2003/03/18
A		FIRST ISSUE		H.J.L		2000.04.29
ISS	NOTE	DESCRIPTION	GRID	DRY	APP	DATE
喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION						
TITLE: SZ15G1744 CHARACTERISTICS						
FINISH						
MATERIAL:						
DWG NO.						
						A3