


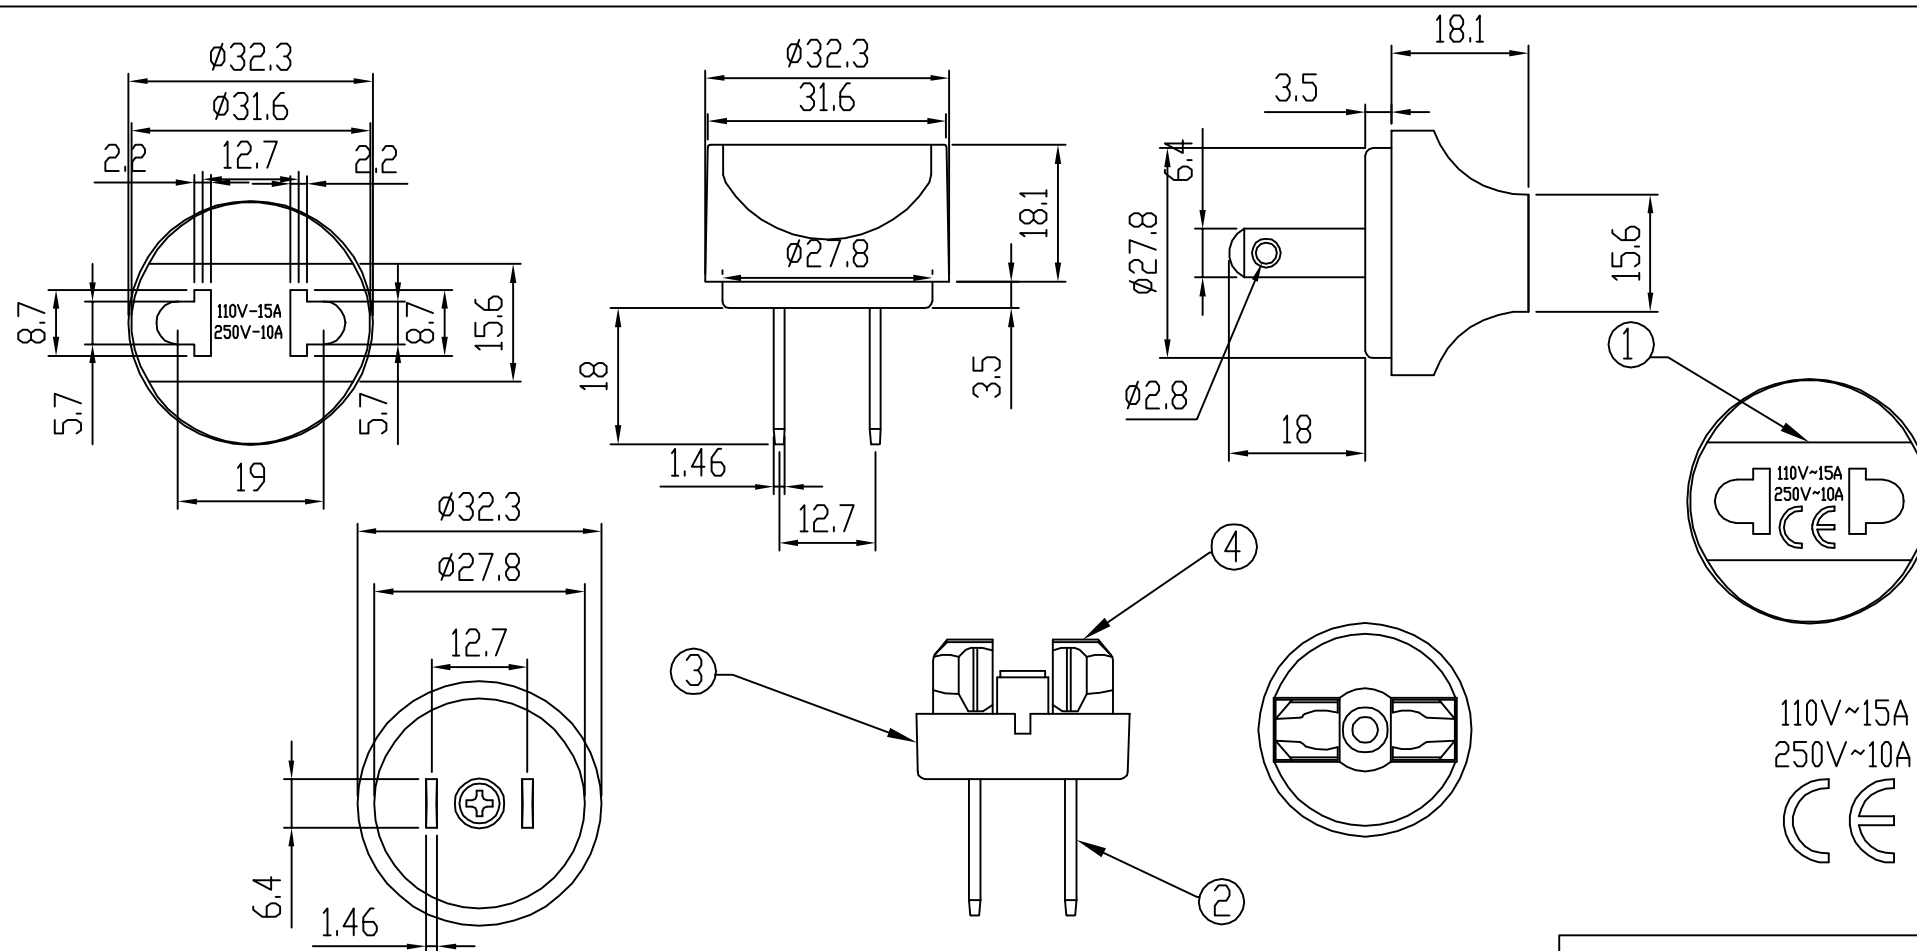

110V~15A
250V~10A
CE

NO	DESCRIPTION	MATERIAL	Q'TY
1	HOUSING	BAKELITE BLACK	1
2	PLUG	BRASS, NICKEL PLATED	2
3	HOUSING	BAKELITE BLACK	1
4	CONTACT	BRASS, NICKEL PLATED	2

SPECIFICATION
 CONTACT RATING: 10A 250V~AC
 INSULATION RESISTANCE: 500V DC for 1 min.
 Dielectric strength: 2000V a.c. for 1 min.
 Withstand voltage: AC 500V 60Hz 1 minute

TOLERANCES
0.5MM-5MM=±0.2MM
5MM-30MM=±0.4MM
30MM-120MM=±0.6MM
120MM-315MM=±1.0MM
315MM-1000MM=±1.6MM
1000MM-2000MM=±2.4MM

General Tolerance	繪圖 Draw By	設計 Designed By	比例尺 Scale	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION	SPB-102(WTN-01-1153) SOUTH AMERICA AC ADAPTOR 110V TO 220V 125V~ 10A BAKELITE	REF. NO.
	C.T WANG	C.T WANG	1:1			新模
版本 Version	核準 Approved By	核準日期 Date	單位 UNIT			
1	C.C HUANG	JUN 08 2009	m/m			