
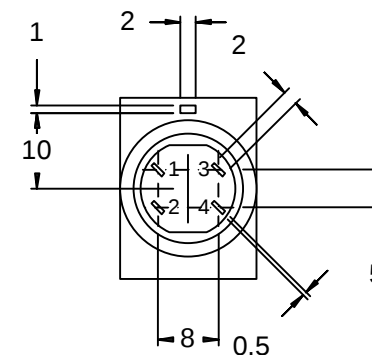
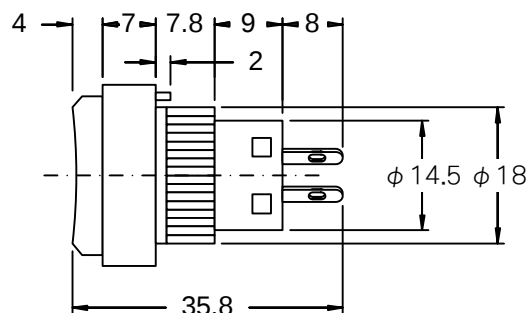



SWITCHING ACTION		
☐ L (self lock)	☐ N (non lock)	
CAP COLOR		
☐ G (green)	☐ R (red)	
☐ BL (blue)	☐ Y (yellow)	
LAMP VOLT		
☐ 6V		
☐ 12V		
☐ 24V		
☐ 110V		
☐ 220V		

General specifications

Circuit : PUSH ON
 Rating : A.C. 125V 3A
 Contact R.[max] : D.C. 5V 1A 30mΩ
 Insulation R.[min] : D.C. 500V 100MΩ
 Withstand VOL. : A.C. 500V 1minute
 Operating force : 250±50g
 Life cycle[max] : 40,000 CYCLES

Schematic

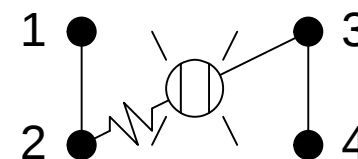

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION
 (TEL) : 886-2-22268001
 (FAX) : 886-2-22268002
 Website : www.sweeta.com.tw

比例 SCALE		品名 TITLE		PUSH BUTTON SWITCH	
單位 DIMENSION		mm		型號 MODEL	
DO NOT SCALE DRAWING		TOLERANCES UNLESS OTHERWISE		307	
UP TO 10		±0.3		繪圖 DRAWN	
ABOVE 10 TO 100		±0.5		核准 APPROVED	
ABOVE 100		±0.8		版次 REVISION	
ANGULAR DIMENSIONS		±5°		A	
				日期 DATE	
				2007/04/20	