

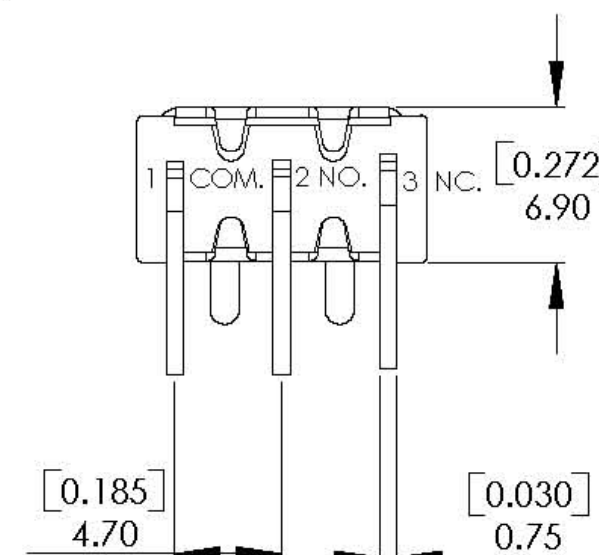
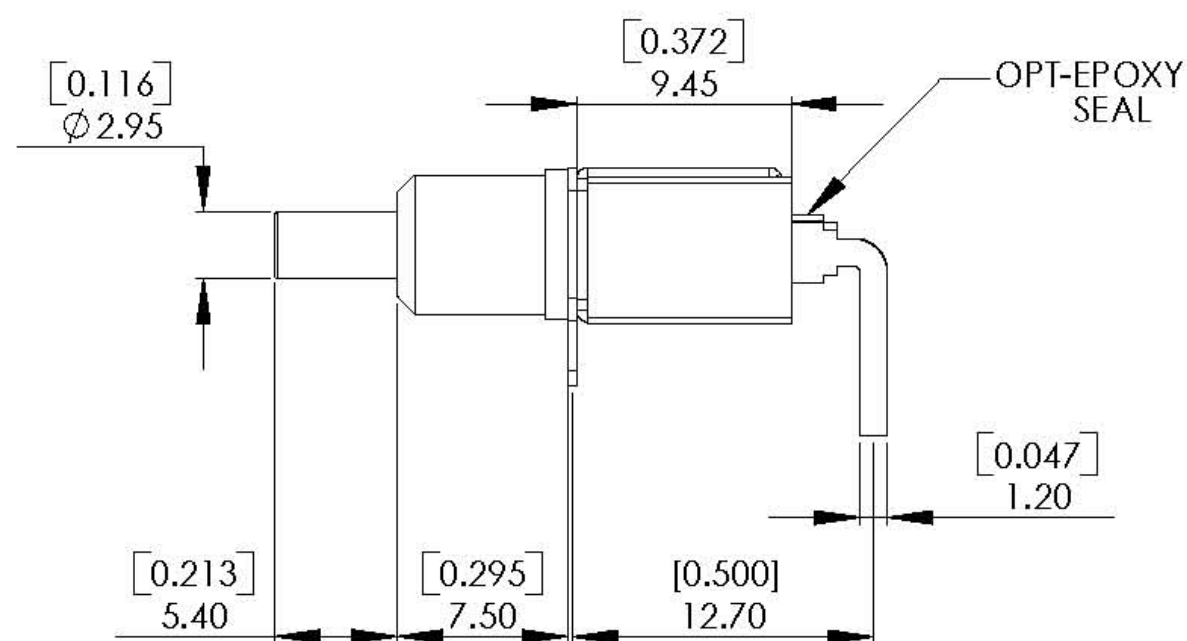


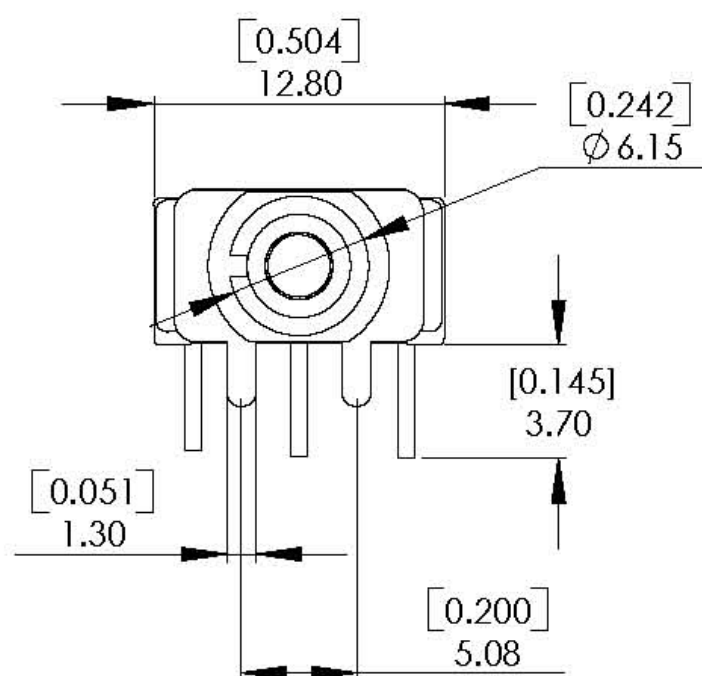

Model No: A3

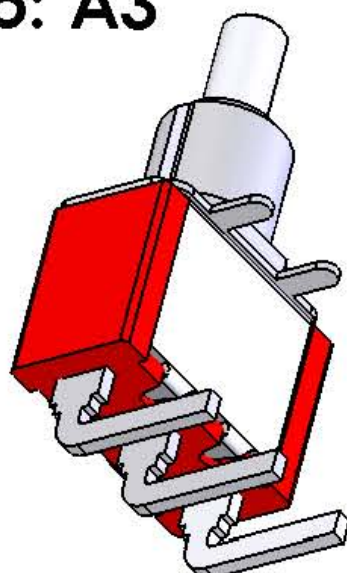

SPECIFICATIONS:

CONTACT RATING : 3 AMPS @ 120 V AC or 28 VDC.

1 APMS @250 V AC or 0.4VA AMPS @20 V AC or DC

ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.

CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 VDC.

100 mA, for both coin silver and gold plated contacts.

INSULATION RESISTANCE : 1,000 MΩ min.

DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.

OPERATING TEMPERATURE : -30 to 130

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).

PLUNGER : Nylon PA66 (11C-40)

BUSHING : ZINC ALLOY.


HOUSING : Stainless steel.

TERMINAL/CONTACT : Brass, with silver or gold plated.

or gold over silver

SWITCH SUPPORT : Brass, tin plated.

P.C. MOUNTING

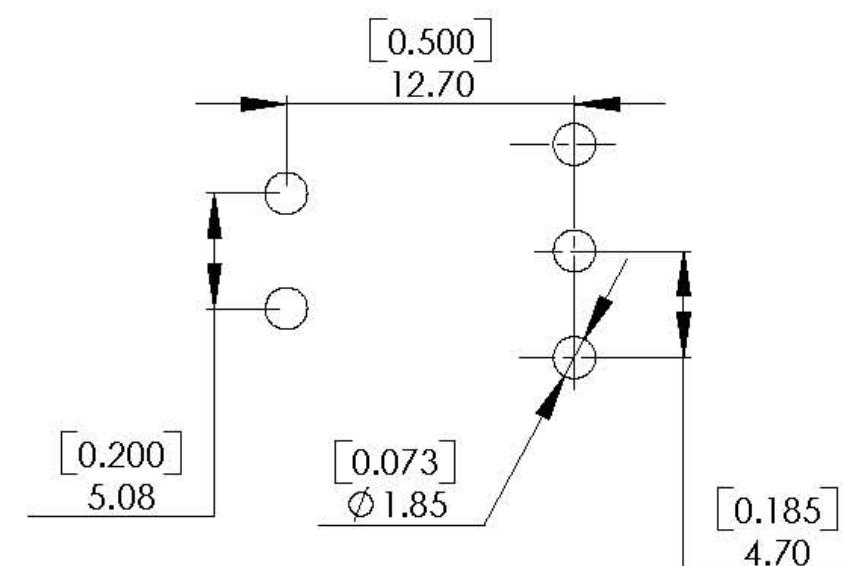

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 台北縣中和市中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net

ITEM NO	DATA	TOLERANCE
CHECKED BY	DRAWN BY	.XX ± 0.5
		X. ± 0.2
		.X ± 0.2
		.XX ± 0.05