

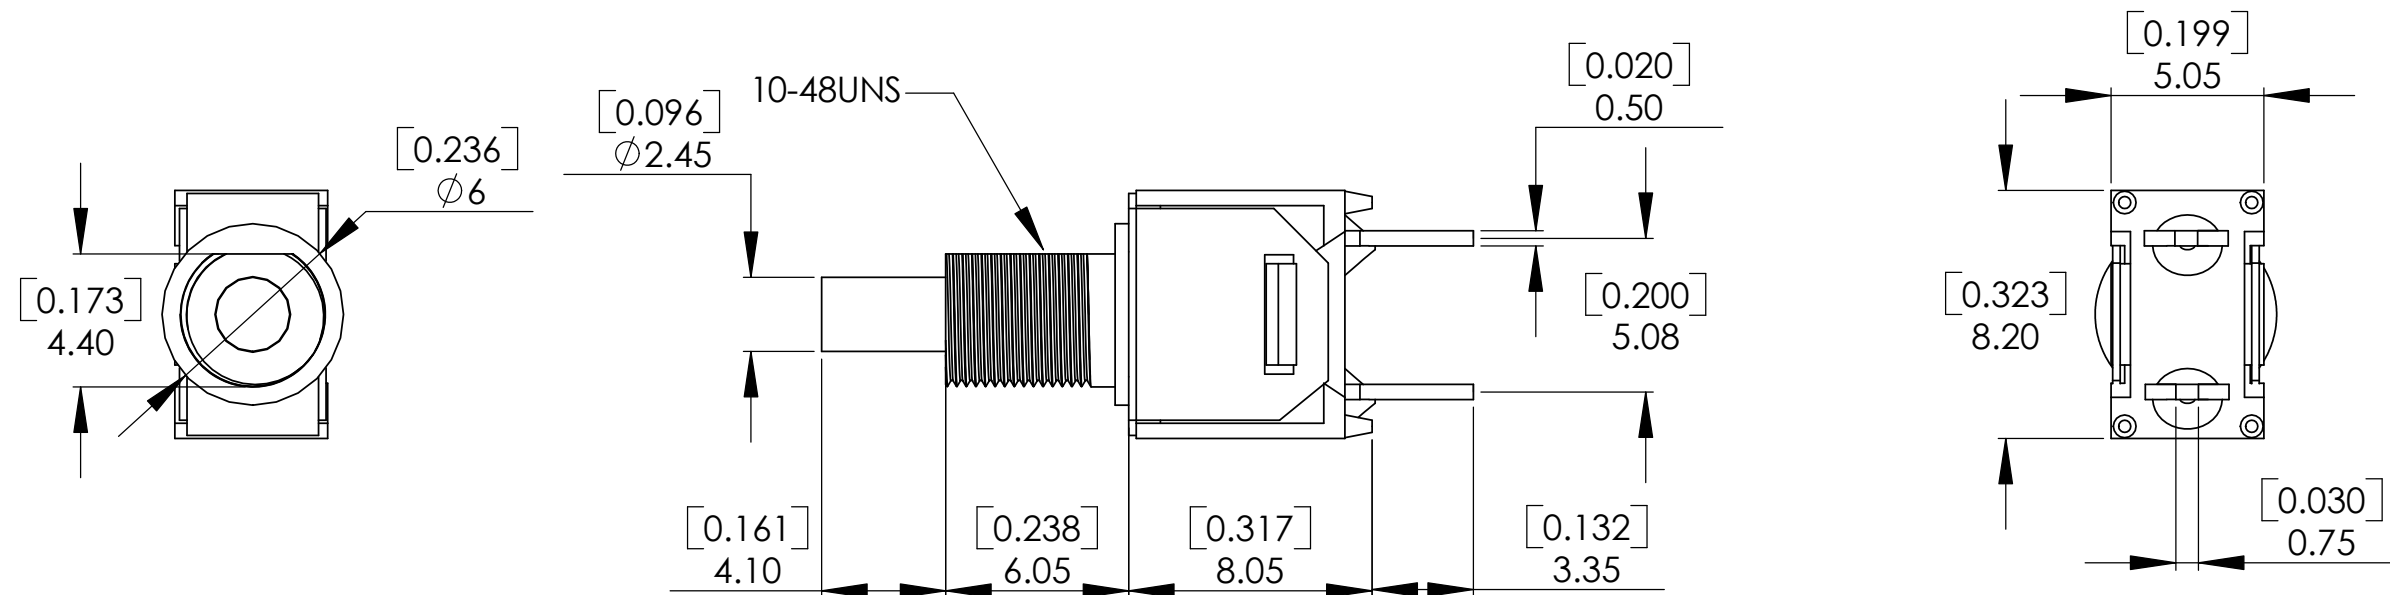


P.C.MOUNTING

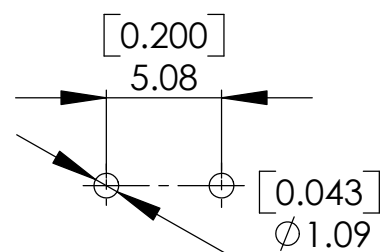

Schematic



Model No.	TYPE	
AS-01	OFF	MOM

SPECIFICATIONS:

CONTACT RATING : 1 AMPS @ 120 V AC or 28 V DC.
0.4VA AMPS @ 20V AC or DC
ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
CONTACT RESISTANCE : 20 mΩ max. initial @ 2-4 V DC.
100 mA, for both silver and gold plated contacts.
INSULATION RESISTANCE : 1,000 MΩ min.
DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
PLUNGER : Thermoplastic polyester-black .
BUSHING : Brass, nickel plated.
HOUSING : Stainless steel.
TERMINAL/CONTACT : Brass, with silver or gold plated.
or glod over silver.
SWITCH SUPPORT : Brass, tin plated.

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION 23552 新北市中和區中正路799號1樓 Tel : 02-2226-8001 Fax : 02-2226-8002 http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net				TOLERANCE
				XX. ± 0.5
				X. ± 0.2
ITEM NO		DATA		.X ± 0.2
CHECKED BY		DRAWN BY		.XX ± 0.2