

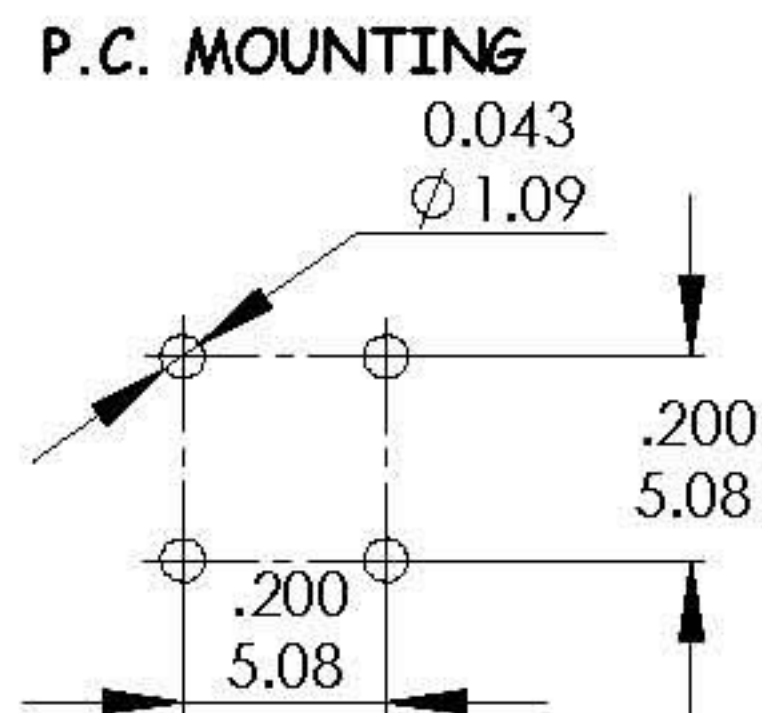
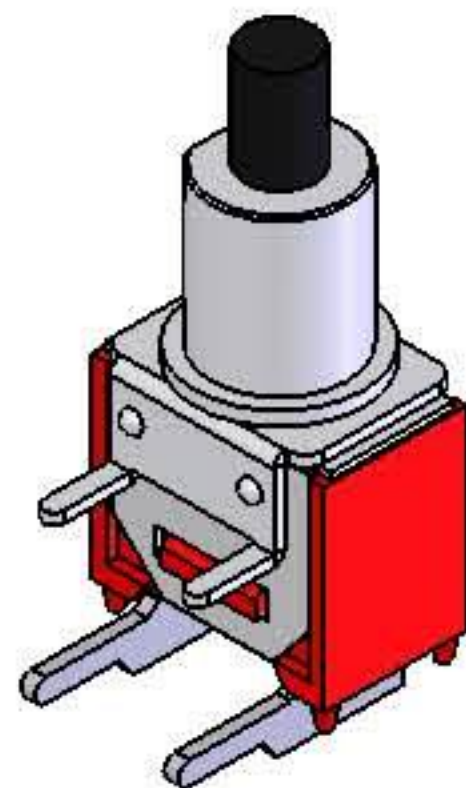
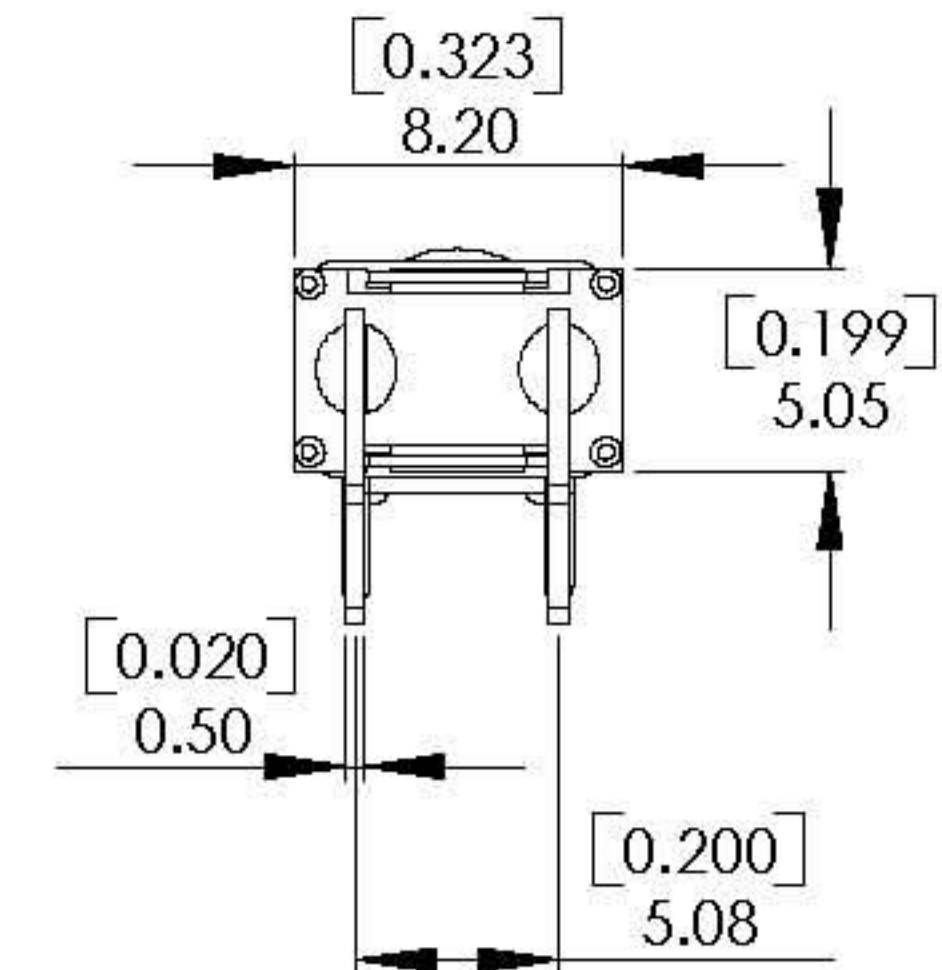
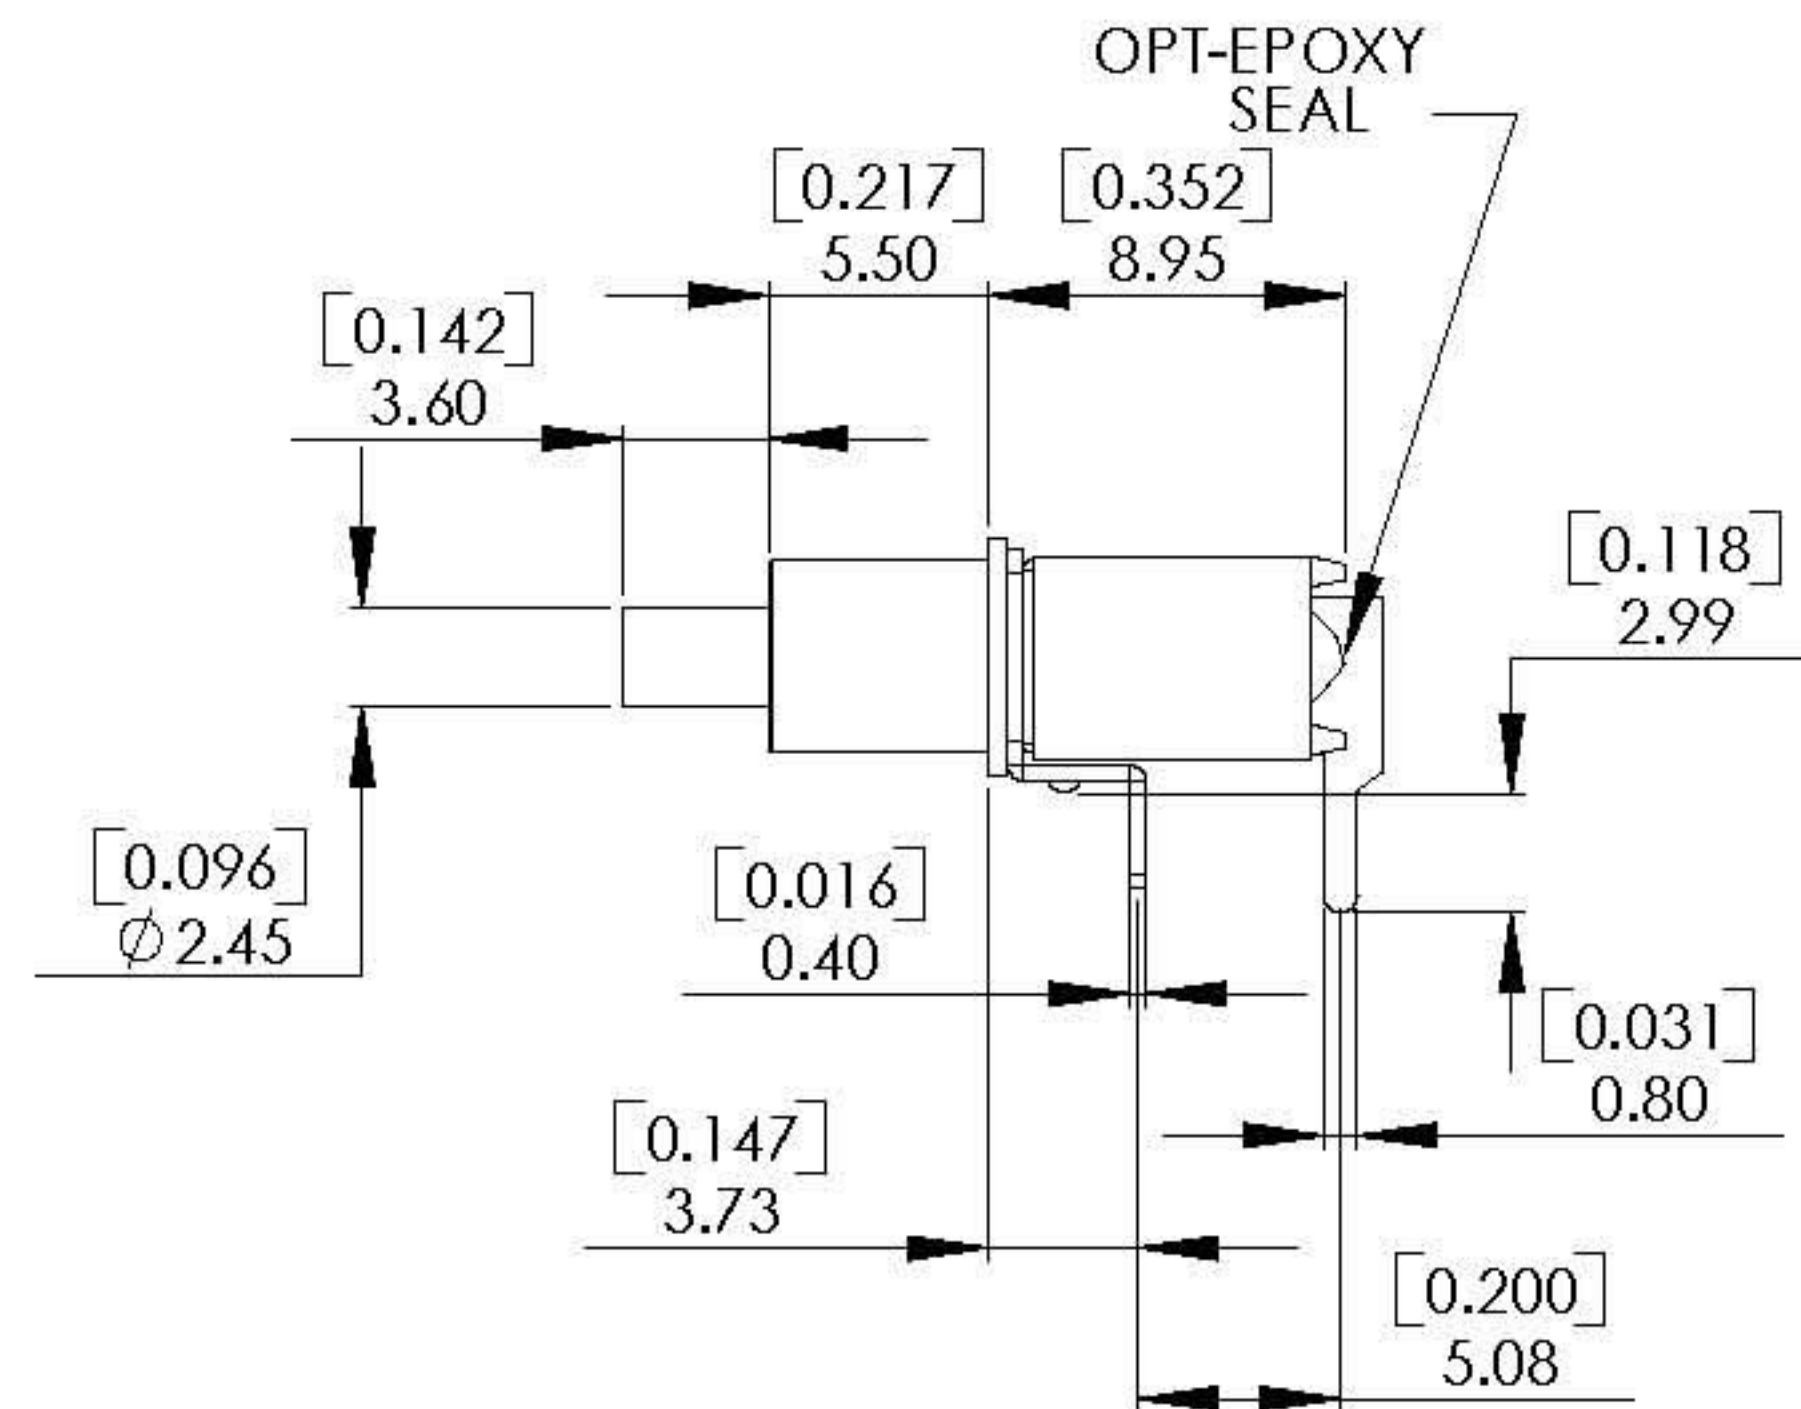


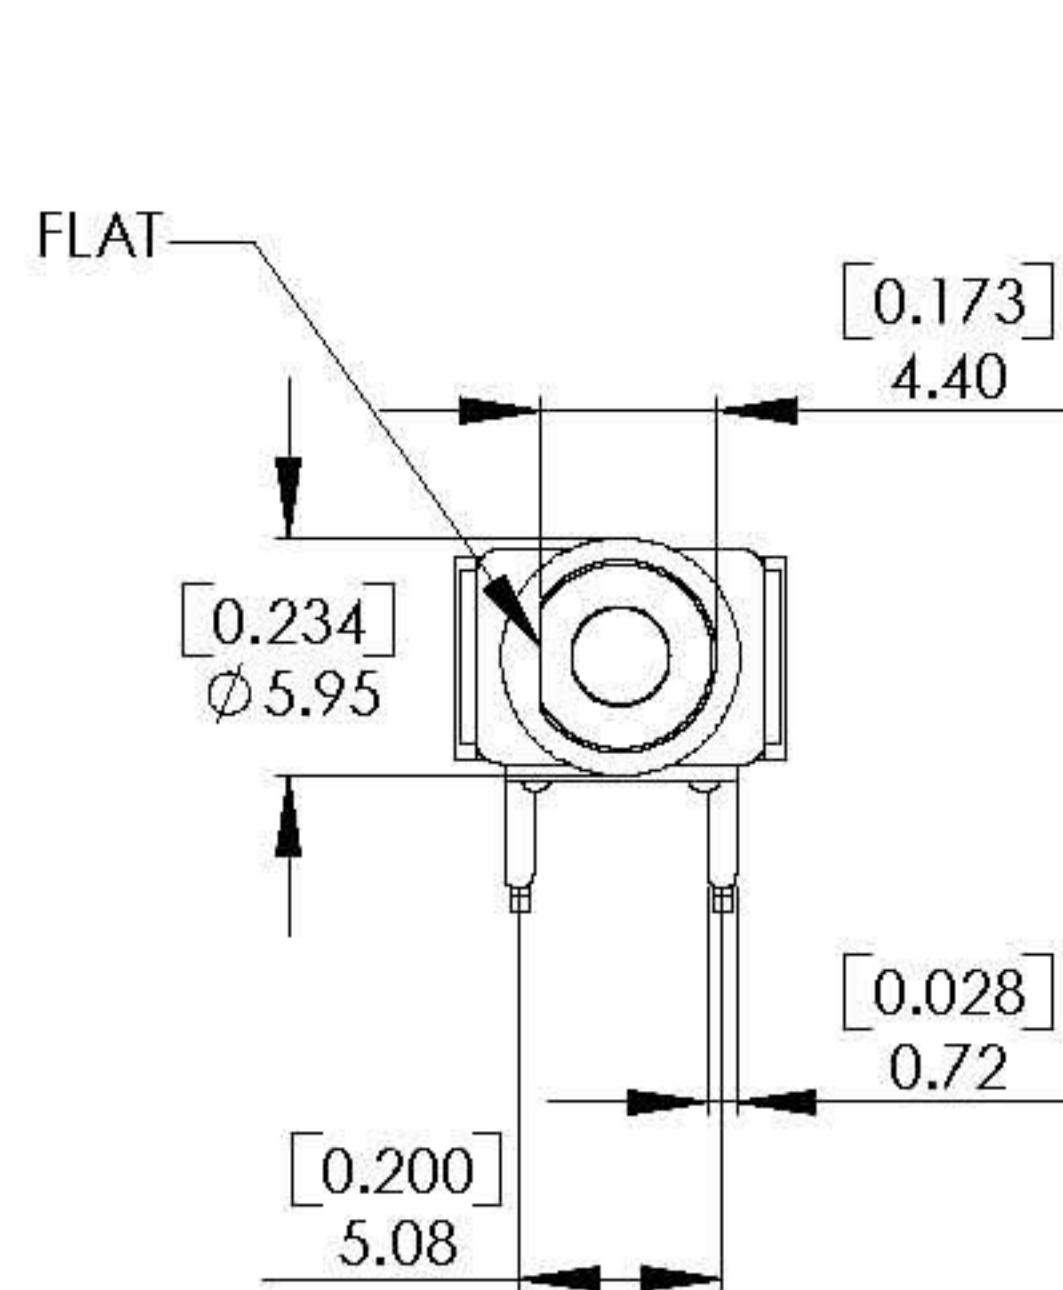

Schematic



Model No.	TYPE	
AS-02	OFF	MOM

SPECIFICATIONS:

CONTACT RATING : 1 AMPS @ 120 V AC or 28 V DC.
 0.4 AMPS @ 20V AC or DC
 ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 20 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 PLUNGER : Thermoplastic polyester-black .
 BUSHING : Brass, nickel plated.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or glod over silver.
 SWITCH SUPPORT : Brass, tin plated.

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION Tel: 886-2-2226-8001(Rep.) Fax: 886-2-2226-8002 E-mail: sweeta.tw@msa.hinet.net				TOLERANCE
				XX, ± 0.5
				X, ± 0.2
ITEM NO		DATA		X, ± 0.2
CHECKED BY		DRAWN BY		.XX ± 0.05