


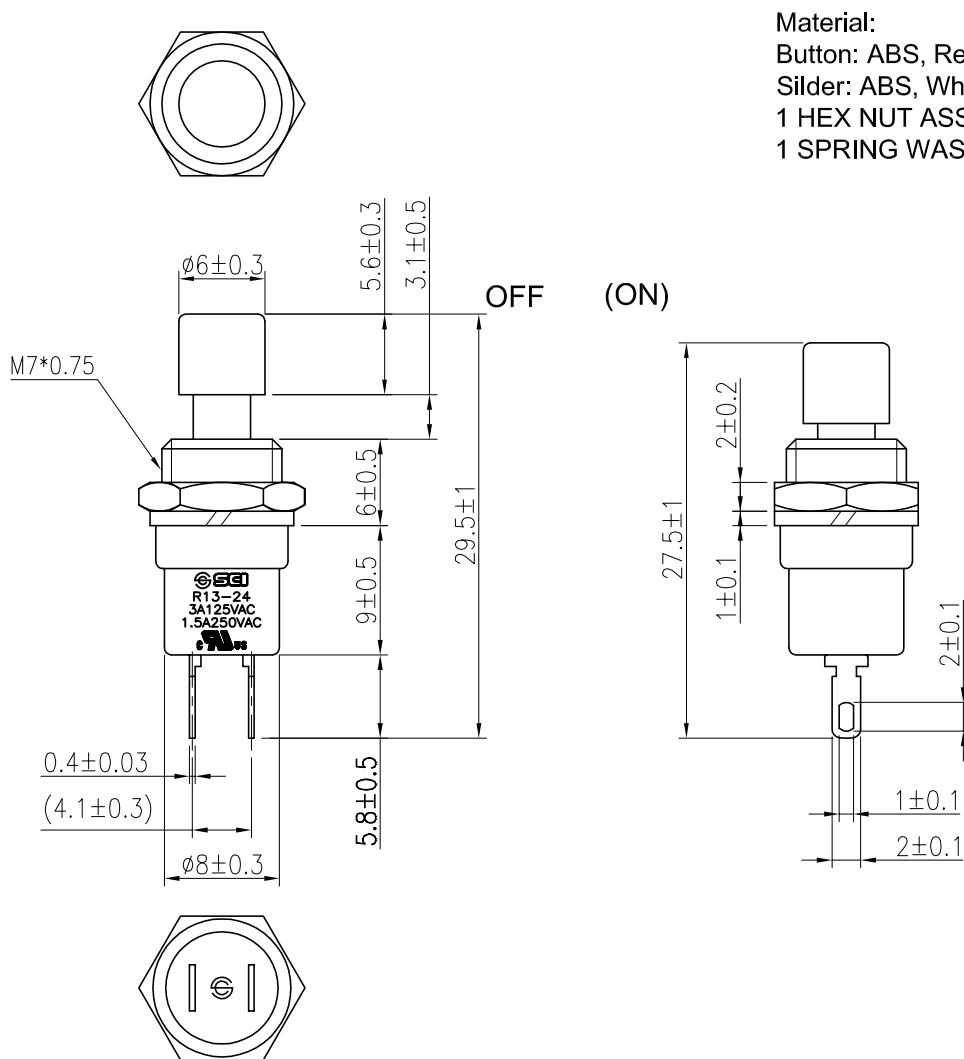


Rating	3A 125V AC 1.5A 250V AC		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1000V 1 minute			
Switch Function	2P SPST OFF-(ON)			
Button	ø6x5.6			



C8\R13-24\R13-24A-05-WH(1830031)

07/02/'12	柳新強	增加SCI LOGO				△	
09/20/'07	曹盈芳	UL安規通過3A 150V AC,1.5A 250V AC,追加印刷				△	
Date	Name	Description				No.	
Drawn	Checked	Approved	SCI BOM No	1830031	Model Name	PUSH SWITCH	
柳新強	徐州迎	楊金江	Customer No	103-1012-EVX	Model No.	SPR13-24A-05-WH	Rev.
07/02/'12	07/17/'12	07/18/'12	Unit	mm	SWEETA PRODUCTS CORPORATION		2