

Order number: SPS2110971-1P-1C


Specification

- 1.Rating:50V AC /28V DC Max
- 2.Switching current:100mA Max
- 3.Continuous current:500mA Max
- 4.Contact resistance:100m ohms Max(initial)
- 5.Insulation resistance:1000M ohms Min
- 6.Dielectric strength:500VAC 1 minute
- 8.Operating temperature:-20°C~+65°C
- 9.Ambient humidity:75%RH Max
- 10.Mechanical life:200,000 steps Min
- 11.Electrical life:100,000 steps Min

Material

- 1.Housing Pushkey Wheel:Thermoplastic
- 2.Moving contact:Phosphor bronze
- 3.Printed circuit boards:Copper-plated Au over Ni

Dimensions

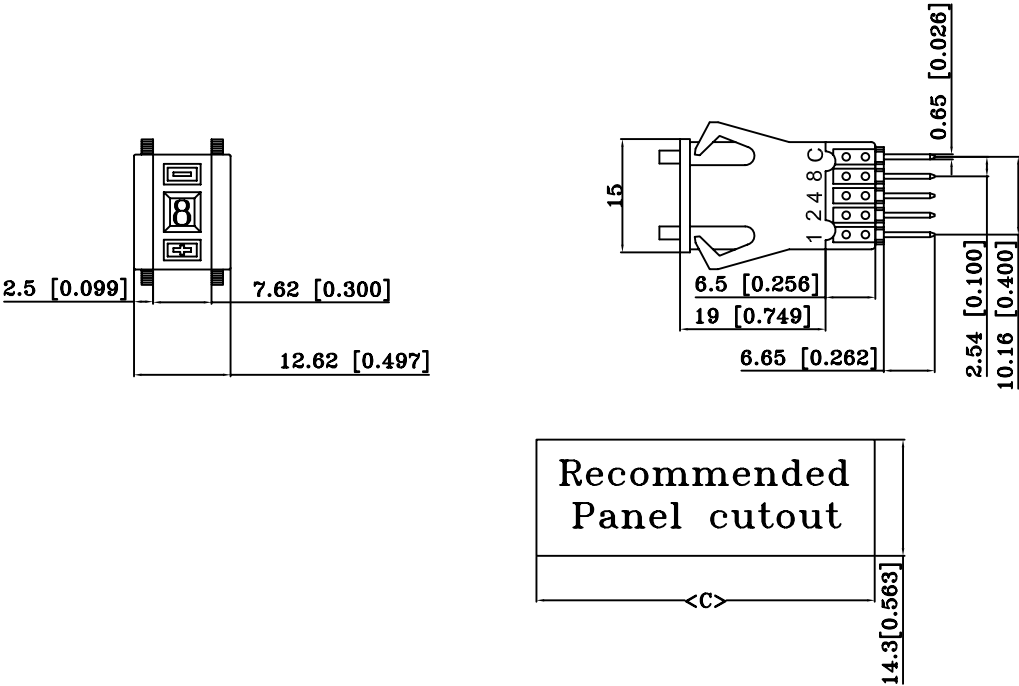

$$A=(7.62XN)+3$$
$$B=(7.62XN)+5$$
$$C=(7.62XN)+3.3$$

N=Number of Sections

*Please do not scan the drawing.

Code:09(10 position)

Wheel	C contacted terminal				
	1	2	4	8	C
0					•
1	•				•
2		•			•
3	•	•			•
4			•		•
5	•		•		•
6		•	•		•
7	•	•	•		•
8				•	•
9	•			•	•