
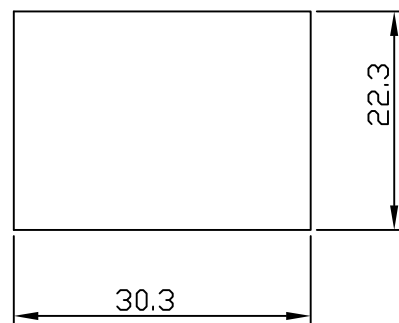
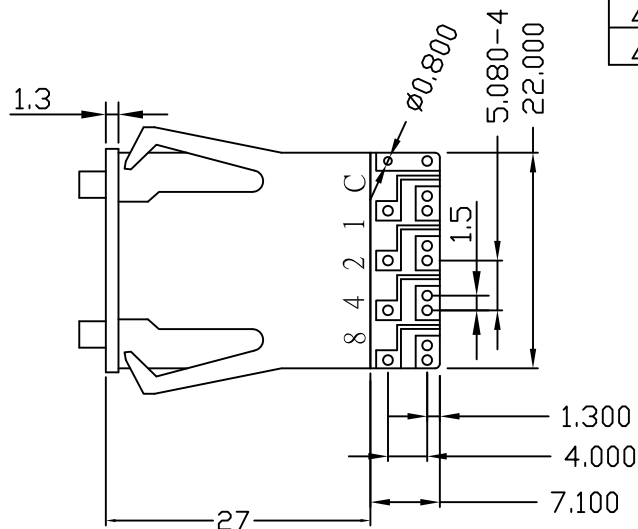
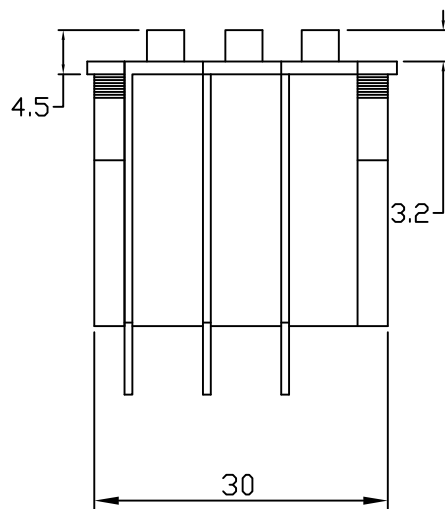


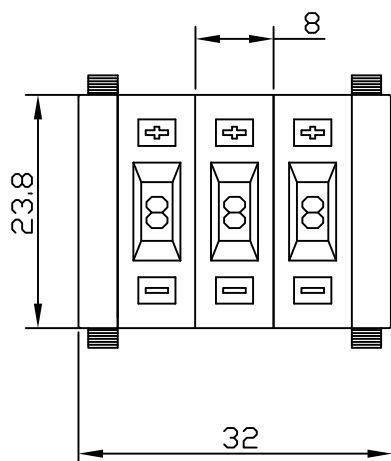

Recommended
Panel cutout

SPECIFICATION

1. Rating : 50 Vac / 28Vdc Max
2. Contact resistance : 200m ohm(initial)
3. Operating life: 100,000 steps min
4. RoHS compliant

E	F		G	
LTR	DESCRIPTION		DATE	APPL'
△				
△				
△				

SPS3210991-3P1C	
Parts	Color
Housing	Black
Wheel	Black
Push Key	Black
Character	White

WHEEL	C connected to terminals				
	1	2	4	8	C
0					●
1	●				●
2		●			●
3	●	●			●
4			●		●
5	●		●		●
6		●	●		●
7	●	●	●		●
8				●	●
9	●			●	●
Repeat					

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION				
TOLERANCES		DESCRIPTION:		
ANGULAR	LINEAR	Pushwheel Switch		
0°±2'	0±0.5	PART NO: SPS3210991-3P1C		
0.0°±1'	0.0±0.2			
0.00°±0.5'	0.00±0.05	DRAWN	CHECK	APPROVAL
0.000°±0.25'	0.000±0.005	Jase 2014/12/05	Jerry	
INNER NO	04-P-02-03-B	SHEET:	VER: A	UNIT: mm

DWG NO	SPS3210991-3P1C	0.000°±0.25'	0.000±0.005	Jase 2014/12/05	Jerry	
INNER NO	04-P-02-03-B	SHEET:	VER: A	UNIT: mm		