






- 1、All dimensions in mm〔Inch〕
- 2、General tolerance : $>10\pm0.4$
 $<10\pm0.25$
- 3、Electrical rating : 3A 250VAC & 3A 125VAC
- 4、Contact resistance : $<20\text{m}\Omega$ (initial)
- 5、Insulation resistance : $>1000\text{M}\Omega$ (500VDC between open contacts)
- 6、Dielectric strength : $>1500\text{V}$ 1 minute
- 7、Mechanical life : >30000 cycles
- 8、Electrical life : >10000 cycles
- 9、Temperature rise at the terminal : Max.30℃
- 10、Solder ability of terminal : Max350℃,3S(no pressure may
be placed in the terminals when soldering by hand)
- 11、Any Cd Pb Hg etc and it's compounds is not include in this product
- 12、Ambient temperature : 10T85/55
- 13、Ambient humidity : Max.85%
- 14、Degree of protection : IP20
- 15、Applicability for appliance of class : class II
- 16、Proof tracking resistance index(PTI) : 175
- 17、Degree of pollution : normal



CIRCUIT SPST

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
SPST	1-1a	—	OFF

PANEL OUT-CUT		
Z	Y	X
0.7~1.25〔.028~.049〕	9.1~9.2〔.358~.362〕	13.6~13.8〔.535~.543〕
1.25~2.0〔.049~.079〕	9.1~9.2〔.358~.362〕	13.8~14.0〔.543~.551〕
2.0~3.0〔.079~.118〕	9.1~9.2〔.358~.362〕	14.0~14.1〔.551~.555〕

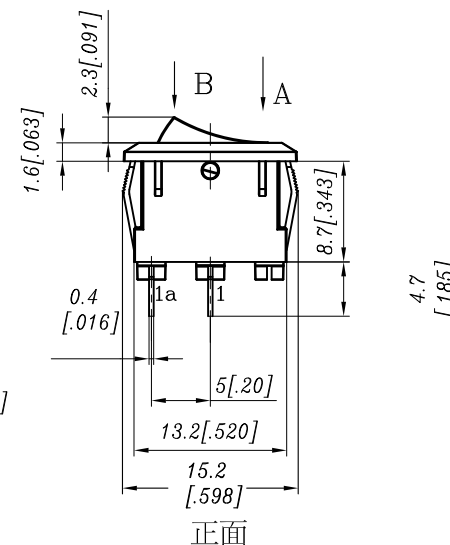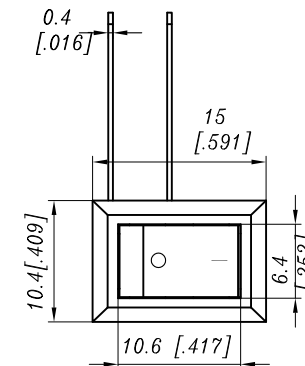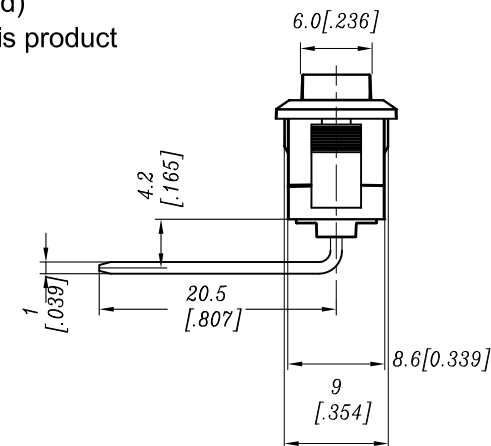

Color	Housing	Actuare
K(Black)	*	*
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		

A	B	C	D	E	F	G	H	I
					*			

Part No.	SMRA1KKFR0BL	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION						
Dwg. NO.	MRA1-90206							
Series NO.	MRA	Drawing	lizhili		Auditing	Zengliuhua		
Dwg Name	Specification	Scale	2:1	Date	02/05/09	Page		

* We keep the right to alter the dimension without notice.