







- 1、All dimensions in mm [ Inch ]
- 2、General tolerance : >10±0.4<10±0.25
- 3、Electrical rating : 3A 250VAC &3A 125VAC
- 4、Contact resistance : 20mΩ(initial)
- 5、Insulation resistance : 1000MΩ(500DC between open contacts)
- 6、Dielectric strength : >1500V 1 mintute
- 7、Mechanical life : >30000 cycles
- 8、Electrical life : >10000 cycles
- 9、Temperature rise at the terminal : Max.30℃
- 10、Solder ability of terminal : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)
- 11、Any Cd Pb Hg etc and it's compounds is not include in this product



CIRCUIT SPST

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
SPST	1-1a	—	OFF

PANEL OUT-CUT		
Z	Y	X
0.7~1.25 [ .028~.049 ]	9.1~9.2 [ .358~.362 ]	13.6~13.8 [ .535~.543 ]
1.25~2.0 [ .049~.079 ]	9.1~9.2 [ .358~.362 ]	13.8~14.0 [ .543~.551 ]
2.0~3.0 [ .079~.118 ]	9.1~9.2 [ .358~.362 ]	14.0~14.1 [ .551~.555 ]

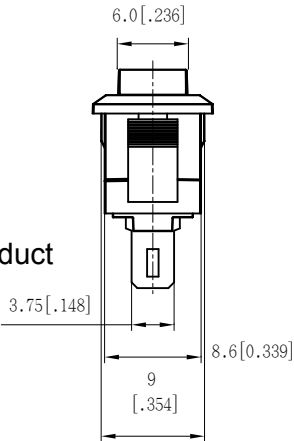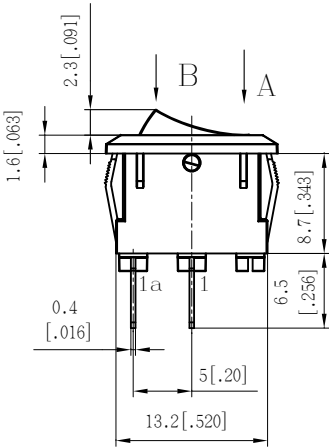

Color	Housing	Actuare
K(Black)	✓	✓
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		

A	B	C	D	E	F	G	H	I
					✓			

Part No.	SMRA1KKFT0B	喜威達企業股份有限公司						
Dwg. NO.	MRA1-61128	SWEETA PRODUCTS CORPORATION						
Series NO.	MRA	Drawing	lizhili		Auditing	wangchangjian		
Dwg Name	Specification	Scale	2:1	Date	11/28/06	Page		

\* We keep the right to alter the dimension without notice.