




Rating	25A 12V DC		Circuit Diagram Switch ON(1+2), Green LED Lighten 
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C ~ 85°C		
Switch Function	4P SPST ON-OFF (2*LED)		



***MATERIAL:**

Frame: Black, Nylon 66 (94V-2).






Actuator: White diffused, PC
with Black painting

LED1: Switch ON(1+2), Green LED Lighten

LED2: Switch ON(2+3), Blue LED Lighten

Printed: Laser engrave (45)

Switch ON(2+3), Blue LED Lighten

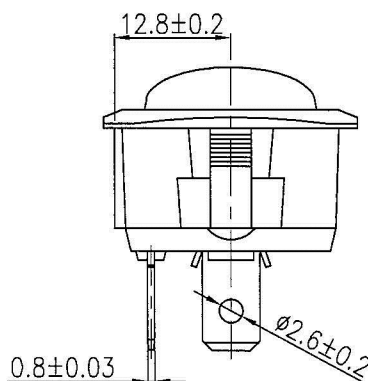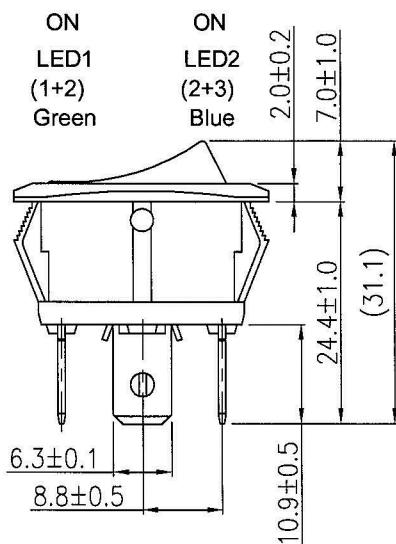

Tolerances ± 0.3 Unless Otherwise Specified

Date	Name	Description	No.	
Drawn	Checked	Approved	SCI BOM No.	1826462
曹盈芳			Customer No.	
02/16/17			Unit	mm
SWEETA PRODUCTS CORPORATION				Rev. X1