
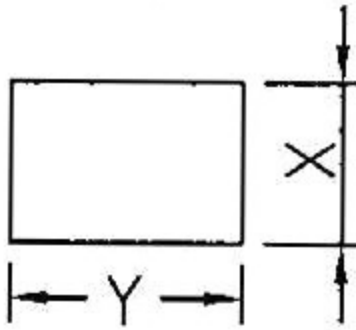
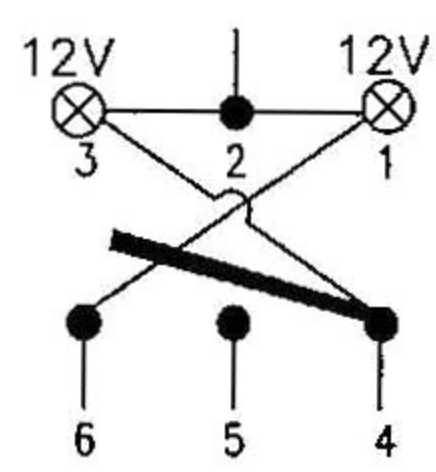
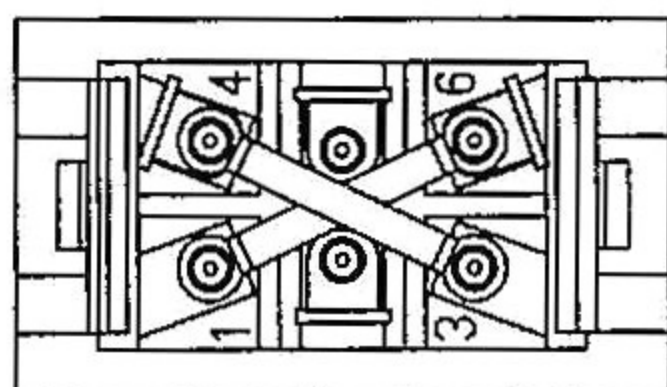
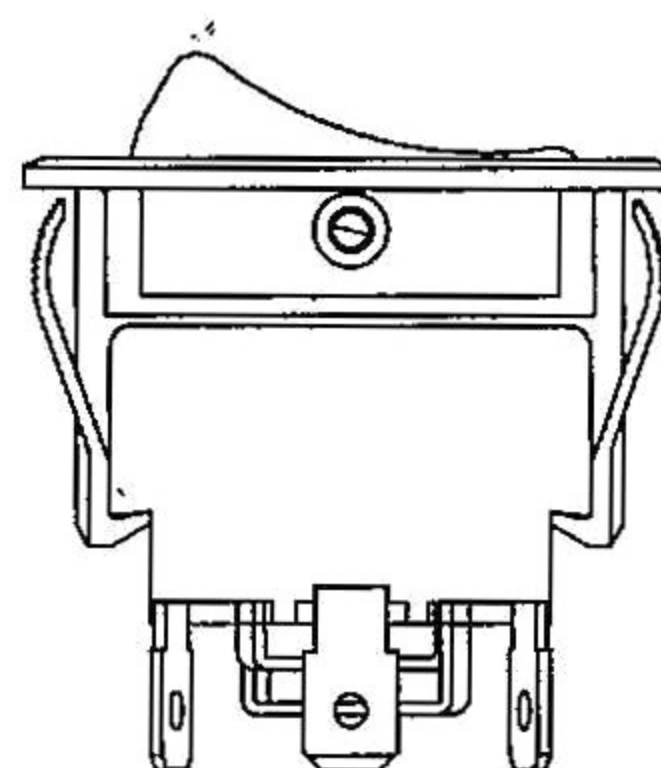
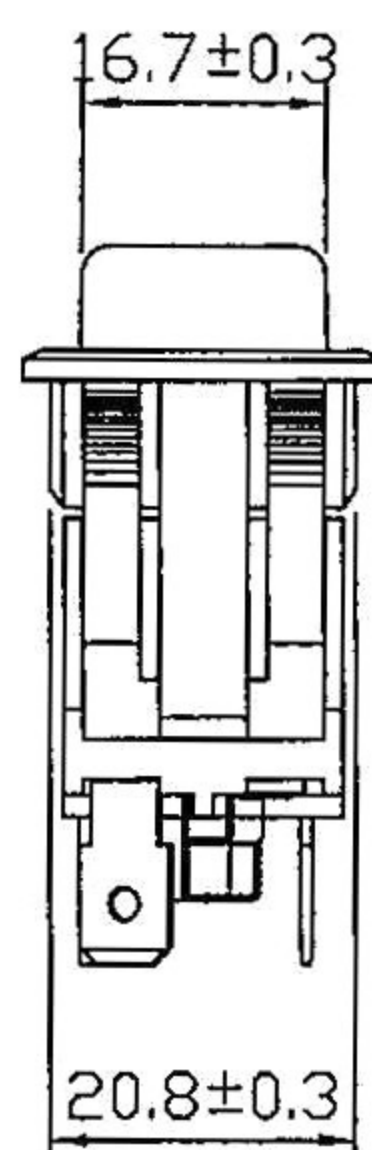
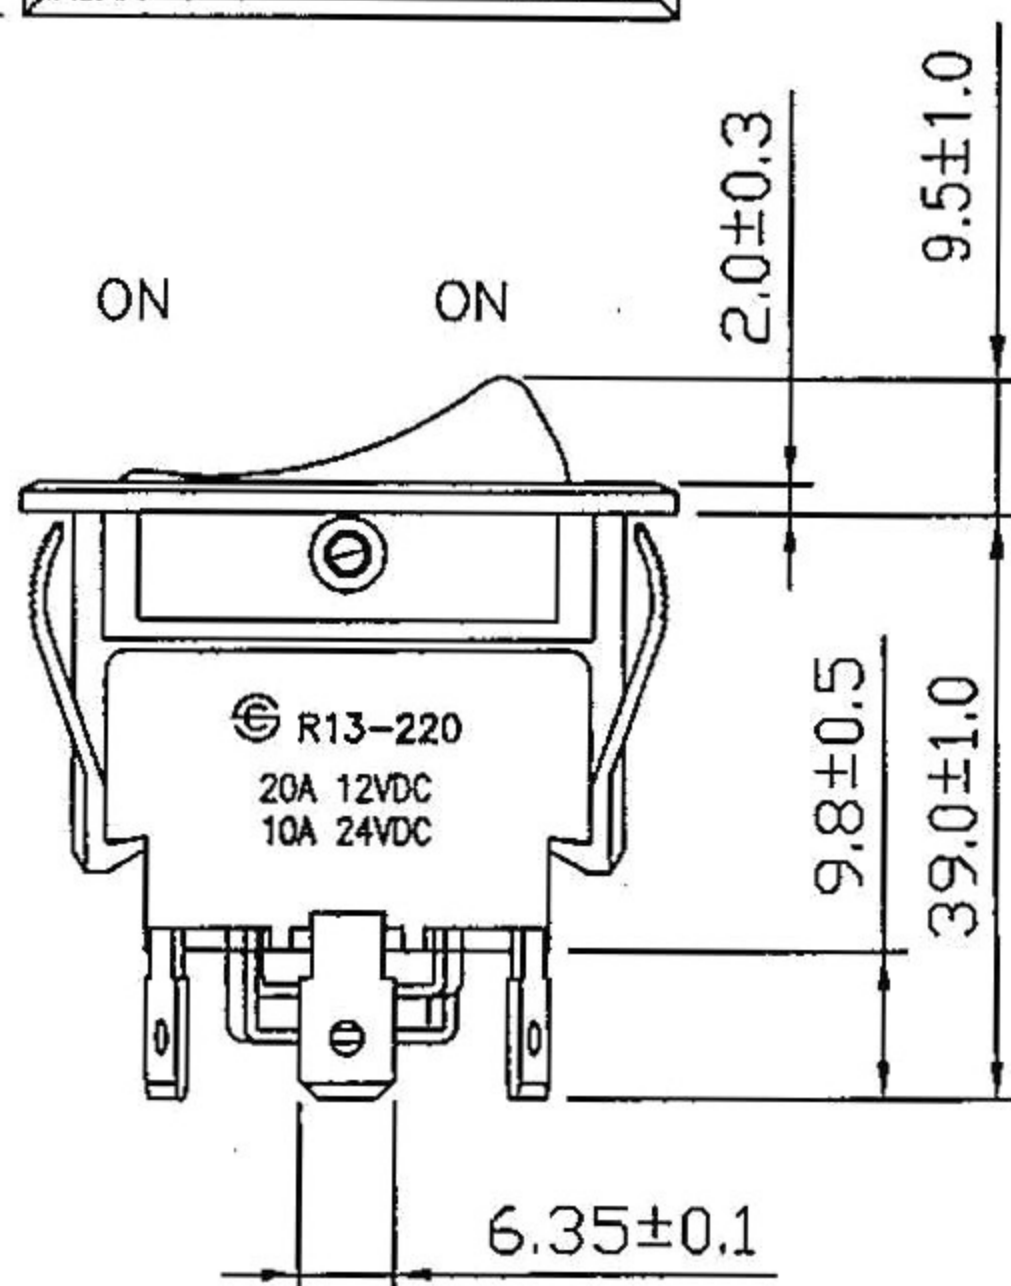
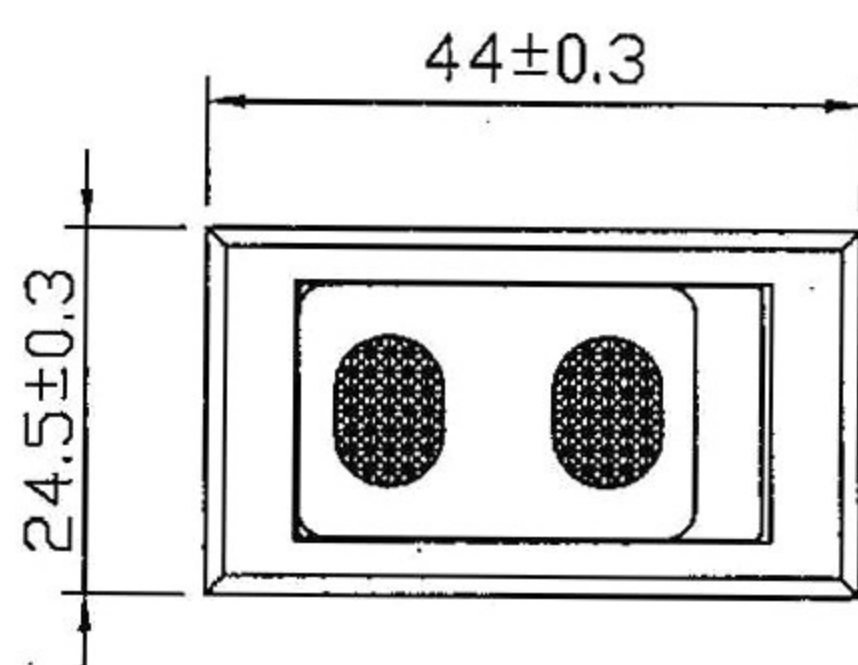



Rating	20A 12VDC, 10A 24VDC	Mounting Hole	Circuit Diagram	
Contact R	50m ohm Max.			
Insulation R	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Circuit Options	4P SPDT ON-ON (Illuminated)			
Operation Force	900±300g			
		Thickness	X	Y
		0.75...1.25	21.2+0.1	37.3-0.1
		1.25...2	21.2+0.1	37.5-0.1
		2...3	21.2+0.1	37.9-0.1



Projects\DC\SR13-220

							△
							△
Date		Name		Descriptions			NO
Drawing	Check	Approval	SCI No.		Model Name	ROCKER SWITCH	
徐洲迎			Customer No.		Model No.	SR13-220BC-01	
5/30/'06	11/7-06	11/8-06	Unit	mm	SWEETA PRODUCTS CORPORATION		