

1、ALL DIMENSIONS IN mm [INCH]

2、GENERAL TOLERANCE : $>10\pm0.4$

$<10\pm0.25$

3、ELECTRICAL RATING : 20A 125VAC, 16A 250VAC; 3/4HP 125VAC, 1HP 250VAC (UL)
15A 250VAC (VDE)

4、CONTACT RESISTANCE : $<20\text{m}\Omega$ (initial)

5、INSULATION RESISTANCE : $>1000\text{M}\Omega$ (500VDC between open contacts)

6、DIELECTRIC STRENGTH : $>1500\text{VAC}$ 1 minute





7、MECHANICAL LIFE : >30000 cycles

8、ELECTRICAL LIFE : >10000 cycles

9、TEMPERATURE RISE AT TERMINAL : Max. 30°C

10、SOLDERABILITY OF TERMINAL : Max 350°C , 3S (no pressure may
be placed on terminals when soldering by hand)

switch circuit

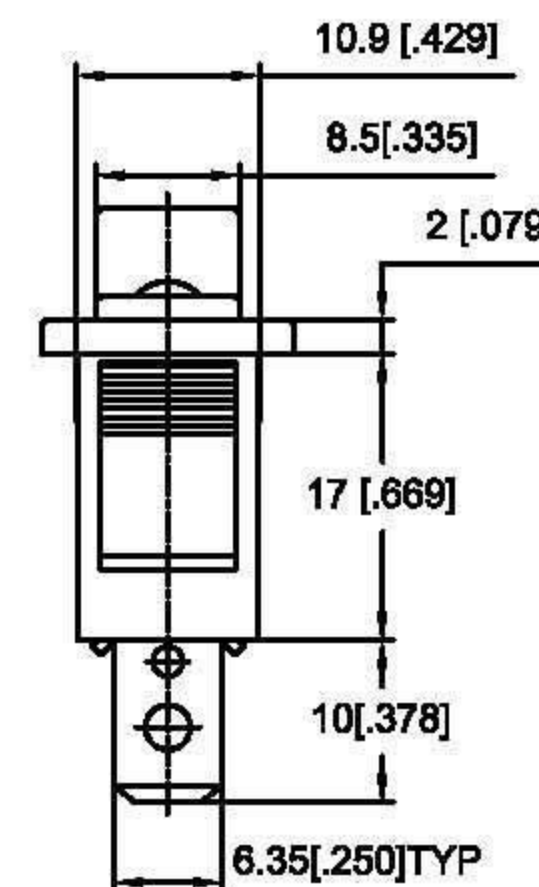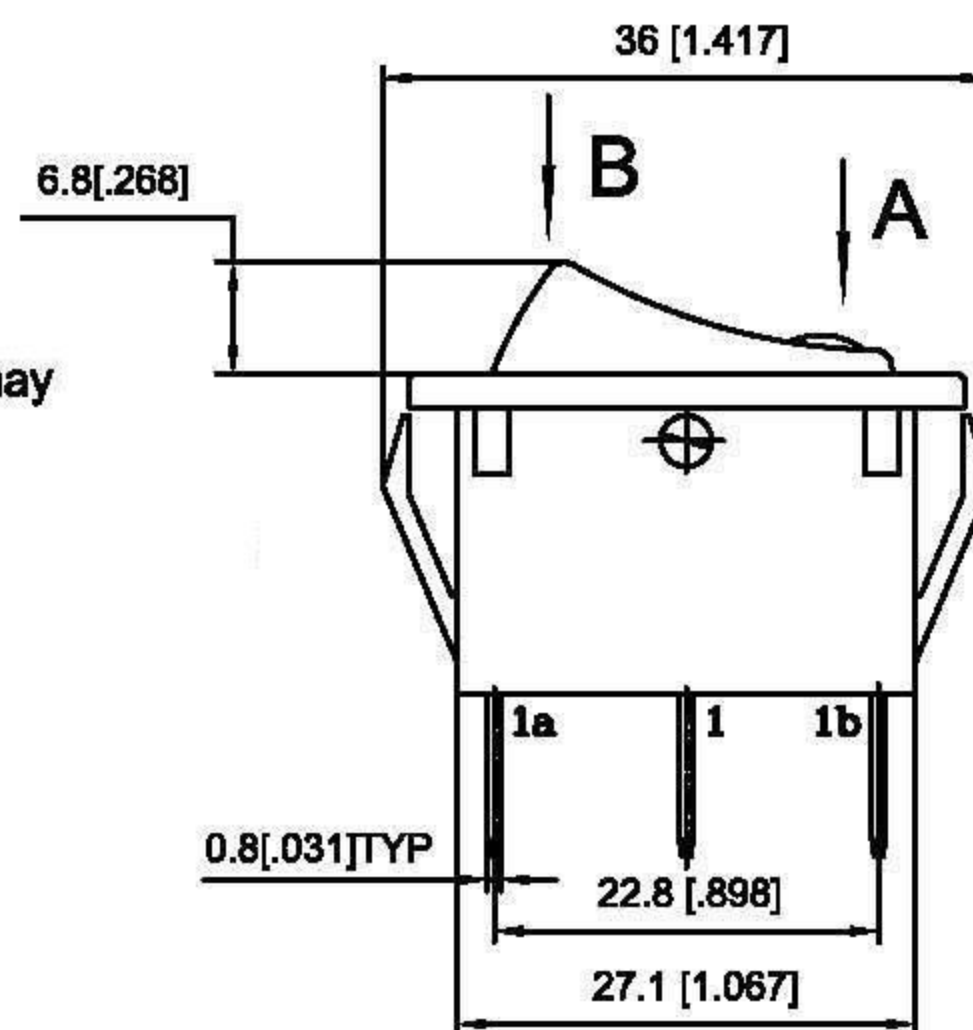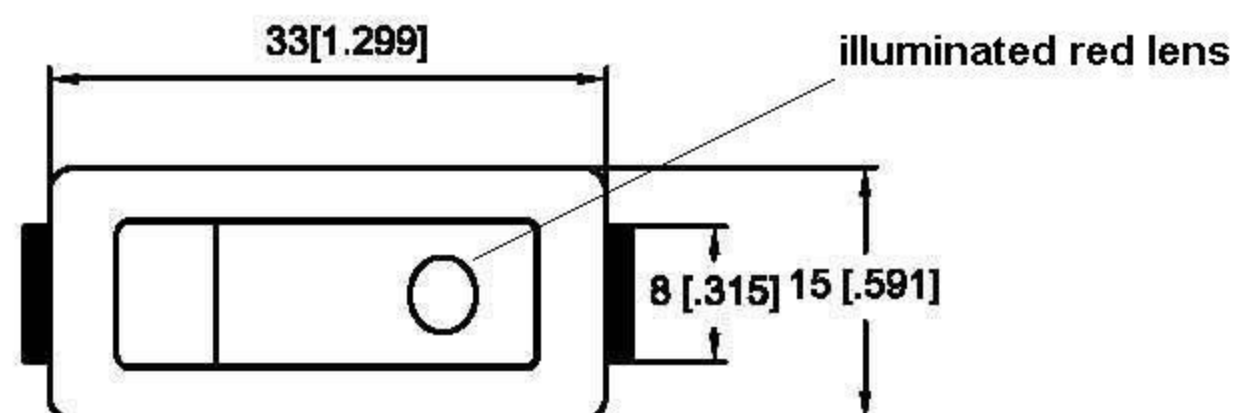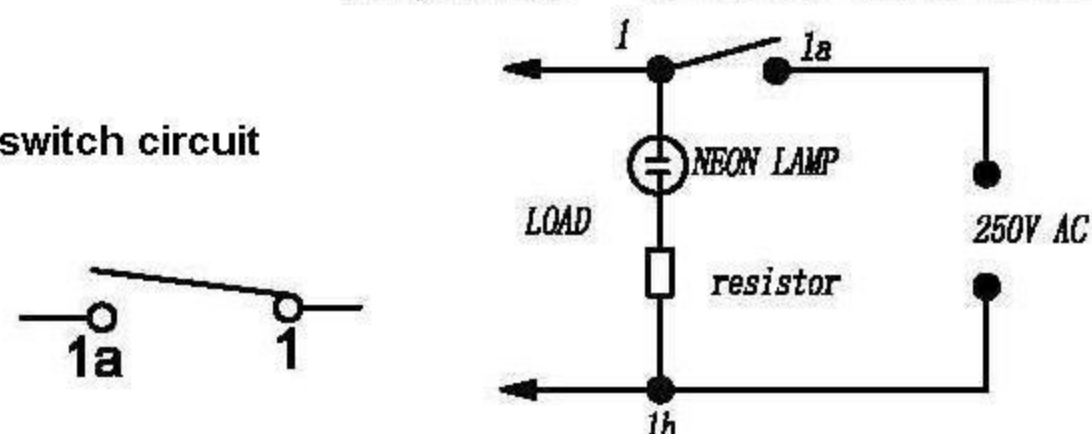


Color	Housing	Actuator
K(Black)	#	#
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		
D(III. Red)		

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
SPST	1-1a	—	OFF

PANEL OUT-CUT

Z	Y	X
0.7~1.25 [.028~.049]	11.1~11.2 [.437~.441]	29.6~29.7 [1.165~1.169]
1.25~2.0 [.049~.079]	11.1~11.2 [.437~.441]	30.1~30.2 [1.185~1.189]
2.0~3.0 [.079~.118]	11.1~11.2 [.437~.441]	30.45~30.55 [1.199~1.203]

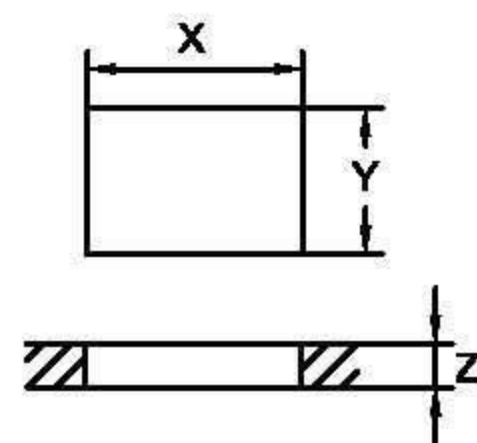

PART NO.	SR495KKDET2F	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION					
DWG. NO.	R492-60824						
SERIES NO.	R4	DRAWING	lizhill	AUDITING	Wangchangjian		
DWG NAME	SPECIFICATION	SCALE	1.5:1	DATE	08/24/06	PAGE	