
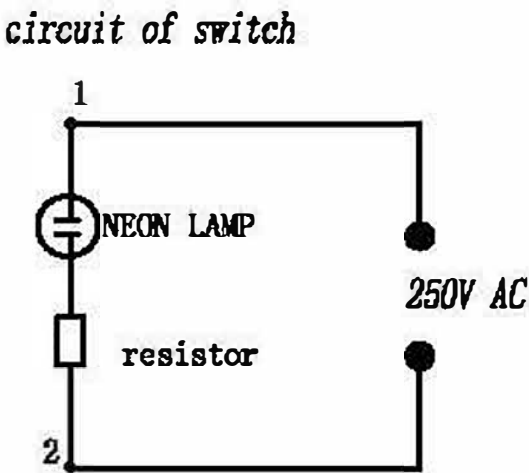
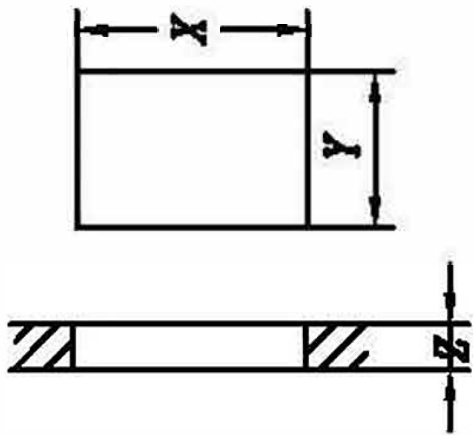
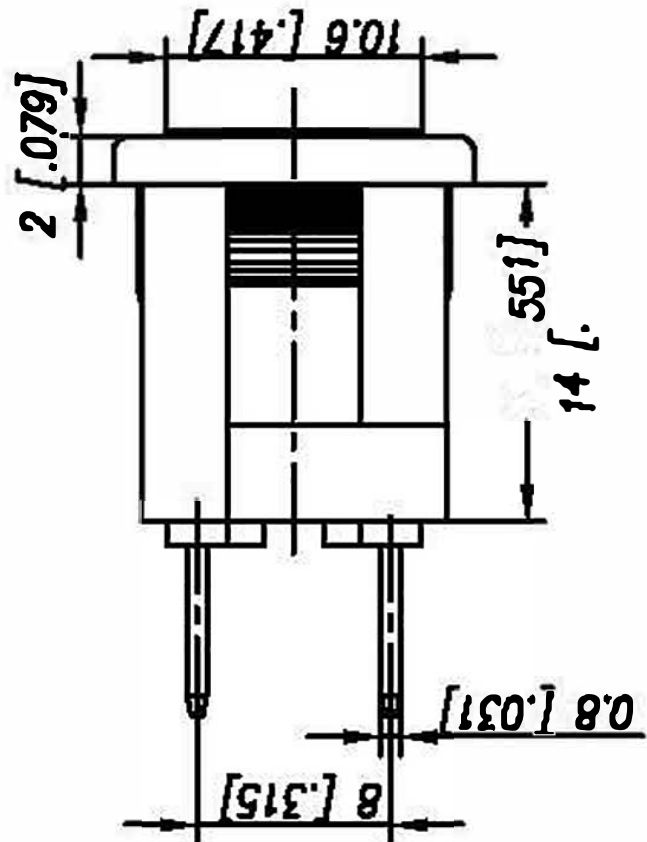
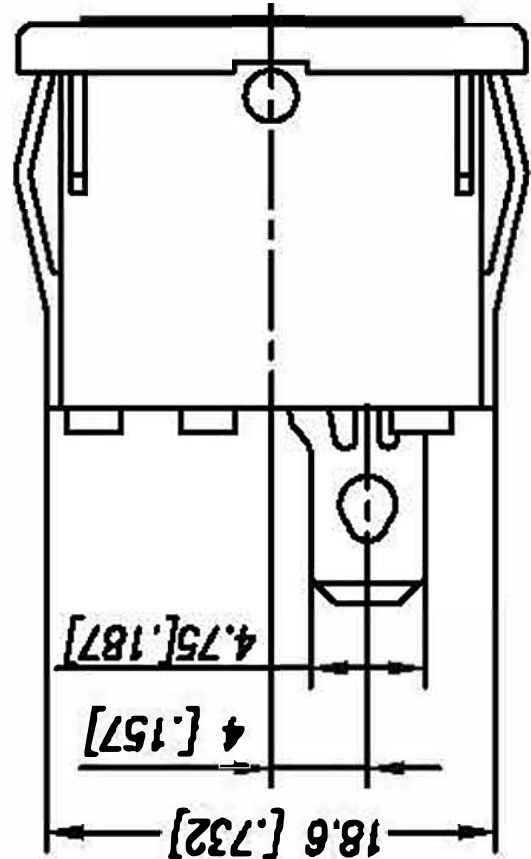


- 1、All dimensions in mm [Inch]
- 2、General tolerance : >10±0.4
<10±0.25
- 3、Electrical rating : 6A 250VAC & 9A 125VAC
4(1)A 250VAC
- 4、Contact resistance:<20mΩ (initial)
- 5、Insulation resistance:>1000MΩ (500VDC between open contacts)
- 6、Dielectric strength:>1500V 1 mintute
- 7、Mechanical life: >30000 cycles
- 8、Electrical life:>10000 cycles
- 9、Temperature rise at the terminal: Max.30℃
- 10、Solder ability of terminal: Max350℃, 3S(no pressure may be placed in the terminals when soldering by hand)
- 11、Any Cd Pb Hg etc and it's compounds is not include in this product

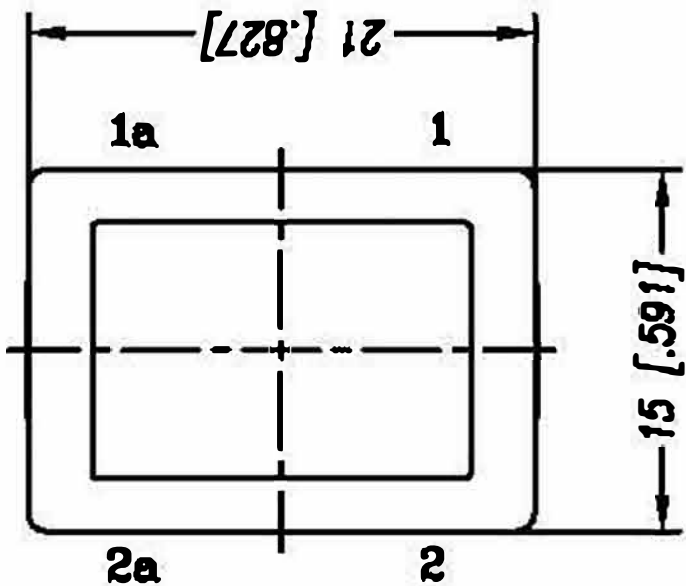

PANEL CUT-OUT		
Z	Y	X
0.7~1.25 [.028~.049]	12.90~13.10 [.508~.515]	19.1~19.2 [.752~.756]
1.25~2.0 [.049~.079]	12.90~13.10 [.508~.515]	19.3~19.4 [.760~.764]
2.0~3.0 [.079~.118]	12.90~13.10 [.508~.515]	19.4~19.6 [.764~.772]
3.0~4.0 [.118~.157]	12.90~13.10 [.508~.515]	19.6~19.8 [.772~.780]

* We keep the right to alter the dimension without notice.

Color	Housing	Actuator
K(Black)		
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(Ill. Yellow)		
M(Ill. Green)		
F(Ill. Blue)		
T(Ill. White)		
D(Ill. Red)	*	*

								ON OFF
A	B	C	D	E	F	G	H	I
				*				

Part NO.	SR9IIKDET2NE2	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION						
Dwg. NO.	SR9II-60829							
Series NO.	SR19	Drawing	lizhili	Auditing	wangchangjian			
Dwg. Name	Specification	Scale	2:1	Date	08/29/06	Page		