



ITEM NO. STGGB-100 SERIES PITCH 8.25mm

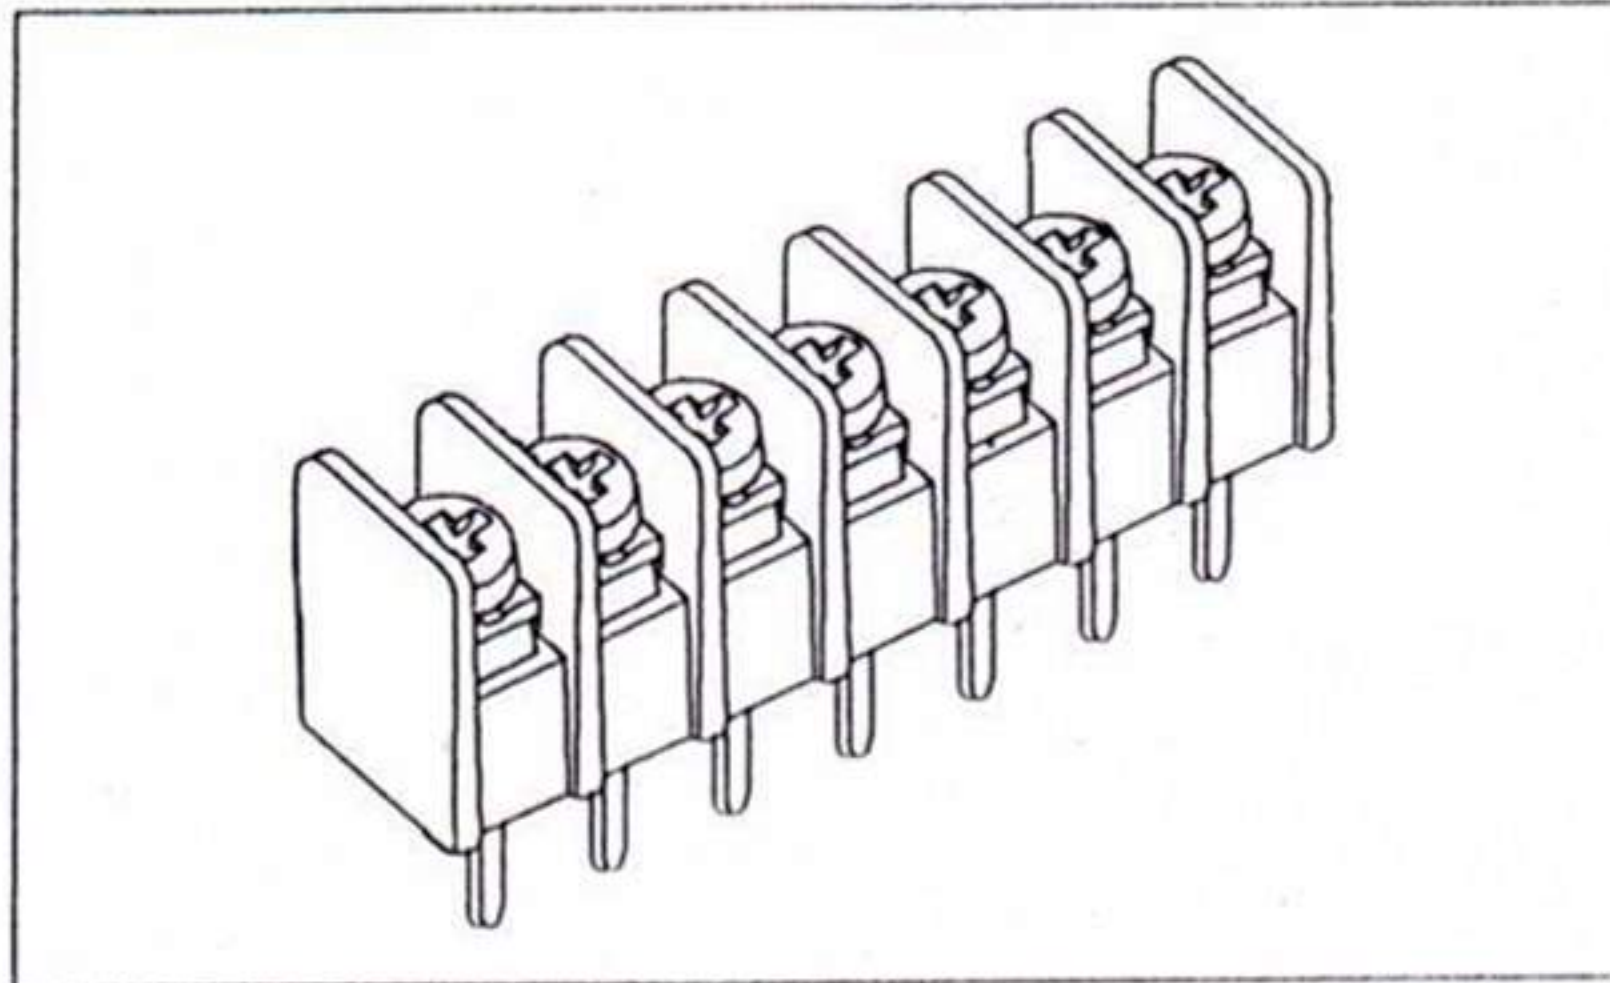

STGGB-100-01

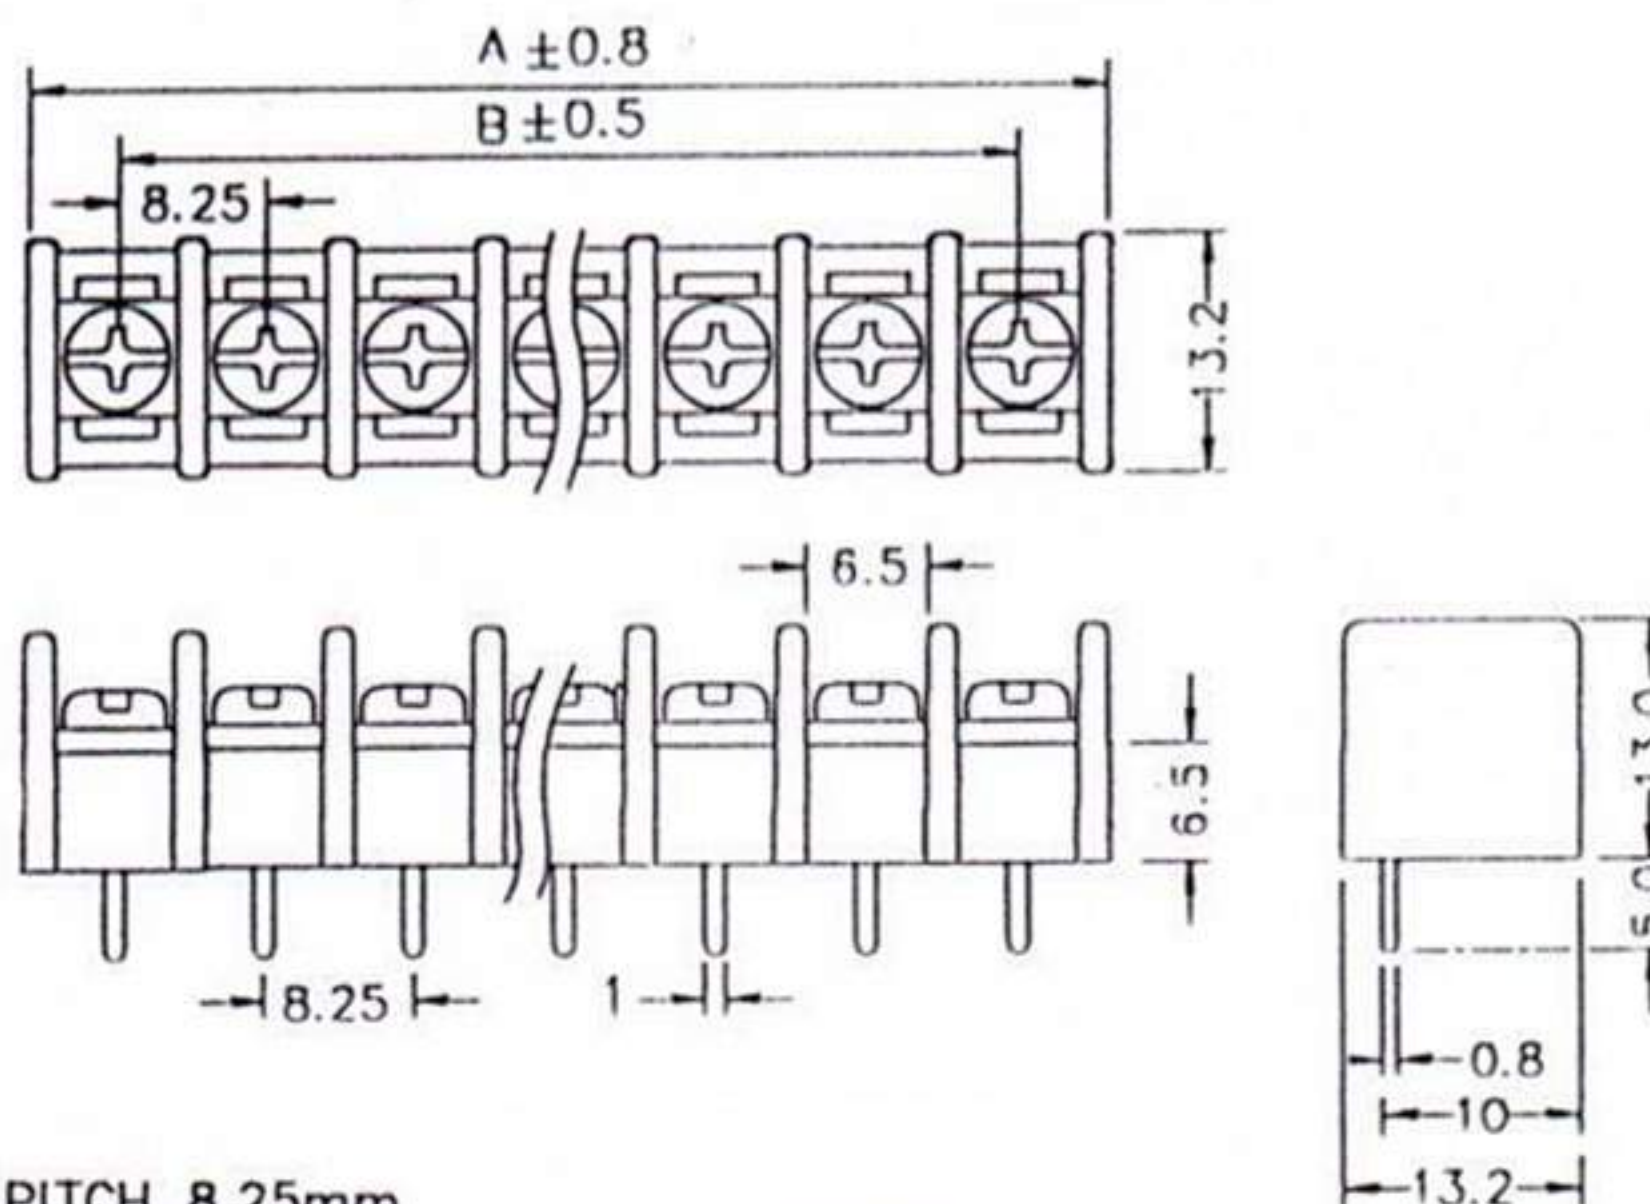

DIMENSION: mm PITCH 8.25mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
$A \pm 0.8$	18.5	26.8	35	43.2	51.5	59.7	68	76.2	84.5	92.7	101	109.3	117.6	125.9	134.1	142.4
$B \pm 0.5$	8.25	16.5	24.75	33	41.25	49.5	57.75	66	74.25	82.5	90.75	99	107.25	115.5	123.75	132

POLE	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
$A \pm 0.8$	150.6	158.9	167.1	175.4	183.6	191.9	200.1	208.4	216.6	224.9	233.1	241.4	249.6	257.9	266.0
$B \pm 0.5$	140.25	148.5	156.25	165	173.25	181.5	189.75	198	206.25	214.5	222.75	231	239.25	247.5	255.75

NUMBER OF POLE 02 ~32

SPECIFICATIONS

Rated: 15A 300VAC
 Insulation Withstands Voltage: AC 2000V/min
 Insulation Resistance: 1000M Ω or More at DC500V
 Using Temperature Range: -40 $^{\circ}$ C ~ +120 $^{\circ}$ C
 Screw Torque Value: 10 Kg-cm
 Wire Range Awg: 14 - 22 STR
 Insulator Body : Plastic NYLON 66 (UL 94V-0)
 Terminals: Brass, Tin Plated 0.8t
 Terminal Screws: M3 Nickel Plated Brass