



ITEM NO. STGGB-20 SERIES PITCH 9.5mm

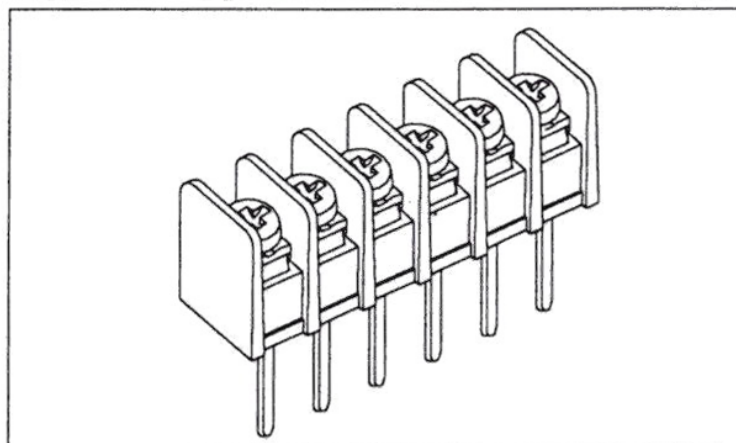

STGGB-20-07

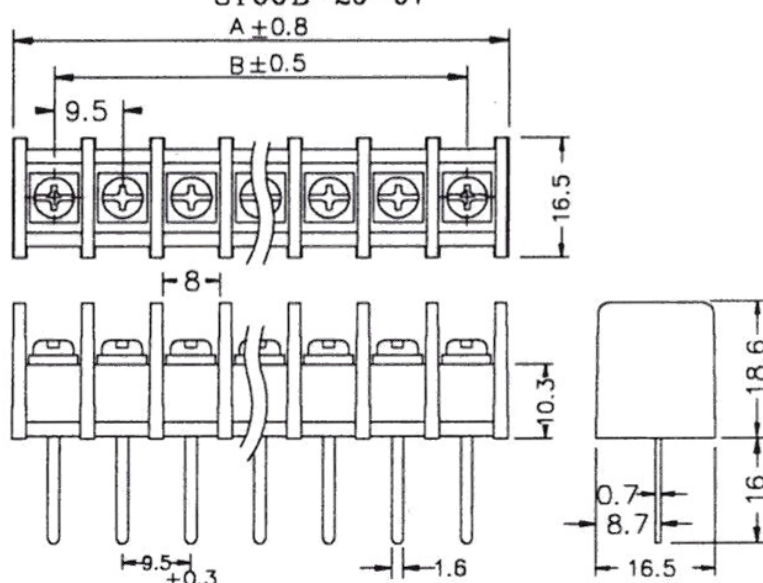

DIMENSION: mm PITCH 9.5mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A±0.8	21	30.5	40	49.5	59	68.5	78	87.5	97	106.5	116	125.5	135	144.5	154	163.5
B±0.5	9.5	19	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114	123.5	133	142.5	152

POLE	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A±0.8	173	182.5	192	201.5	211	220.5	230	239.5	249	258.5	268	277.5	287	296.5	306
B±0.5	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5	285	294.5

NUMBER OF POLE 02 ~32

SPECIFICATIONS

Rated: 15A 300VAC
 Insulation Withstands Voltage: AC 2000V/min
 Insulation Resistance: 500MΩ or More at DC500V
 Using Temperature Range: -40°C ~ +105°C
 Screw Torque Value: 12 Kg-cm
 Wire Range Awg: 12 - 22 STR
 Insulator Body : Plastic NYLON 66 (UL 94V-0)
 Terminals: Brass, Tin Plated 0.8t
 Terminal Screws: M3.5 Nickel Plated Steel