


STCCC-10-01

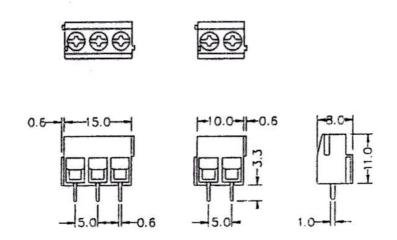

## SPECIFICATIONS

10A 300VAC

Insulation Withstands Voltage: AC 2000V/min

Insulation Resistance: 500M $\Omega$  or More at DC500V

Using Temperature Range: -40°C~+105°C Screw Torque Value: 4 Kg-cm Wire Range Awg: 16 - 22 STR

Insulator Body: Plastic NYLON 66 (UL 94V-0)

Brass, Tin Plated 0.6t Terminals: Terminal Screws: M2.6 Nickel Plated Brass