



ITEM NO. STGGE-30 ESRIES PITCH 14.0 mm

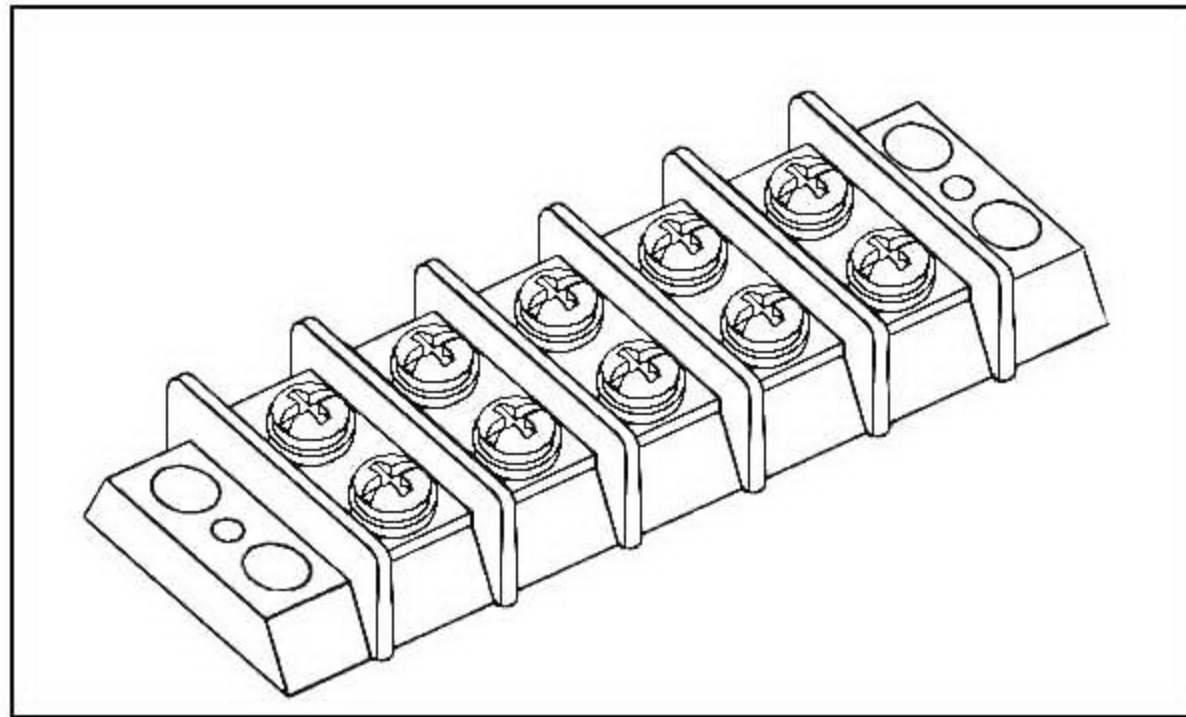

STGGE-30

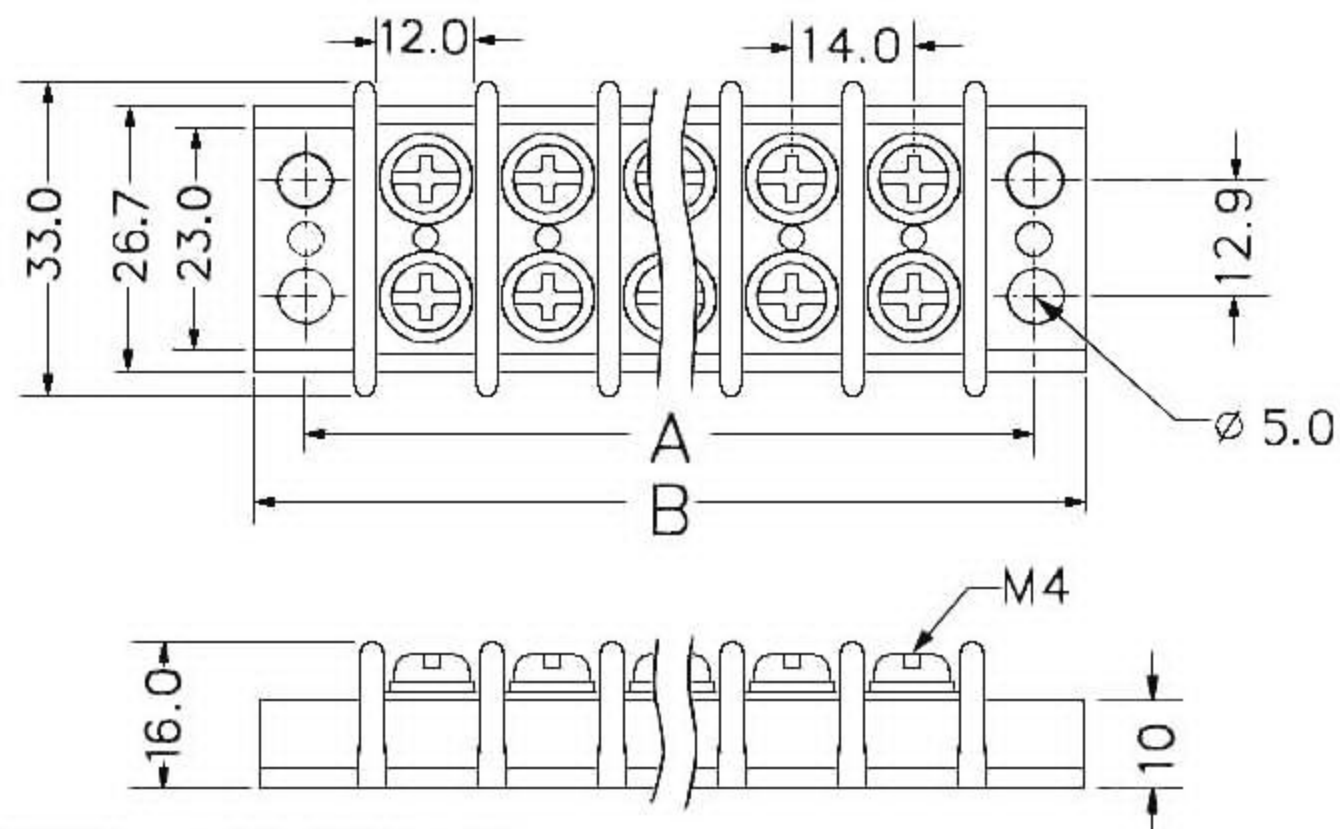

DIMENSION : ± 0.8 PITCH 14.0 mm

P數	2	3	4	5	6	7	8	9	10	11	12	13
A	42	56	70	84	98	112	126	140	154	168	182	196
B	52	66	80	94	108	122	136	150	164	178	192	206

P數	14	15	16	17	18	19	20	21	22	23	24
A	210	224	238	252	266	280	294	308	322	336	350
B	220	234	248	262	276	290	304	318	332	346	360

SPECIFICATIONS

Rated:	30A 300VAC
Insulation Withstands Voltage:	AC 2000V/min
Insulation Resistance:	500M Ω or More at DC500V
Using Temperature Range:	-40 $^{\circ}$ C~+105 $^{\circ}$ C
Screw Torque Value:	18 Kg-cm
Wire Range Awg:	12 - 18 STR
Insulator Body :	Plastic NYLON 66
Terminals:	Brass, Tin Plated 0.8t
Terminal Screws:	M4 Nickel Plated Steel