


喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

	PARTS NAME	MATERIAL	UL FLAME GRADE
1	Sensing cap	Aluminum	
2	Actuating pin	Ceramic	
3	Bimetal disc	Bimetal	
4	Retainer	pps	94V-0
5	Contact-F	Silver alloy	
6	Contact-R	Silver alloy	
7	Rivet-S	Brass alloy	
8	Terminal	Brass tin plated	
9	Case	pps	94V-0
10	Movable arm	Beryllium copper	
11	Stationary arm	Brass	
12	Bracket	Stainless steel	


SPECIFICATIONS

- * CONTACT TYPE : Normally Closed
- * ACTION TEMP : $60 \pm 3^{\circ}\text{C}$
- * RESET TEMP : $50 \pm 4^{\circ}\text{C}$
- * TERMINAL SIZE : Amp #250 TAB
- * CIRCUIT RESISTANCE : $50\text{m}\Omega$ Or Less
- * INSULATION RESISTANCE : $>100\text{M}\Omega$
- * DIELECTRIC STRENGTH : AC 1000V For One Minute
Or AC 1500V For One Sec
- * APPROVALS: UL CUL VDE
- * ELECTRICAL RATING & OPERATING LIFE :
UL CUL - 10A 250VAC/15A 125VAC 100,000 Cycles
(Resistive Load) Licence No. E192925
- VDE - Pending
(By Standard Differential:10k~15k)

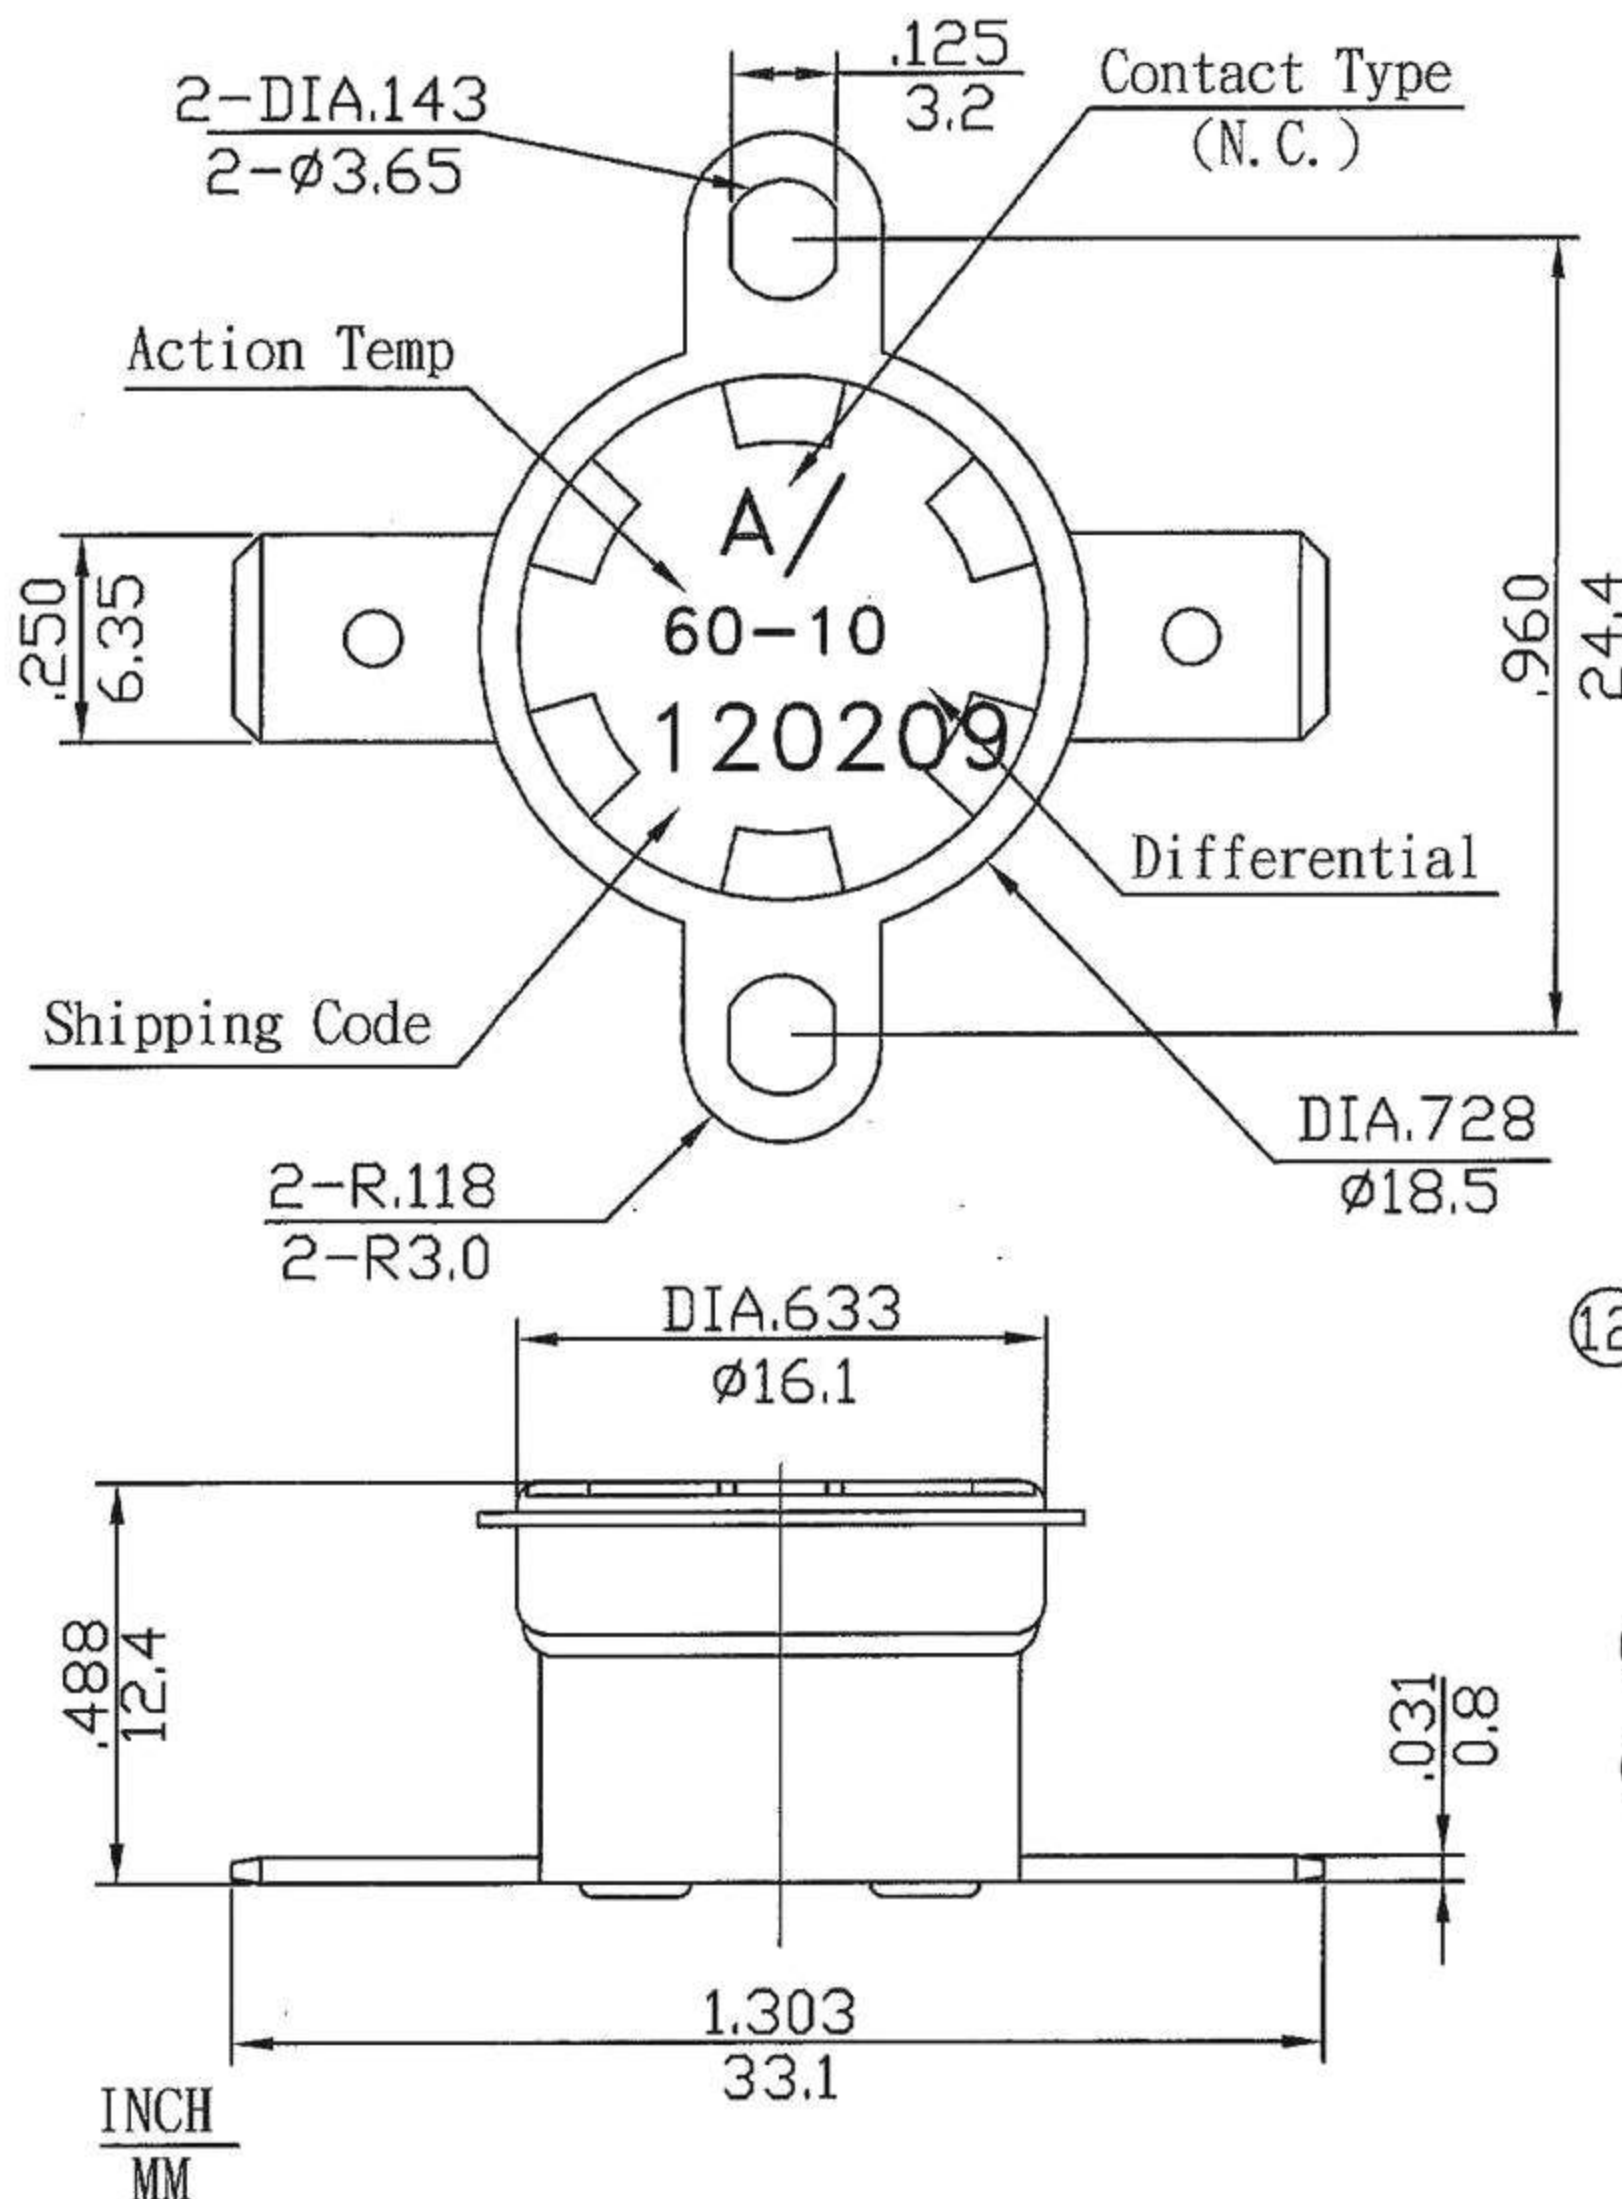

12 F 09
09th
February Month
2012 Year

Shipping Code

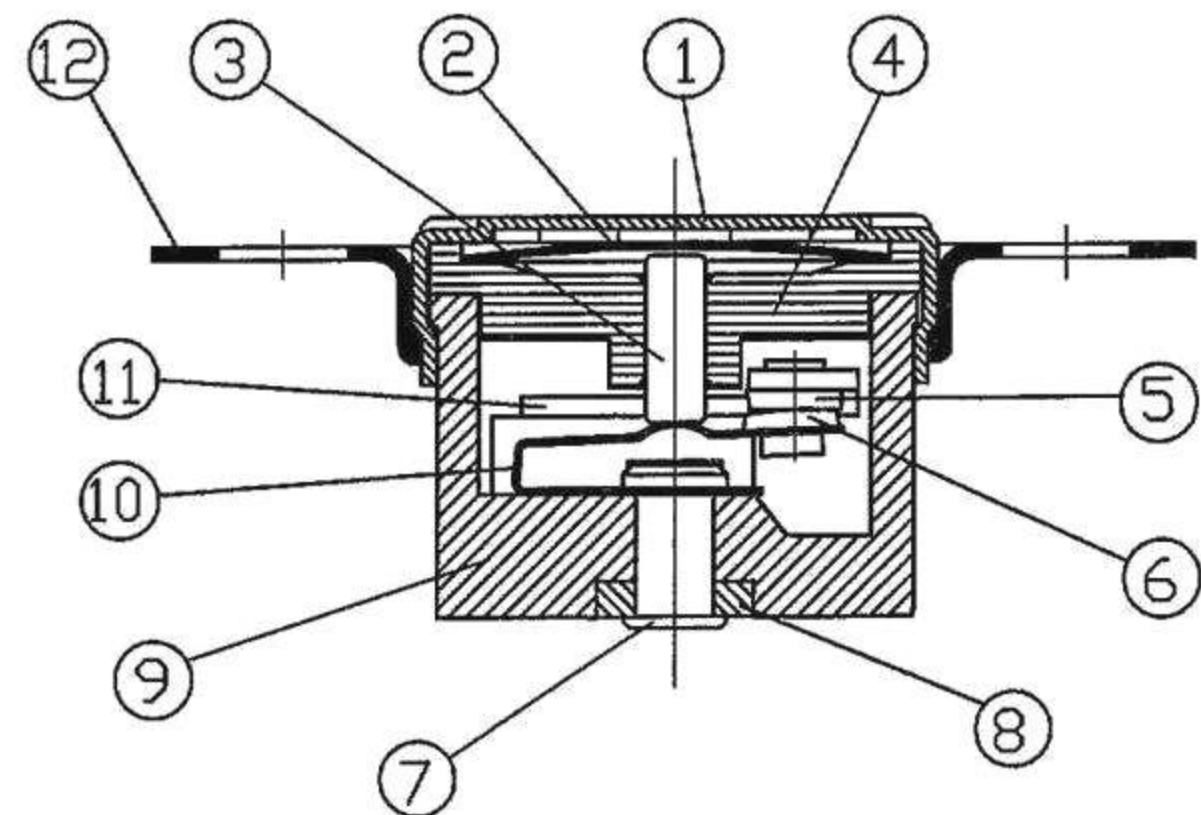

The size remains unchanged, but other technical modification will be made without notice.

SCALE	2:1 (mm)
-------	----------

④				TITLE
③				MODEL SWT24A060AUF2-10
②				MATERIAL NO.
①				MATERIAL
REV	DESCRIPTION	DFTG.	DATE	DRAWING NO.
DFTG	JAYE	CHKD	MFG.	APRVL