


Panel Cutout

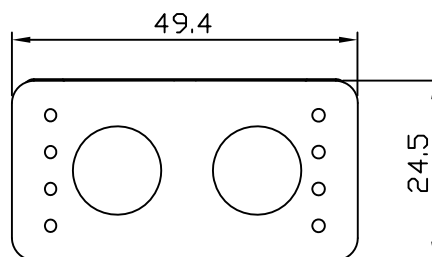

Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute





Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating : 25A 12V DC

Circuit: ON - OFF - ON SPDT

POS 1 POS 2 POS 3
RED LED AMBER LED

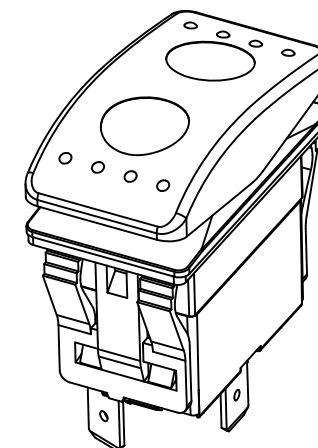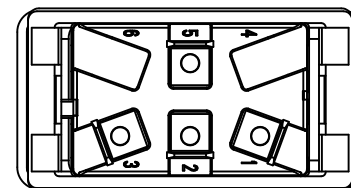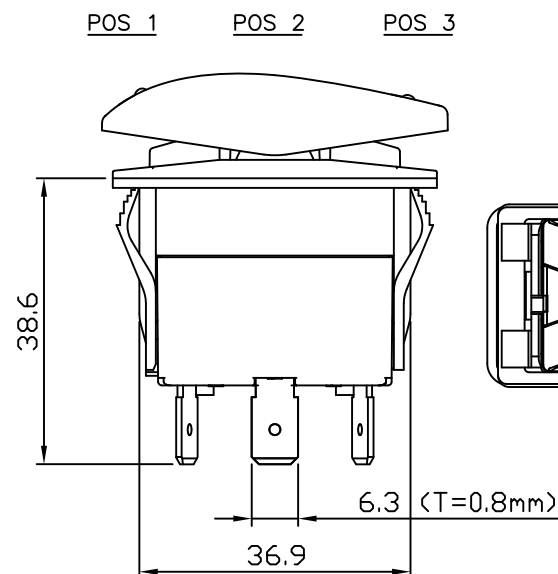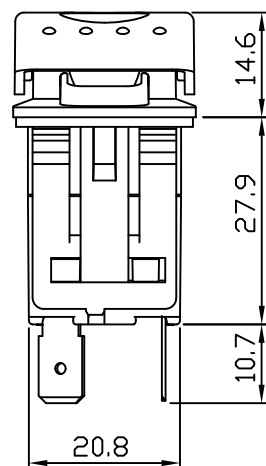

<u>TOLERANCES</u> X. ± 0.3 X.X ± 0.2 X.XX ± 0.1			<u>UNLESS NOTED</u> MIN WALL THICKNESS MAX. DRAFT 2 / SIDE ALL RADII					
DATE: 3-23-2009		DRAWN: C.H. SHI		PROJ: W. D. CHEN		EX.NO.		
NAME Sealed Rocker Switch								
UNIT m/m		SCALE 1 : 1		PROD. NO SR -2894-A3G9-2L			REV. W.H. YEH	

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Material :

Finished :