
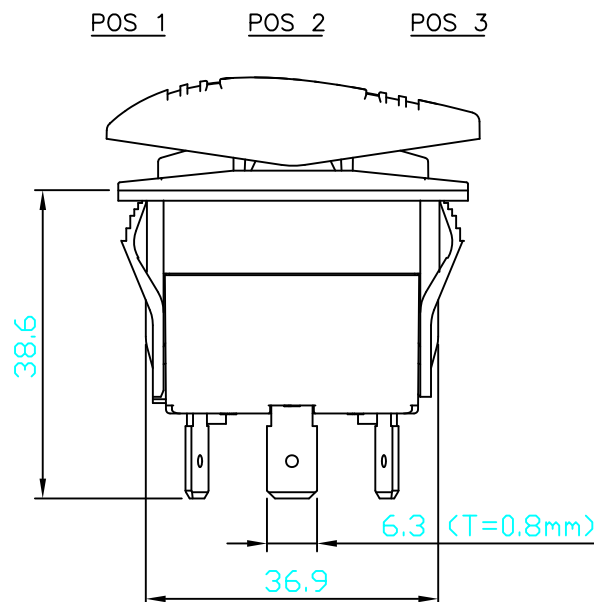
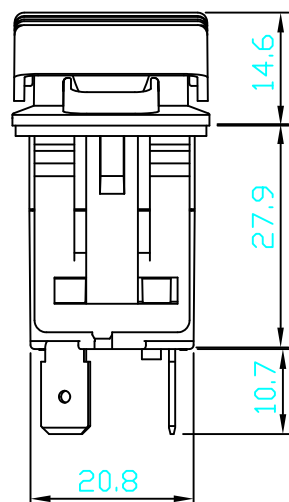


Panel Cutout

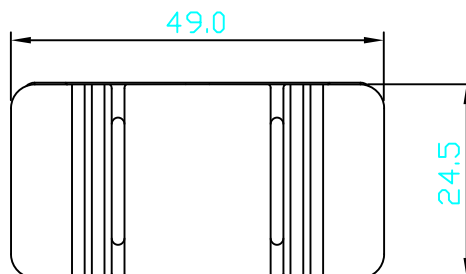

Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute


Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating : 25A 12V DC

Circuit: (ON) - OFF - ON SPDT

POS 1 Red LED POS 2 POS 3 Amber

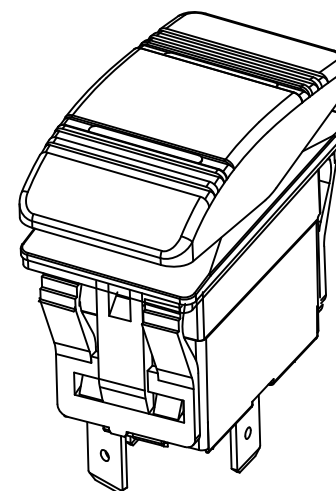

<u>TOLERANCES</u> X. ± 0.3 X.X ± 0.2 X.XX ± 0.1			<u>UNLESS NOTED</u> MIN WALL THICKNESS MAX. DRAFT 2 / SIDE ALL RADII	
DATE :	DRAWN :	PROJ :	EX.NO.	
3-23-2009	C.H. SHI	W. D. CHEN		
NAME Sealed Rocker Switch				
UNIT	SCALE	PROD. NO	REV.	
m/m	1 : 1	SR-2894-B3M1-2L	W.H.YEH	

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Material :

Finished :