
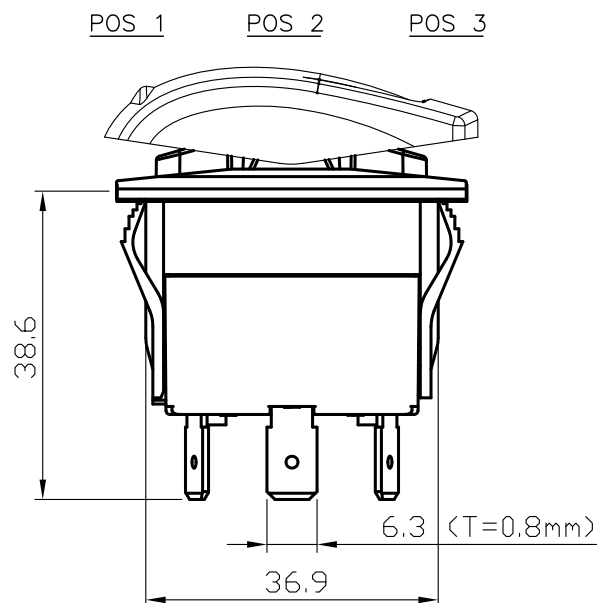
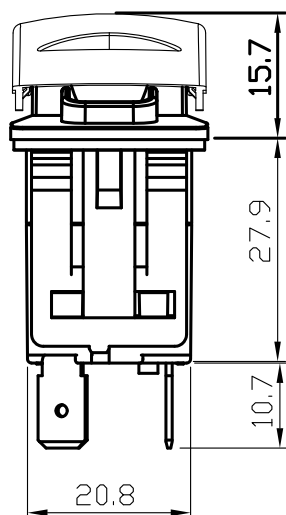


Panel Cutout

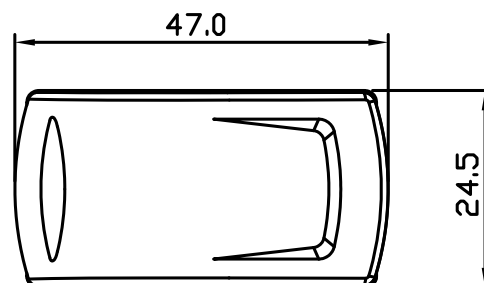

Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute


Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating : 25A 12V DC

Circuit: (ON) - OFF - (ON) SPDT

POS 1 Red LED
POS 2
POS 3 Red LED

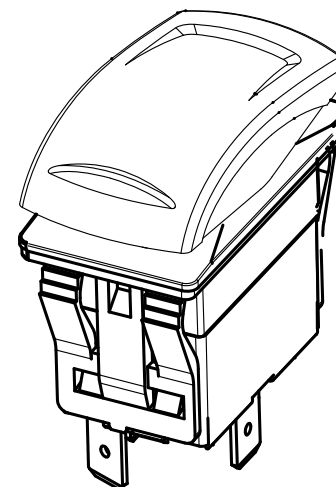

TOLERANCES		UNLESS NOTED	
X.	± 0.3	MIN WALL THICKNESS	
X.X	± 0.2	MAX. DRAFT 2 / SIDE	
X.XX	± 0.1	ALL RADII	
DATE:	DRAWN:	PROJ:	EX.NO.
3-23-2009	C.H. SHI	W. D. CHEN	
NAME			
Sealed Rocker Switch			
UNIT	SCALE	PROD. NO	REV.
m/m	1 : 1	SR-2894-D3M2-2L	W.H.YEH

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Material:

Finished: