






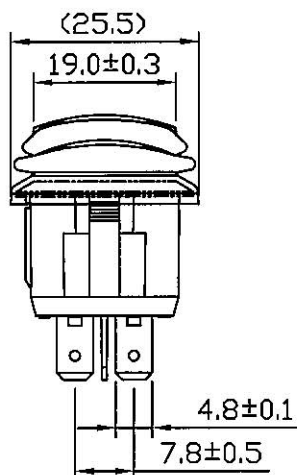



Rating	16A 125VAC 10A 250VAC		Mounting Hole	
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	4P DPST ON-OFF(Neon dependent)			

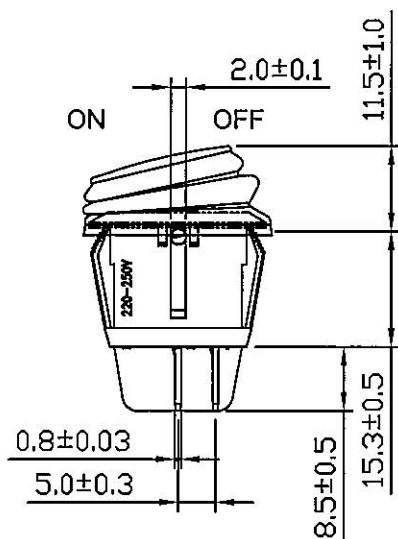

Frame: Nylon 66, Black
 Actuator: PC, Red clear
 Waterproof rubber: Silicone
 Terminals: Silver plated, Copper alloy
 Printed: None
 Waterproof: IP65

Circuit Diagram



									△
									△
03/21/'14	曹 盈 芳	依公司規定本體追加SCI logo							△
Date	Name	Description							NO
Drawn	Checked	Approved	SCI BOM NO.	1824158	Model Name	ROCKER SWITCH			
曹 盈 芳			Customer No		Model No.	SR13-244B8-02	Rev.		
03/21/'14		3/21/14	Unit	mm	SWEETA PRODUCTS CORPORATION				1