

Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP 16(4)A 125/250Va.c		Mounting Hole	Circuit Diagram									
Contact Resistance	50m ohm Max.			ON									
Insulation Resistance	DC 500V 100M ohm Min.												
Dielectric Strength	AC 1500V 1 minute			OFF									
Operation Temperature	-25°c~85°c												
Switch Function	3P SPST ON-OFF(Neon dependent)		<table><tr><td>Thickness</td><td>X</td><td>Y</td></tr><tr><td>0.75....1.5</td><td>19.4-0.1</td><td>13+0.1</td></tr><tr><td>1.5....2.5</td><td>19.8-0.1</td><td>13+0.1</td></tr></table>	Thickness	X	Y	0.75....1.5	19.4-0.1	13+0.1	1.5....2.5	19.8-0.1	13+0.1	
Thickness	X	Y											
0.75....1.5	19.4-0.1	13+0.1											
1.5....2.5	19.8-0.1	13+0.1											

Material:

Frame: Black, Nylon 66 (94-V2)





Actuator: PC clear (94-V2)

Waterproof Rubber: Silicone

Terminals: Silver plated, Copper alloy

Printed: None

Waterproof: IP65

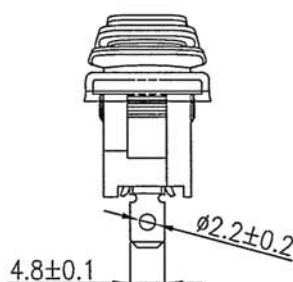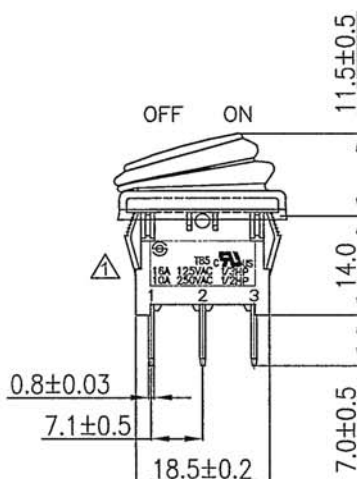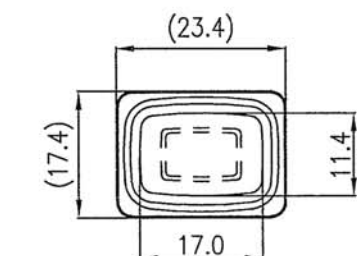

COLOR SCI No.	Frame	Actuator	Waterproof Rubber
1824272	Black	Red	Black
1824273	Black	Green	Black
1824274	Black	Yellow	Black

Tolerances ±0.3 Unless Otherwise Specified

08/31/'17	曾敏捷	依營業要求,將圖號改為SR13-66B8-02					
11/21/'14	黃洋	依實物更新本體刻字,更新圖面					
Date	Name	Description					No.
Drawn	Checked	Approved	SCI BOM No.	SEE TABLE	Model Name	ROCKER SWITCH	
曾敏捷			Customer No.		Model No.	SR13-66B8-02	Rev. X2
08/31/'17	8/31-'17	8/31-'17	Unit	mm	SWEETA PRODUCTS CORPORATION		