

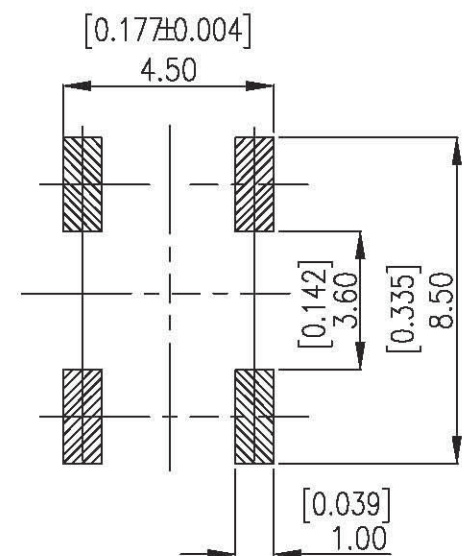
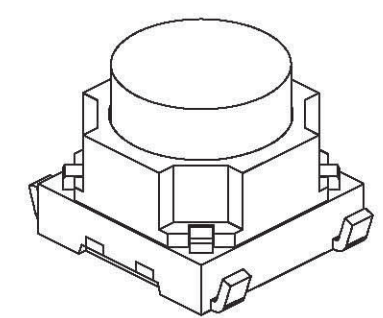
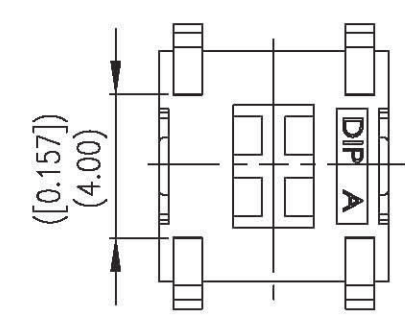
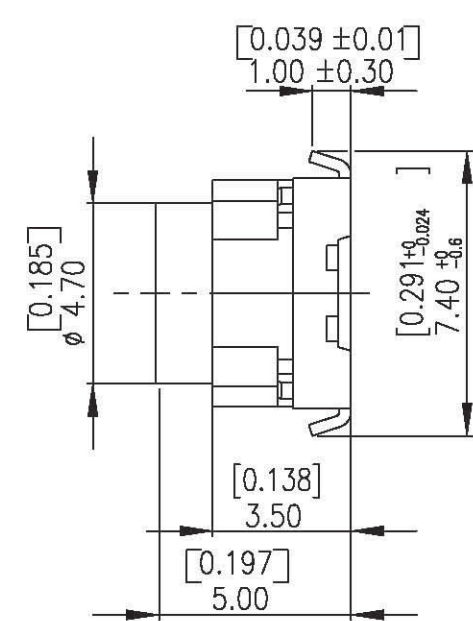


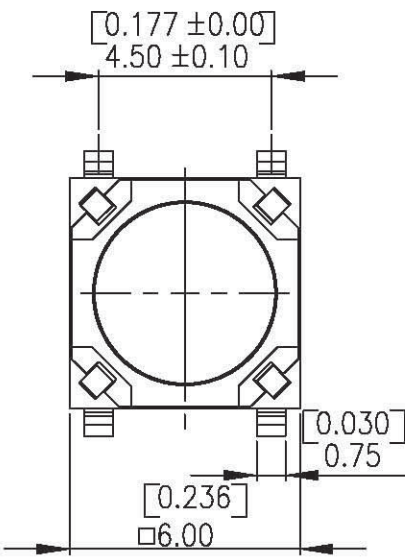

P.C.B. LAYOUT




CIRCUIT DIAGRAM

NOTE:
1.ALL DIMENSIONS ARE IN MILLIMETER,BRACKETED
DIMENSIONS ARE IN INCHES.
2.GENANAL TOLERANCES $\pm 0.20\text{mm}$.

△				
△				
△				
△	A1	DWG.REL		
ZONE	REV.	DESCRIPTION	DATE	APPD.

APPD:	QTY:	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION		PART NAME: Long Travel SMT Tactile Switch	
CHKD:	SCALE: 7:1			DWG NO: R D 6 P L	
DR: 張文逸	REV: A1	UNITS: mm	PART NO: SLTL-6		
DESIGN: 張文逸			MAT'L: FINISH:		

ITEM	DESC	Q'TY	MATERIALS	TREATMENT	REMARK
1	Stem	1	HIGH-TEMP THERMOPLASTIC NYLON UL 94V-0	Color : Red	-
2	Silicone Dome	1	Silicone rubber with metal contact	With Gold Plating	-
3	Base	1	HIGH-TEMP THERMOPLASTIC NYLON UL 94V-0	Color : Black	-
4	Cover	1	HIGH-TEMP THERMOPLASTIC NYLON UL 94V-0	Color : Black	-
5	Terminal	1	BRASS	With Silver Plating	-

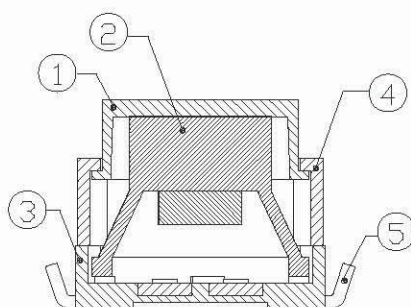

SLTL-6 13 □ V-T/R

Package Style :
T/R= Tape & Reel

Soldering :
V=Lead Free Solderable

Color of Stem for
Operating Force :
R= 200gf

Travel:
13= 1.3mm

Prod. Size:
6 X 6 mm

Terminal Type :
L= With L S.M.T terminal

Long travel Tact Switch

A1	DWG.REL	
REV.	ECO. NO.	APPD.

TITLE:		APPD. :	
Long Travel Tact Switch		CHKD. :	
PRROD. NO. : SLTL-613□-V-T/R		PR. :	
FILE NO. : E-V-CT50		REV : A1	SHEET : 1 of 1